



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The SRDIS LED is a specification grade LED surface mounted direct/indirect center diffuser luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings. Reflected light from matte surfaces providing a softened perforated appearance to the modern office environment.

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal. Listed by and bears ETL label.




FEATURES & BENEFITS


- Direct/indirect provides a low glare light source
- Matte white reflective surfaces for soft, uniform light distribution
- Multiple diffuser options available
- Over 80% efficiency when used with frosted and acrylic diffuser
- 0-10V dimming driver standard
- Easy access plate for quick wiring
- ETL_{us} listed for damp locations

DIMENSIONS

2X2

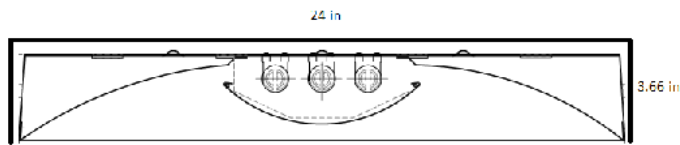

TRANSVERSAL VIEW

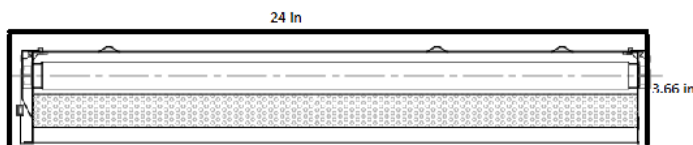

LONGITUDINAL VIEW

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

DIMENSIONS

2X4

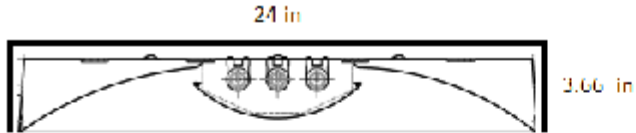


TRANSVERSAL VIEW

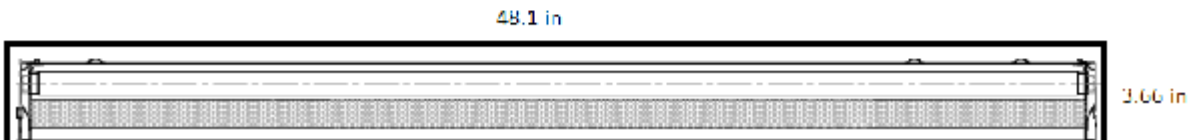


1X4

LONGITUDINAL VIEW

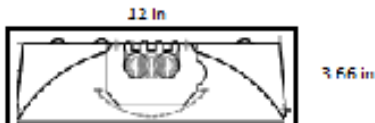

TRANSVERSAL VIEW

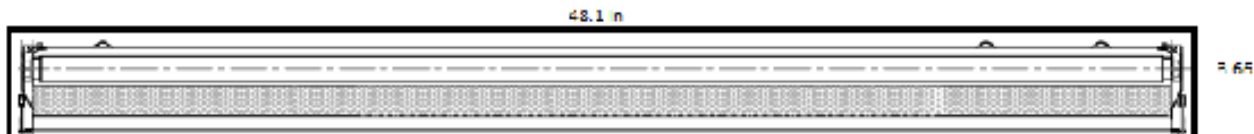

LONGITUDINAL VIEW

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SRDISE 14 LED 15 DMV FR 30 EM SNS200

SRDIS		LED																																			
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. DIFFUSER	7. COLOR TEMP	8. EM																														
SRDIS	14	1X4	LED	<u>1x4</u>		DMV	Dimming multivolt 120-277V 0-10V	FR	Frosted	30	3000K	EM	10 Watt 1300 Lumen Battery Backup																								
	22	2X2		28	28W 3200 Lumens									PF	Perforated Basket	35	3500K	EM4F	Emergency Bat- tery Backup 4W ~450 Lumens																		
	24	2X4		32	32W 3620 Lumens															RL	Ribbed Acrylic Lens	40	4000K	EM7	Emergency Battery Pack 7W ~ 1300 Lumens												
				48	48W 5450 Lumens																					EM5		50	5000K		Emergency Battery Pack 5W ~ 850 Lumens						
				57	57W 6080 Lumens																																
				60	60W 6430 Lumens																																
				<u>2x4</u>																																	
				28	28W 3200 Lumens																																
				32	32W 3620 Lumens																																
				48	48W 5450 Lumens																																
				57	57W 6080 Lumens																																
				60	60W 6430 Lumens																																
				62	62W 6900 Lumens																																
				72	72W 7000 Lumens																																
				<u>2x2</u>																																	
				20	20W 2125 Lumens																																
				24	24W 2700 Lumens																																
				28	28W 2980 Lumens																																
				30	30W 3200 Lumens																																
				35	35 W 3500 Lumens																																
				42	42W 4080 Lumens																																
				48	48 W 6155 Lumens																																

Lumens are subject to a tolerance of ±10%. Wattage is approximate and subject to a tolerance of ±5%

NOTES:

¹Consult factory for Step Dimming Options

Dimensions and specifications subject to change without notice.

