



JOB NAME:


CAT#:

TYPE:

### APPLICATIONS

Low profile surface dual basket SRDISD is a specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened “sky light” appearance to the modern office environment.

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers are perforated to maintain even brightness, and provided with an internal, acrylic overlay to obscure LED boards. Listed by and bears UL label.

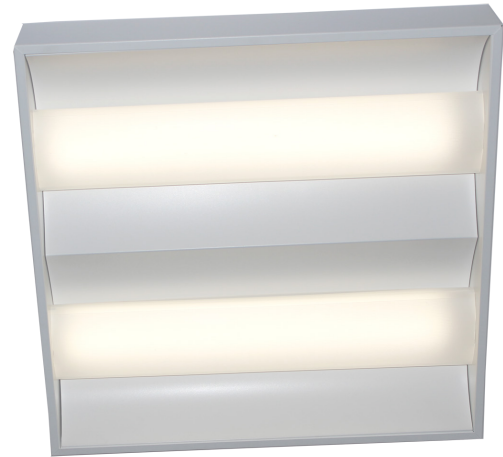


### FEATURES & BENEFITS

- Direct/indirect mimics “sky light” appearance
- Matte white reflective surfaces for soft, uniform light distribution
- Over 80% efficiency when used with frosted and acrylic diffuser
- Surface dual frosted diffuser with acrylic overlay
- 0-10V dimming driver standard
- ETL Listed

### DIMENSIONS

#### 1x4 View

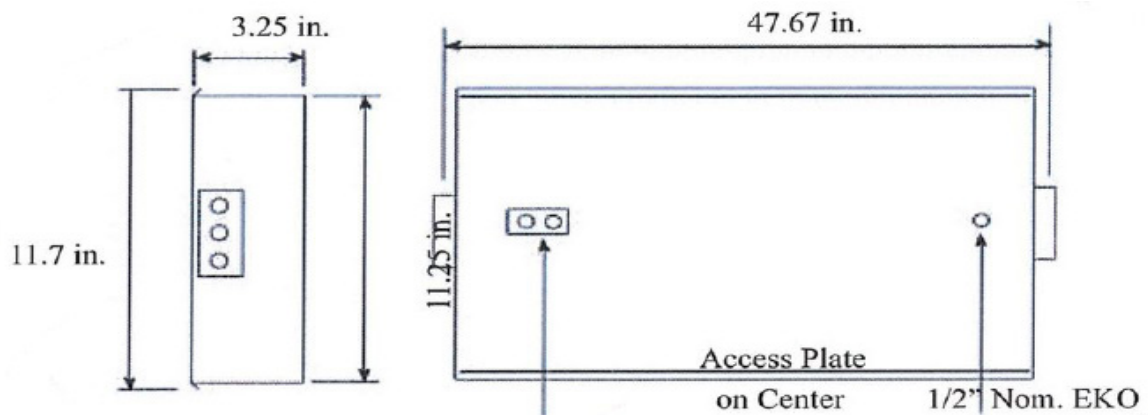

Dimensions and specifications subject to change without notice.






JOB NAME:

CAT#:


TYPE:

**DIMENSIONS**

**2x2 View**

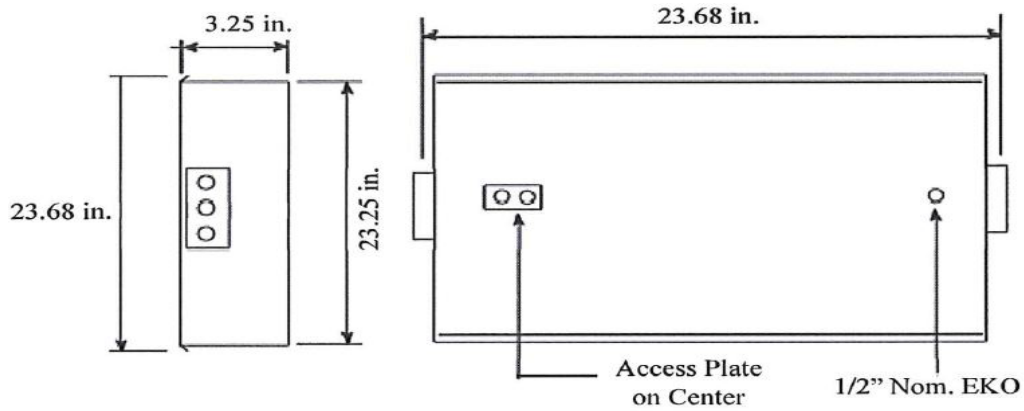

**2x4 View**

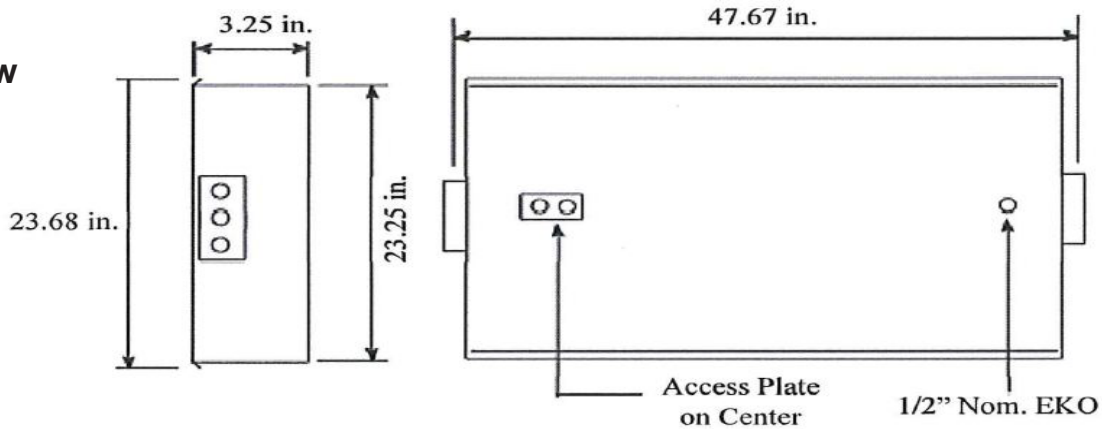

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: SRDISD 22 LED 24 FR DMV 30

SRDISD		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DIFFUSER		6. DRIVER		7. COLOR TEMP	
SRDISD	22 2X2 24 2X4	LED	<u>2x2</u>		FR	Frosted	DMV	Dimming multivolt 120-277V 0-10V	30	3000K
			24	24W 2725 Lumens	RL	Ribbed Lens			35	3500K
			28	28W 2700 Lumens	PF	Perforated Basket			40	4000K
			47	47W 4330 Lumens					50	5000K
			<u>1x4</u>							
			32	32W 3600 Lumens						
			48	48W 5450 Lumens						
			<u>2x4</u>							
			48	48W 5450 Lumens						
			60	60W 6600 Lumens						
			85	85W 8675 Lumens						

\*Call factory for additional options

Dimensions and specifications subject to change without notice.

