



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

Introducing the Mobern VT-LED premium grade enclosed and gasketed vaportight fixture. This energy-saving high performance LED Vaportight is ideal for both indoor and outdoor applications where dust and water resistance is required. Ideal for use in food processing, cold storage, kitchens, parking garages, car washes, covered canopies, pedestrian tunnels, concourses, and industrial settings.

Fiberglass fixture featuring a unique continuous poured gasket which completely fills channel for maximum seal integrity. Diffuser is held in place with POM retaining latches. Stainless steel latches are recommended for the following applications: agriculture, car washes, food processing and swimming pools. Hole is 7/8" diameter and is provided with a plastic plug on one end for conduit attachment. Offset mounting pads which keeps luminaire level and slightly off of mounting surface are formed within the housing. Standard diffuser is high impact acrylic with textured pattern designed for high efficiency while providing reduced glare.




### FEATURES & BENEFITS


- Rigid one piece housing construction
- Standard 6-latch (IP65)
- En-seal™ gasketing provides superior resistance to moisture absorption versus conventional gasketing.
- Molded latch pockets compatible with standard and tamper-proof; latches in Celcon, stainless steel, and polycarbonate.
- Standard suitcase style latches
- Wet Location listed
- Standard housings available with one 7/8" conduit entry point on either or both ends.

### DIMENSIONS

#### SIDE VIEW



#### END VIEW

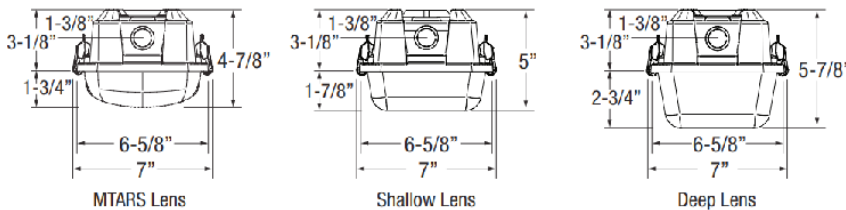

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: VT 2 LED 24 DMV AC 30 EM OS CS PC120

VT		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER	6. LENS	7. COLOR TEMP			
<b>VT</b>	<b>2</b> 2 ft	<b>LED</b>	<b>2 Ft</b>		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	<b>AC</b> Acrylic Crepe	<b>30</b>	3000K		
LED	<b>4</b> 4 ft		<b>24</b>	24W			2700 Lumens	<b>35</b>	3500K	
Vaportight	<b>8</b> 8 ft		<b>28</b>	28W			3300 Lumens	<b>40</b>	4000K	
			<b>35</b>	35W			4200 Lumens	<b>50</b>	5000K	
			<b>4 Ft</b>							
			<b>23</b>	23W			3160 Lumens			
			<b>35</b>	35W			4500 Lumens			
			<b>48</b>	48W			5570 Lumens			
			<b>57</b>	57W			6790 Lumens			
			<b>8 Ft</b>							
			<b>48</b>	48W			5570 Lumens			
			<b>70</b>	70W			9000 Lumens			
			<b>97</b>	97W			11140 Lumens			
			<b>114</b>	114W			13580 Lumens			

8. EM		9. SENSOR		10. CORD		11. PHOTOCELL	
<b>EM</b>	Emergency Battery Pack 10W ~ 1700 lumens	<b>OS</b>	Occupancy Sensor	<b>CS</b>	Cord 1/3 6"	<b>PC120</b>	Photocell 120V
<b>EM4F</b>	Emergency Battery Pack 4W ~450 Lumens	<b>OSW</b>	Occupancy Sensor - Wet Location	<b>OSW</b>	Occupancy Sensor - Wet Location	<b>PC277</b>	Photocell 277V
<b>EM7</b>	Emergency Battery Pack 7W ~ 1300 Lumens	<b>OSD</b>	Occupancy Sensor - 0-10V Dimmable	<b>OSD</b>	Occupancy Sensor - 0-10V Dimmable		
<b>EM5</b>	Emergency Battery Pack 5W ~ 850 Lumens	<b>SS</b>	Occupancy Sensor - Internal Microwave	<b>SS</b>	Occupancy Sensor - Internal Microwave		

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**ACCESSORIES**

Lumens are subject to a tolerance of ±10% and not relevant to RGB  
 Input wattage can vary depending on options  
 Dimensions and specifications subject to change without notice.

Dimensions and specifications subject to change without notice.

