



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Two fully adjustable ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing

ELECTRICAL

- Dual 120-277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (15W models)
- 6V/12V maintenance-free, rechargeable sealed lead acid battery (36W & 54W models)
- Offers 7.8Wh, 28.8Wh, and 46.8Wh of remote capacity (6V/12V DC output) standard on the 15W, 36W, and 54W models
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours. (36 hours on the 54W model)



MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount
- Suitable for wall mount


HOUSING

- Housing is reinforced polycarbonate construction in white, gray, or black finish
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws
- Knockouts provided for conduit feed applications

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries prorated for two (lead acid) / five (NiCd) years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- IP66 rated for ingress protection
- NEMA4X rated
- UL listed for wet locations (0°C-50°C on 15W and 10°C-40°C on 36W/54W models)

DIMENSIONS

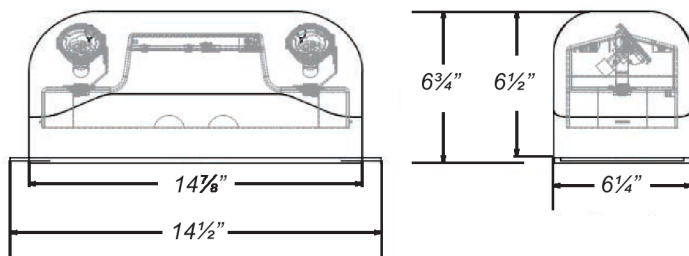

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: INDEMR16 6 15 B

INDEMR16

1. MODEL	2. BATTERY VOLTAGE	3. WATTAGE	4. HOUSING COLOR	5. DIAGNOSTICS (O) ¹	6. WEATHER (O) ¹
INDEMR16	6 6 Volt 12 12 Volt	15 15 Watts 36 36 Watts 54 54 Watts	W White B Black	SDT Self-Diagnostics	CW Cold Weather ²
7. TAMPERING (O)¹					
TP Tamper-Proof					

Notes:

¹(O) is optional

²Available only in 15W models

Dimensions and specifications subject to change without notice.

