

JOB NAME:
CAT#:
TYPE:

ILLUMINATION

- Two fully adjustable 5.4 watt, glare-free incandescent lamp heads
- High performance reflector and tempered glass lens for optimal light distribution
- Ultra bright, energy efficient, long life red or green LED exit sign illumination

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting hardware provided for back surface wall mount


HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish
- High-impact resistant, UV stabilized polycarbonate clear lens
- Corrosion-resistant enclosure engineering grade silicone gasket
- Knockouts provided for conduit feed applications
- EZ snap-out chevron firectional indicators

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)

DIMENSIONS

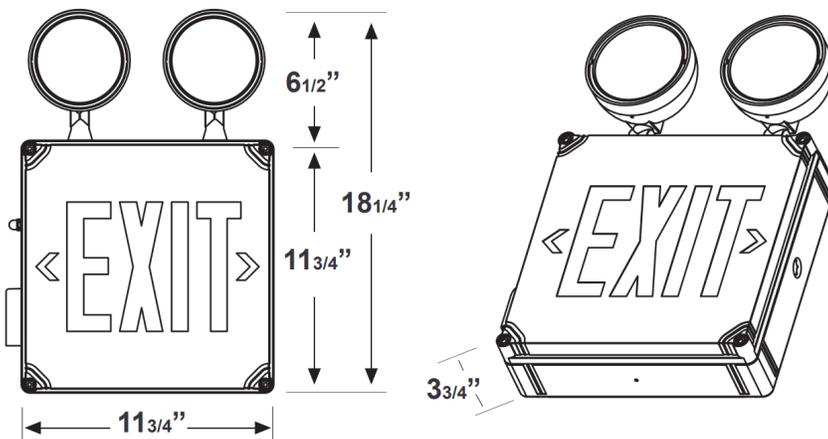

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: CWLXTE 1 R W EM

CWLXTE

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. BATTERY	5. HEATER (O) ¹
CWLXTE	(blank) Single Face	R Red G Green	EM Battery Backup	HTR Internal Heater

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

