

JOB NAME:
CAT#:
TYPE:

ILLUMINATION

- Adjustable, long lasting, efficient, ultra bright white LED lamp heads
- One, 0.5 watt white LED per lamp head
- Unique all-inclusive lamp, reflector, and lens assembly

ELECTRICAL

- Universal 120-277 voltage standard. Optional dual 120/230 voltage available
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- Universal knockout pattern on back plate for surface mount
- Suitable for wall or ceiling mount


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in white or black finish

WARRANTY/LISTING

- One year warranty on all electronics and housing. Battery prorated for one year
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-40°C)
- Certified to CEC under Title 20 regulations

DIMENSIONS

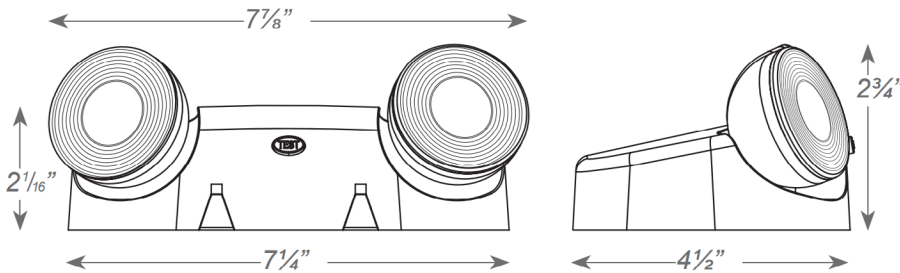

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: E-1 B RC

E-1

1. MODEL	2. HOUSING COLOR	3. REMOTE CAPACITY (O) ¹	4. VOLTAGE (O) ¹
E-1	(blank) White B Black	RC Remote Capacity	SPV 120/230 Volt 50/60Hz

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

