



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

HOUSING


- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes)
- Field selectable knockout chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)
- Certified to CEC under Title 20 regulations



DIMENSIONS

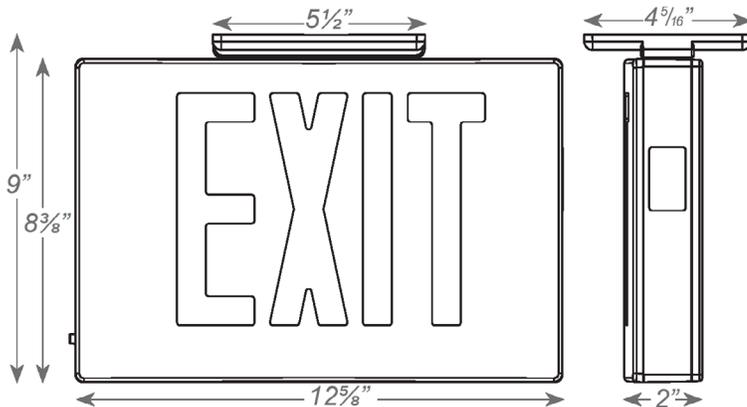

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: KXTEU 1 R W W EM TP

KXTEU

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. HOUSING COLOR	5. FACE PANEL	6. BATTERY
KXTEU	1	Single Face	R Red	W White	(blank) AC-Only
	2	Double Face	G Green	B Black	EM Battery Backup
	3	Universal/ Single/Double Face		A Aluminum	

7. DIAGNOSTICS (O) ¹	8. CIRCUITING (O) ¹	9. TAMPERING (O) ¹
SDT Self-Diagnostics ²	2C Dual Circuit Operation ³	TP Tamper-proof

Notes:

¹(O) is optional

²Available only with EM units

³Available only with AC units

Dimensions and specifications subject to change without notice.

