



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Two fixed 5.4 watt glare-free lamp heads
- Smooth thermoplastic reflector and plastic lens

ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- Universal knockout pattern on back plate for surface mount snaps into place making internal electrical connections


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 2 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- ETL listed for damp locations (20°C-50°C)

DIMENSIONS

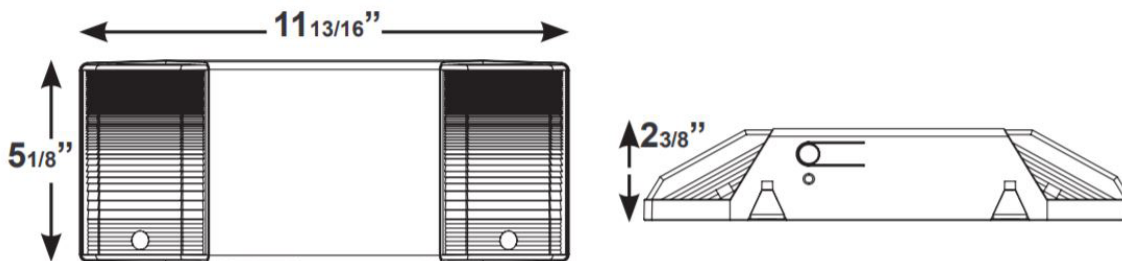

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: R-2

R-2

1. MODEL	2. HOUSING COLOR
R-2	(blank) White B Black

Dimensions and specifications subject to change without notice.

