



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- Double face utilizes factory installed silver or white mylar background panel

ELECTRICAL

- Dual 120/277 voltage standard
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included
- Wall mount capability


HOUSING

- Premium-grade, extruded aluminum housing
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in optional black or white powder-coated finishes.
- Self-adhesive chevron appliques and guide template provided for directional indication

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)
- Certified to CEC under Title 20 regulations

DIMENSIONS

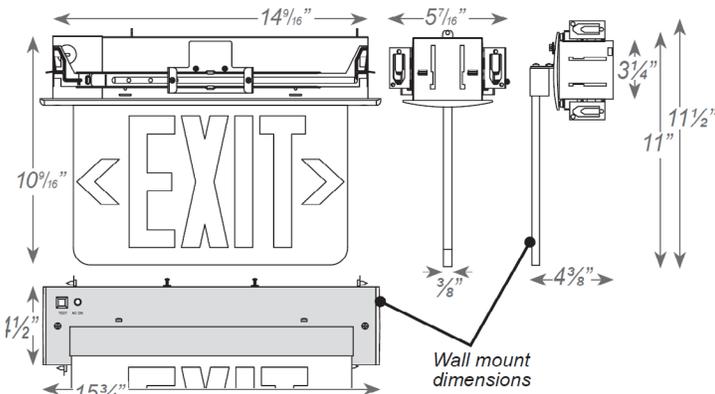

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RELZXTE 2 R W W

RELZXTE

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. PANEL	5. TRIM PLATE	6. BATTERY
RELZXTE	1 Single Face 2 Double Face	R Red G Green	C Clear ¹ M Mirror W White	W White B Black A Aluminum	(blank) AC Only EM Battery Backup

7. MOUNTING (O) ²	8. DIAGNOSTICS (O) ²	9. CIRCUITING (O) ²	10. VOLTAGE (O) ²	11. WORDING (O) ²
WM Wall Mount ¹	SDT Self-Diagnostics ³	2C-120 Dual Circuit With 120V Input ⁴ 2C-277 Dual Circuit With 277V Input ⁴	SPV 208/220/240 Volt, 50/60Hz ⁵	CUSTOM Custom Wording

Notes:

¹With single face only

²(O) is optional

³Available only with EM units

⁴Available only with AC units

⁵Not available with SDT

Dimensions and specifications subject to change without notice.

