


Series DXR

Remote Capable Incandescent Emergency Unit

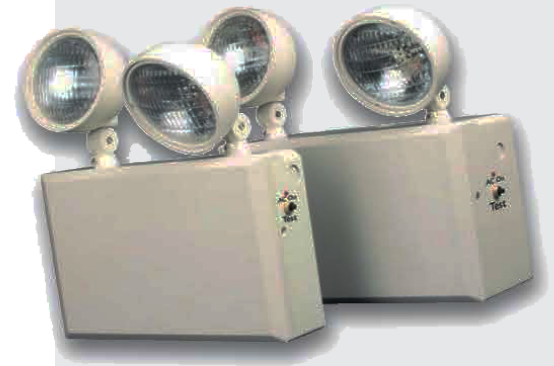

ILLUMINATION

- Adjustable glare-free PAR-Type lamp heads with 7.2W (on 6V models) and 9/12W (on 12V models) incandescent lamps.

ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.

MOUNTING

- Knockouts on the back for wall mount,.
- Side and top knockouts for conduit feed applications.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant high-impact thermoplastic construction.

WARRANTY

- Five year warranty on all electronics and housing, Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for dry locations (25°C)

DIMENSIONS

50W-12 3/4"L x 3 1/4"W x 14 13/16"H

100W-12 3/4"L x 5"W x 14 13/16"H

FEATURES & BENEFITS

- HTR:Optional internal heater for cold temperature applications
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in th USA" under the Buy American Act
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

STANDARD | OPTIONAL




ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	VOLTAGE	CAPACITY	OPTIONS
DXR	6 6 Volts	5 50 Watt	HTR Internal Heater1
	12 12 Volts	10 100 Watt	20SB 12V20W Sealed Beam Halogen2 USA Assembled in USA

DRAWINGS & IMAGES

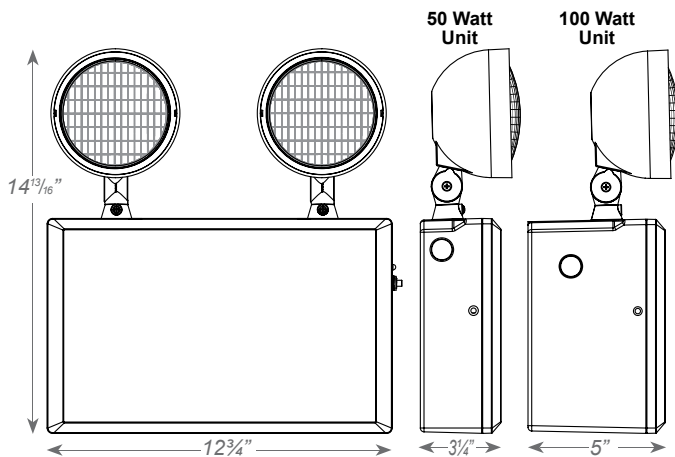

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.



CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series DXR

Remote Capable Incandescent
Emergency Unit

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
DXR-65	15.1	17.7	0.142	0.068
DXR-610	20.5	21.1	0.189	0.089
DXR-125	19.6	23.4	0.178	0.093
DXR-1210	29.3	33.5	0.273	0.131

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
DXR-65	6V	35.6W			X	X	X		X		X		X		X
DXR-610	6V	85.6W			X	X	X		X		X		X		X
DXR-125	12V	32W			X	X		X		X		X		X	
DXR-1210	12V	76W			X	X		X		X		X		X	
DXR-125-20SB	12V	10W			X	X		X		X		X		X	
DXR-1210-20SB	12V	60W			X	X		X		X		X		X	

MODEL #	WATTS for 1.5 hrs	VOLTAGE	TOTAL CONNECTED HEADS/FIXTURES		
			4 hrs.	2 hrs.	1.5 hrs.
DXR-65	50	6	2*	4*	6*
DXR-610	100	6	4*	9*	12*
DXR-125	50	12	2**	3**	5**
DXR-1210	100	12	4**	7**	10**

*Based on 7.2 watt lamps, standard **Based on 9 watt lamps, standard