

# Series INDEMR16

## LED NEMA4X/NSF



### ILLUMINATION

- Two fully adjustable, ultra-bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

### ELECTRICAL

- Dual 120-277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery)
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 6V/12V maintenance-free, rechargeable NiCd battery (15W models).
- 6V/12V maintenance-free, rechargeable sealed lead acid battery (36W and 54W models).
- Offers 7.8W, 28.8W, 46.8W of remote capacity (6V/12V DC output) standard on the 15W, 36W and 54W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Suitable for wall mount.

### HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications


### DIMENSIONS

14 1/2"L x 6 1/4"W x 6 3/4"H

### FEATURES & BENEFITS

- SDT: Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meets electrical and life safety codes
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-25°C - 50°C)
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes
- IP66 rated for ingress protection
- NEMA4X rated
- UL certified for use in food service operations
- UL Listed for wet locations (0°C - 50°C on 15W and 10°C - 40°C on 36W/54W models)
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

#### STANDARD



#### OPTIONAL




### ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	BATTERY VOLTAGE	WATTAGE	HOUSING COLOR	OPTIONS
INDEMR16	6 6 Volt	15 15 Watts	W White	SDT Self-Diagnostics
	12 12 Volt	36 36 Watts	B Black	CW Cold Weather <sup>1</sup>
		54 54 Watts		TP Tamper-proof

Note:  
<sup>1</sup> Available only in 15W models

### DRAWINGS & IMAGES

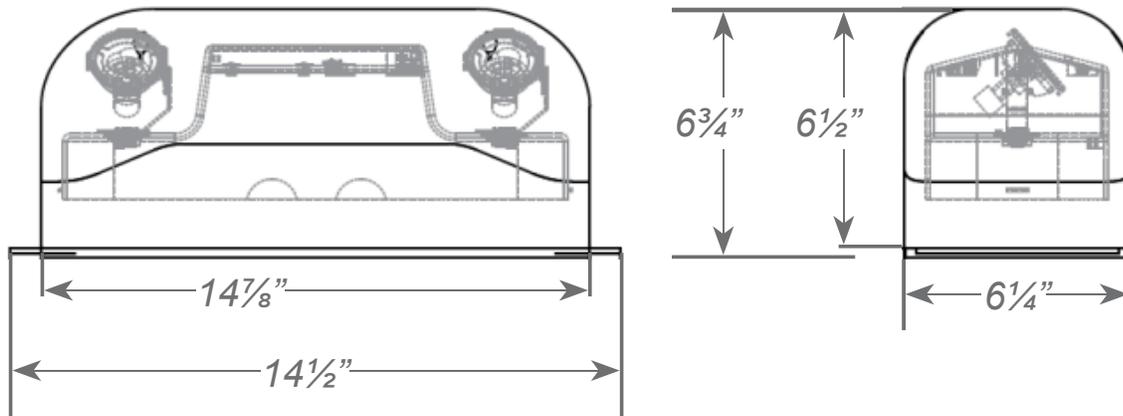

Note:  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.