

Series TFX2

Wet Location Incandescent Emergency Unit

ILLUMINATION

- Sealed and gasketed weather proof lamp heads with tempered glass lenses
- 7.2W incandescent wedge base lamps

ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 15W available as an option

MOUNTING

- External mounting brackets for simplified wall mounting provided

HOUSING

- Corrosion-resistant 5VA flame retardant, UV-stabilized polycarbonate in gray finish
- Sealed and gasketed housing with hinged cover
- Sealed test switch
- Integral breather vent

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	OPTIONS	
TFX2	HTR	Internal Heater
	RC	Remote Capable




DIMENSIONS

9 11/16"L x 6"W x 12 7/8"H

FEATURES & BENEFITS


- HTR: Optional heater for cold temperature applications
- Five year warranty on all electronics and housing. Batteries pro-rated warranted for 2 years
- UL Listed for wet locations (5°C - 40°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

STANDARD



OPTIONAL

DRAWINGS & IMAGES

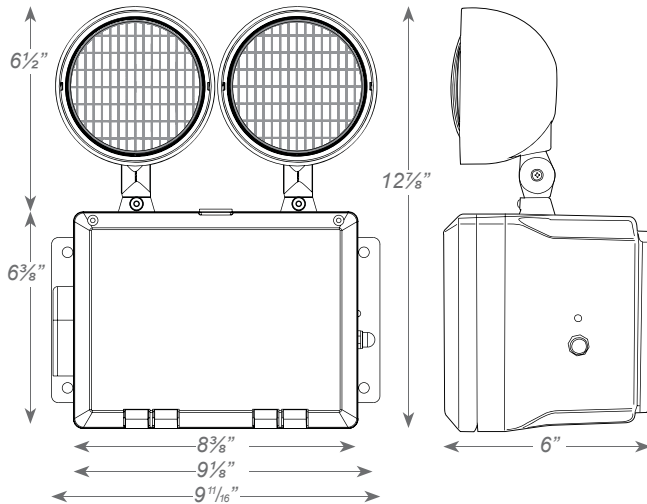

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
TFX-2	8.5	10.0	0.073	0.040

CENTER-TO-CENTER SPACING GUIDELINES

For reference only.



1	0.08	0.09	0.10	0.10	0.17	0.21	0.23	0.28	0.37	0.32	0.43	0.39	0.47	0.32	0.34	0.30	0.21	0.19	0.19	0.09	0.08	0.08	0.08	0.06	
2	0.07	0.08	0.09	0.11	0.16	0.22	0.24	0.30	0.42	0.39	0.55	0.45	0.51	0.37	0.39	0.37	0.20	0.20	0.20	0.12	0.10	0.10	0.08	0.07	
3	0.07	0.08	0.10	0.12	0.14	0.30	0.39	0.74	0.89	0.77	0.74	0.59	0.56	0.45	0.42	0.41	0.18	0.16	0.16	0.12	0.06	0.05	0.05	0.05	
4	0.07	0.08	0.09	0.13	0.23	0.42	0.50	0.89	1.30	1.45	1.68	1.56	1.30	1.10	0.86	0.57	0.14	0.14	0.13	0.11	0.08	0.06	0.05	0.05	
5	0.07	0.10	0.12	0.18	0.30	0.40	0.85	1.49	1.81	1.94	2.00	1.77	1.69	1.35	1.06	0.68	0.41	0.15	0.12	0.12	0.08	0.05	0.04	0.03	
6	0.05	0.07	0.11	0.15	0.22	0.31	0.60	1.30	1.53	1.69	1.74	1.72	1.66	1.38	1.10	0.65	0.45	0.18	0.14	0.12	0.10	0.07	0.04	0.04	
	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12

Meets NFPA 101 Requirements for: 14' center-to-center spacing - 3' path of egress 3' from the wall- 7 1/2' mounting height.

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
TFX-2-RC	6V	15W			X	X	X		X		X		X		X

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.