



CATALOG#:

PROJECT:

TYPE:

Series LPC

LED Surface Mount Lowest Profile Cloud Fixture

A 3.2 deep, contemporary, opal acrylic diffuser, softly and evenly distributes light and creates a subtle "cloud" effect on the ceiling. Ideal for modern, upscale, dry or damp applications.

CONSTRUCTION

All metal parts that are die-formed from heavy gauge, cold-roll steel. The housing is spot-welded to insure uniformity and dimensional stability.

DIFFUSER

Custom-compounded, frosted acrylic sheet of .110" thickness provides smooth, general lighting for LED arrays with no pixelation. An impact modifier added to the acrylic enhances its durability.

MOUNT

Surface mount

DIMENSIONS

24L - 26.75"L x 9.24"W x 3.2"H

48L - 49.75"L x 9.25"W x 3.2"H

FEATURES & BENEFITS

- A puff of light to illuminate the most discriminating office or home
- A shallow contemporary opal acrylic diffuser softly and evenly distributes light at comfortable levels
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120 ELV/TRIAC optional
- Power factor >0.90
- Suitable for dry and damp locations
- 5 year warranty





CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series LPC

LED Surface Mount Lowest Profile Cloud Fixture

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.



Item No.	Description
LPCMW24LS20W2250LDMV40K	24"L x 11"W x 3"H / Matte White Lens / 20W, 2250L /0-10V Dim / 4000K
LPCMW24LS20W2250LG12040K*	24"L x 11"W x 3"H / Matte White Lens / 20W, 2250L /0-10V Dim / 4000K
LPCMW24LS24W2600LDMV40K	24"L x 11"W x 3"H / Matte White Lens / 24W, 2600L /0-10V Dim / 4000K
LPCMW24LS28W3000LDMV40K	24"L x 11"W x 3"H / Matte White Lens / 28W, 3000L /0-10V Dim / 4000K
LPCMW48LS40W4550LDMV40K	48"L x 11"W x 3"H / Matte White Lens / 40W, 4550L /0-10V Dim / 4000K
LPCMW48LS40W4550LG12040K*	48"L x 11"W x 3"H / Matte White Lens / 40W, 4550L /0-10V Dim / 4000K
LPCMW48LS48W5200LDMV40K	48"L x 11"W x 3"H / Matte White Lens / 48W, 5200L /0-10V Dim / 4000K
LPCMW48LS57W6050LDMV40K	48"L x 11"W x 3"H / Matte White Lens / 57W, 6050L /0-10V Dim / 4000K

DRAWINGS & IMAGES


Back

End

2 Ft

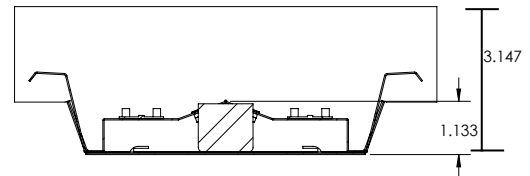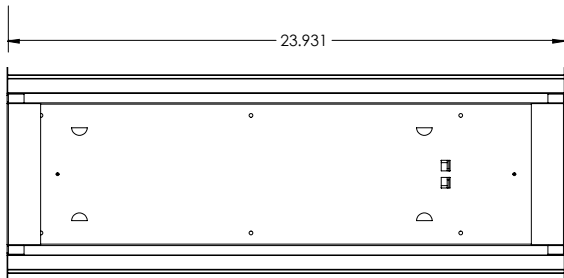

4 Ft

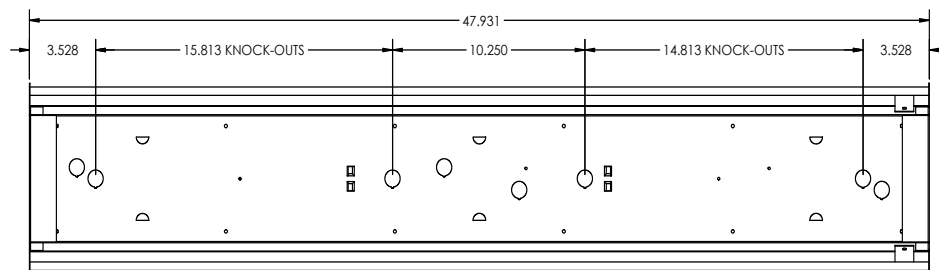

Note:
 *Programmable LED drivers allow custom configured wattages and corresponding lumens.
 ** Consult factory for 90 CRI 5000K availability.
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.