



JOB NAME:

CAT#:

TYPE:

APPLICATIONS



Commercial grade shallow surface mounted vandal resistant fluorescent fixture. For use in high abuse indoor applications such as schools and public buildings and any area where security is the primary consideration. Housing is die-formed 20 gauge cold rolled steel. Finish is high reflectance baked white enamel. Injection molded, thick walled, clear prismatic diffuser is manufactured from high impact UV treated polycarbonate. Diffuser is held in place and secured with tamper-proof stainless steel screws. Mounts over electrical junction box. Mounting holes are provided. Listed by and bears UL label.



FEATURES & BENEFITS

- The ultimate in vandal resistant enclosed security fixtures
- Virtually indestructible UV stabilized lens is .177" clear polycarbonate
- Lens has a pyramidal prism design on bottom and vertical perimeter rib for maximum light control and efficiency
- Available in lengths from 24 to 48 inches - (2', 4' lengths)
- Fully gasketed to provide protection against dust, dirt, insects, moisture and other foreign dust particles
- Tamperproof screws are standard
- Every fixture individually tested
- UL Listed for damp location

DRAWINGS & DIMENSION

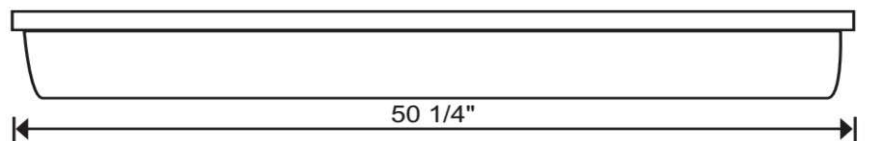

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: SVP 2328 DT EM

SVP

1. SERIES	2. LAMP COUNT	3. LAMP SIZE	4. BALLAST & TANDEM CODE	5. VOLTAGE	6. OPTIONS
SVP	2	32 48" 32W T8	Blank 48" 32W T8	DT Multivolt (120-277)	WP 6ft 3 wire 18 gauge whip
			8 2x 48" 32W T8 8 ft tandem		WP10 6ft 4 wire 18 gauge whip
					EM Emergency ballast 500 lumens
					EM14 Emergency ballast 1400 lumens
					PI1 Included wire harness, 3 wire

Dimensions and specifications subject to change without notice.