

Strip Lighting

2600 to 9600 Lumens
5 year limited warranty

20W, 33W, 50W
3000K, 4000K, 5000K



WATTAGE: 20W, 33W, 73W

COLOR TEMPERATURE: 3000, 4000, 5000K

COLOR RENDERING INDEX CRI: >80

WARRANTY: 5 Year Limited Warranty



Look for this logo to denote that your fixture or retrofit kit has an industry leading LED T8 Lamp backed by a fifty year old company with hallmarks on reliability, consistency and performance. If you see this mark, rest assured your lights will operate to specifications every time or we will be there to make it right.

PRODUCT FEATURES

- Housing made of high quality steel with high reflectance paint providing high lumen output
- Suitable for use in -20°C to +40°C
- Polyester powder white finish, multi-stage process produces a 3mil thickness for superior corrosion and maximum environmental durability
- Precision and high reflectance lens producing superior uniformity
- UL and cUL Listed

See www.savegreenlighting.com/products for more features.

With it's slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.

ELECTRICAL CHARACTERISTICS

- 120-277V standard,
- Class 2 constant current drivers with 90% power factor
- Dimming 0-10V driver standard

PHOTOMETRIC CHARACTERISTICS

- Color Temperature (CCT): 3000K, 4000K, 5000K
- Color Rendering Index (CRI): >80

WARRANTY


5 Year Limited warranty

For more information on warranty, see <https://www.savegreenlighting.com/wp-content/uploads/2018/03/SG-warranty.pdf>



ORDERING GUIDE: GSR48L33MDVMCT


SERIES	LENGTH	WATTAGE-LUMENS	DRIVER	COLOR TEMP	OPTIONS
GSR	24L 24"	20W 2600 Lumens	DMV 0-10V Dimming	MCT 3000K, 4000K, 5000K selectable via 3 position switch	EM14 14W Emergency battery backup
	48L 48"	33M 4400M Lumens 22M 2700M Lumens 45W 5700M Lumens Selectable via 3 position switch			
	96L 96"	50M 6800M Lumens 33M 4100M Lumens 69W 8600M Lumens Selectable via 3 position switch			
ACCESSORIES					
					HC101 20' Chain Kit with S hooks

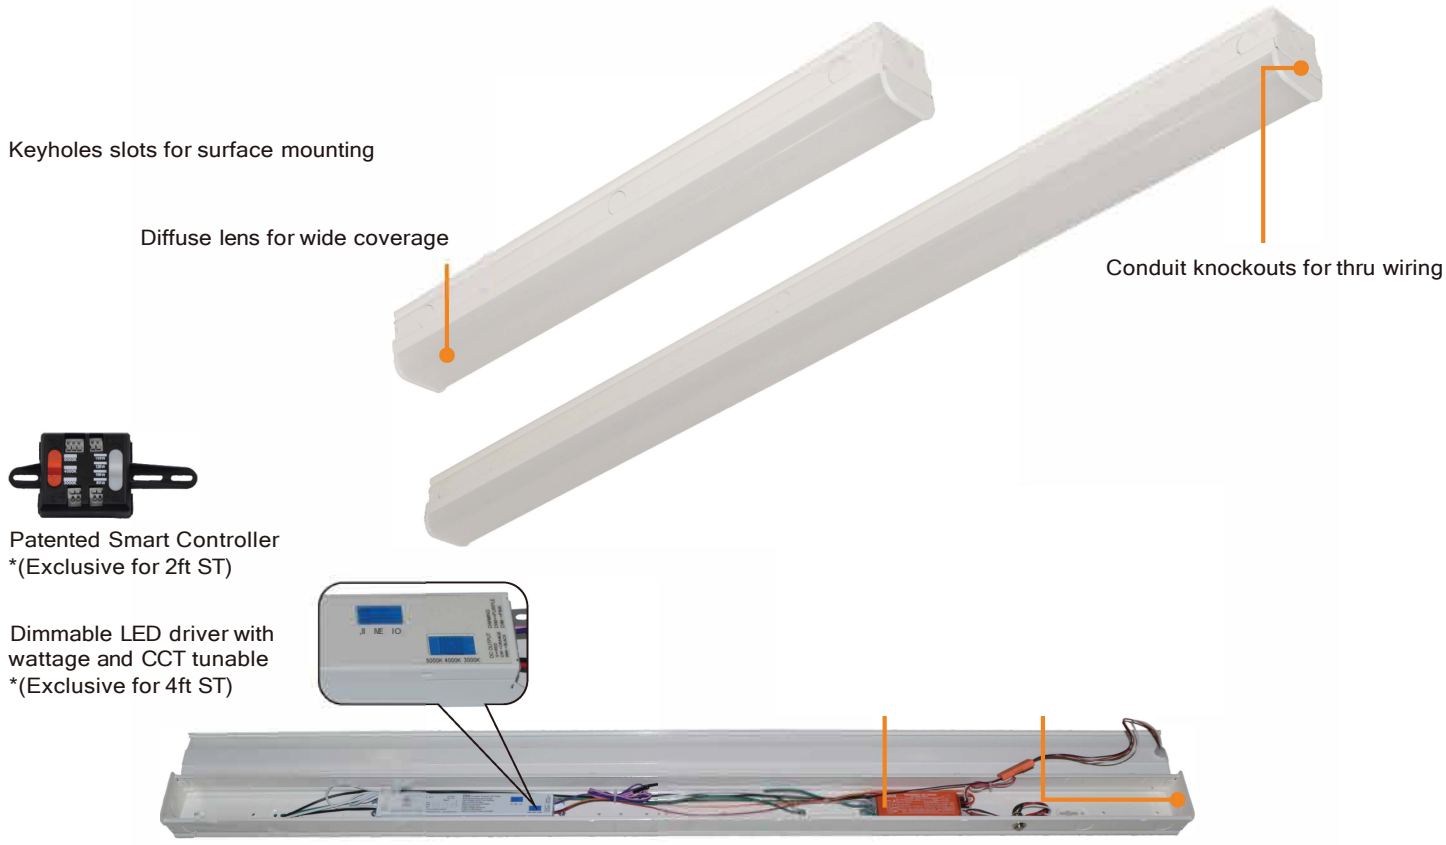

ADDITIONAL MOUNTING ACCESSORIES










Quickie Connector

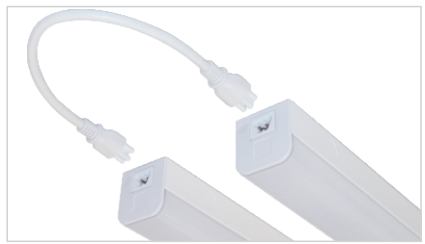


Quickie Cable

The Quickie connection system uses the latest in toolless technology to easily and seamlessly connect up to 44' of fixtures. The Quickie connector provides a line voltage and 0-10V dimming connection between fixtures. The Quickie cable comes in lengths (18 inches)_ and allows for angled and distant fixture connection. The Quickie sensor integrates with a single fixture or an entire row for occupancy sensing and dimming.

DRAWINGS & PHOTOS

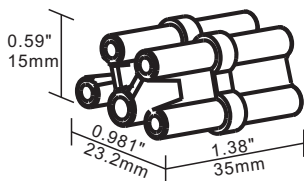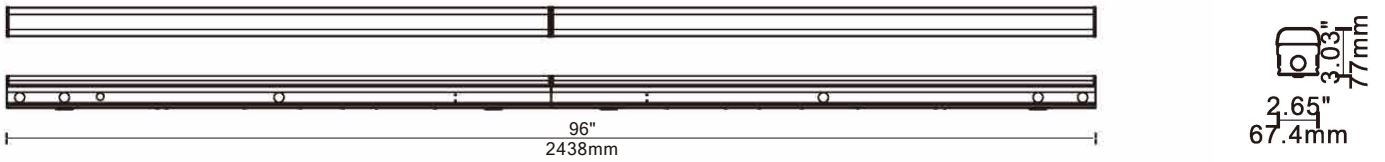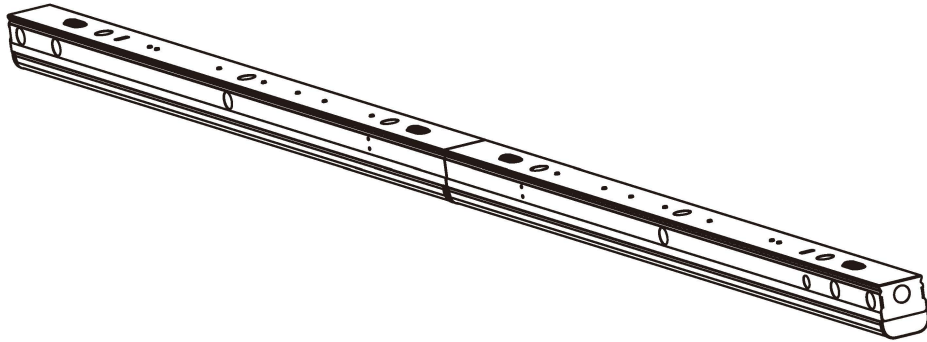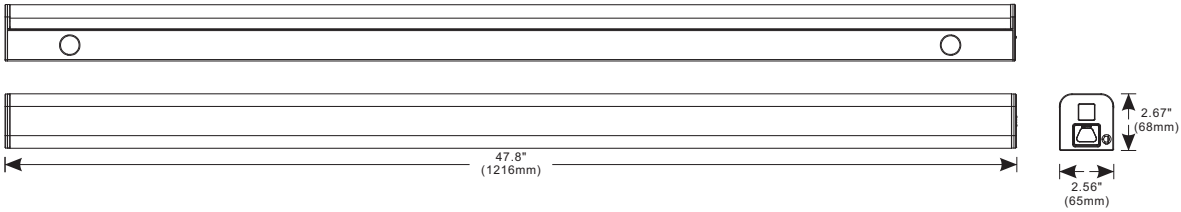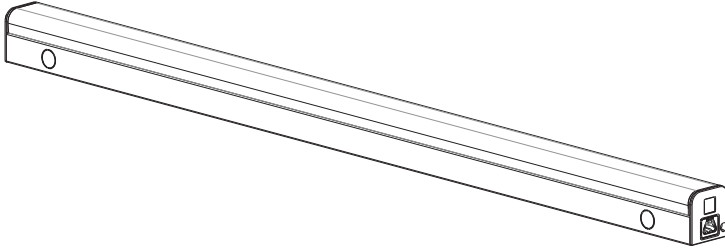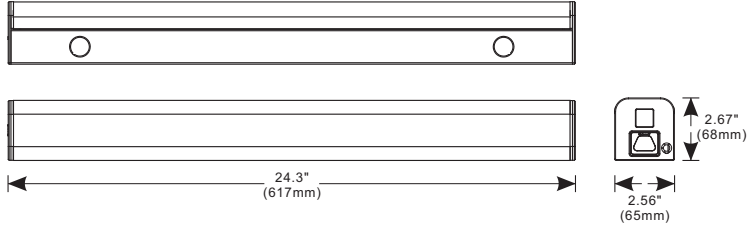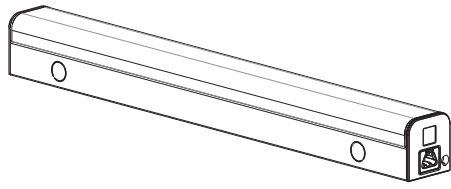

QUICKIE CONNECTOR

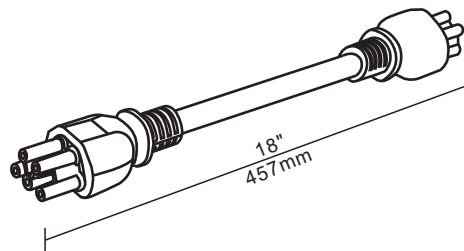

QUICKIE CABLE