

# Strip Lighting

## 2600 to 8600 Lumens

### 5 year limited warranty

20W, 33W, 50W  
3000K, 4000K, 5000K



**WATTAGE:** 20W, 33W, 73W

**COLOR TEMPERATURE:** 3000, 4000, 5000K

**COLOR RENDERING INDEX CRI:** >80

**WARRANTY:** 5 Year Limited Warranty

#### PRODUCT FEATURES

- With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.
- It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.

#### ELECTRICAL CHARACTERISTICS

- 120-277V standard,
- Class 2 constant current drivers with 90% power factor
- Dimming 0-10V driver standard
- Occupancy sensor optional

#### PHOTOMETRIC CHARACTERISTICS

- Color Temperature (CCT): 3000K, 3500K, 4000K 5000K
- Color Rendering Index (CRI): >80


See [www.savegreenlighting.com/products](http://www.savegreenlighting.com/products) for more features.

**WARRANTY**  
5 Year Limited warranty



#### ORDERING GUIDE: GSR48L33M4400MDMVMCT


SERIES	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR TEMP	OPTIONS
GSR	24L 24"	20W2600L 20W 2600 Lumens	DMV 0-10V Dimming	MCT 3000K, 4000K, 5000K selectable via 3 position switch	EM14 14W Emergency battery backup
	48L 48"	33M4400M 22W 2700 Lumens 33W 4400 Lumens 45W 5700 Lumens Selectable via 3 position switch			
	96L 96"	50M6800M 33W 4100 Lumens 50W 6800 Lumens 69W 8600 Lumens Selectable via 3 position switch			
					<b>ACCESSORIES</b> HC101 20' Chain Kit with S hooks

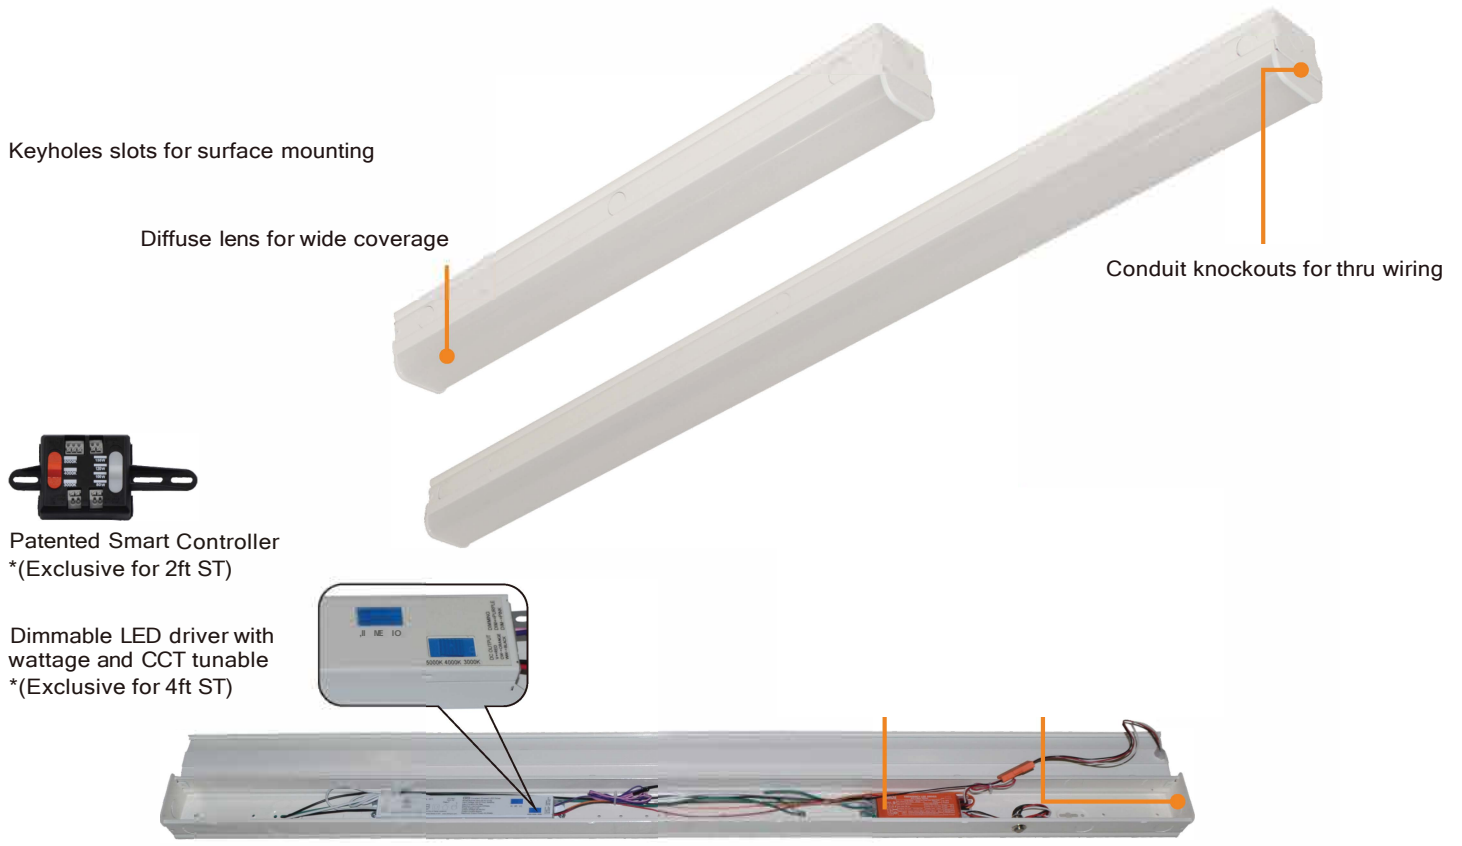

**ADDITIONAL MOUNTING ACCESSORIES**










Quickie Connector

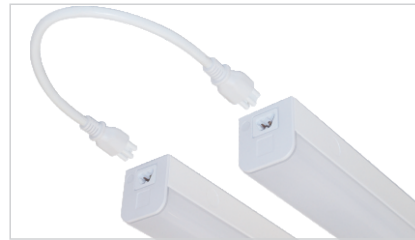


Quickie Cable

The Quickie connection system uses the latest in toolless technology to easily and seamlessly connect up to 44' of fixtures. The Quickie connector provides a line voltage and 0-10V dimming connection between fixtures. The Quickie cable comes in lengths (18 inches)\_ and allows for angled and distant fixture connection. The Quickie sensor integrates with a single fixture or an entire row for occupancy sensing and dimming.

**DRAWINGS & PHOTOS**

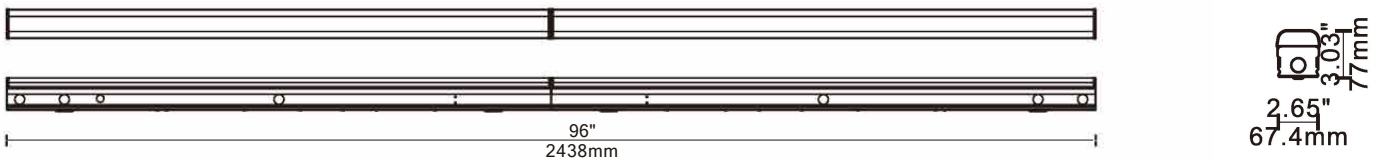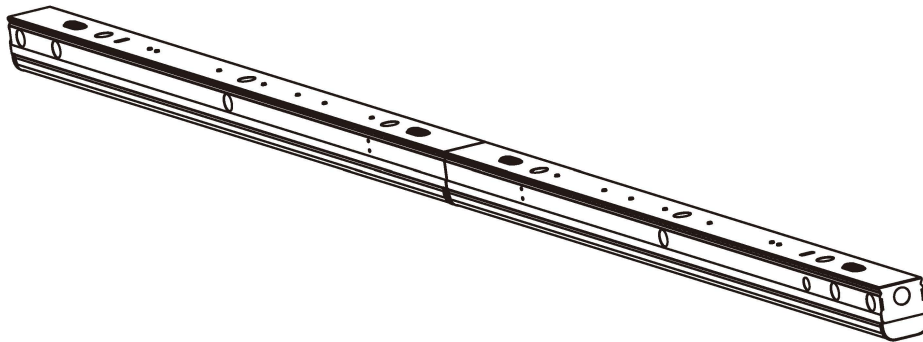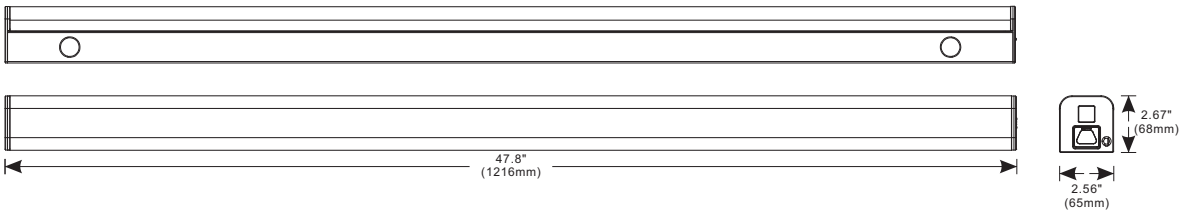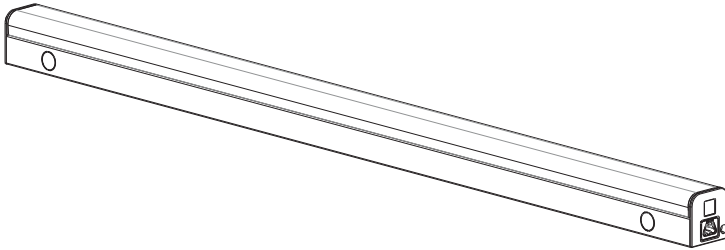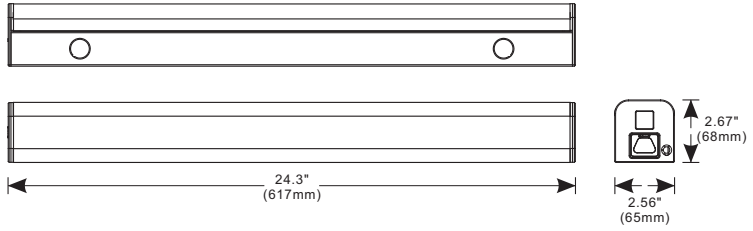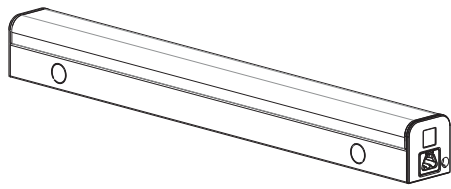

**QUICKIE CONNECTOR**

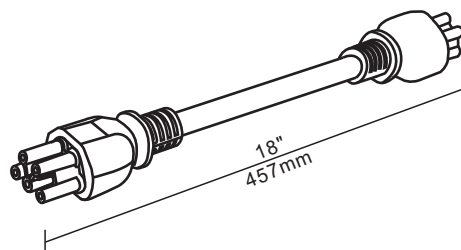

**QUICKIE CABLE**