

Strip Lighting

2600 to 8600 Lumens

5 year limited warranty

20W, 33W, 50W
3000K, 4000K, 5000K



WATTAGE: 20W, 33W, 73W

COLOR TEMPERATURE: 3000, 4000, 5000K

COLOR RENDERING INDEX CRI: >80

WARRANTY: 5 Year Limited Warranty



Look for this logo to denote that your fixture or retrofit kit has an industry leading LED T8 Lamp backed by a fifty year old company with hallmarks on reliability, consistency and performance. If you see this mark, rest assured your lights will operate to specifications every time or we will be there to make it right.

PRODUCT FEATURES

- 8' length ships in 4' packaging and seamlessly connects for 8' strip
- Housing made of high quality steel with high reflectance paint providing high lumen output
- Suitable for use in -20°C to +40°C
- Polyester powder white finish, multi-stage process produces a 3mil thickness for superior corrosion and maximum environmental durability
- Precision and high reflectance lens producing superior uniformity
- Occupancy sensor (PIR) optional
- L70 > 50,000 Hours
- UL and cUL Listed

WARRANTY

5 Year Limited warranty

For more information on warranty, see <https://www.savegreenlighting.com/wp-content/uploads/2018/03/SG-warranty.pdf>

With it's slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.

ELECTRICAL CHARACTERISTICS

- 120-277V standard,
- Class 2 constant current drivers with 90% power factor
- Dimming 0-10V driver standard

PHOTOMETRIC CHARACTERISTICS

- Color Temperature (CCT): 3000K, 4000K, 5000K
- Color Rendering Index (CRI): >80



ORDERING GUIDE: GSR48L33M4400MDMVMCT

SERIES	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR TEMP	OPTIONS
GSR	24L 24"	20W2600L 20W 2600 Lumens	DMV 0-10V Dimming	MCT 3000K, 4000K, 5000K selectable via 3 position switch	EM14 14W Emergency battery backup
	48L 48"	33M4400M 22W 2700 Lumens 33W 4400 Lumens 45W 5700 Lumens Selectable via 3 position switch			
	96L 96"	50M6800M 33W 4100 Lumens 50W 6800 Lumens 69W 8600 Lumens Selectable via 3 position switch			
ACCESSORIES HC101 20' Chain Kit with S hooks					

Keyholes slots for surface mounting


Diffuse lens for wide coverage

Conduit knockouts for thru wiring






Patented Smart Controller
*(Exclusive for 2ft ST)

Dimmable LED driver with
wattage and CCT tunable
*(Exclusive for 4ft ST)

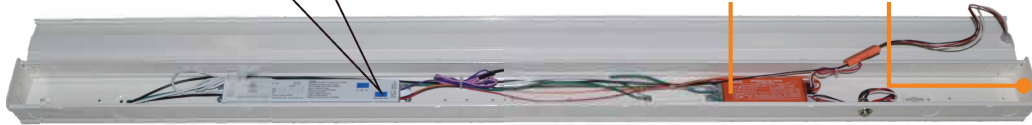

DRAWINGS & PHOTOS



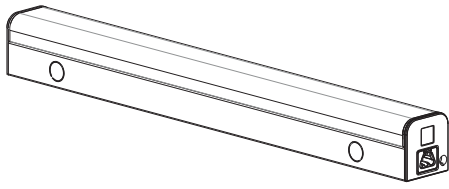


24.3"
(617mm)



2.67"
(68mm)

2.56"
(65mm)

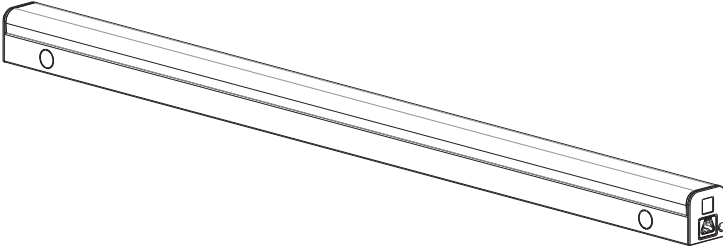


47.8"
(1216mm)



2.67"
(68mm)

2.56"
(65mm)

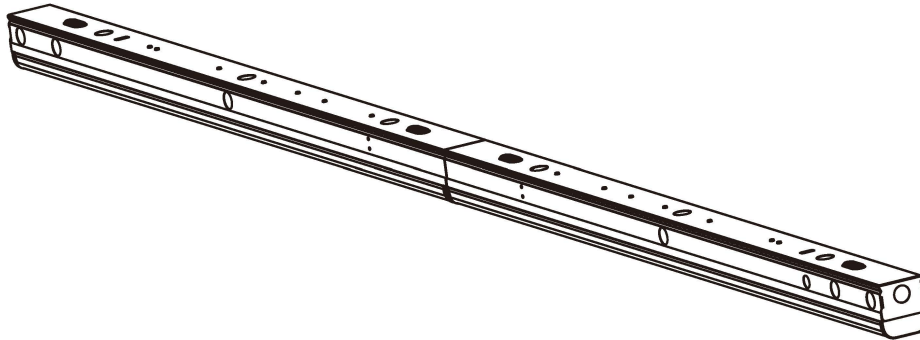

96"
2438mm



2.65"
67.4mm