



JOB NAME: CAT#: TYPE:

APPLICATIONS

Side mounted LED strip fixtures. For use in indoor applications with restricted space, where shallow design, high performance and ease of installation are required. Designed for cove, valance and display lighting.


Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end caps may be butted together for continuous row mounting. Snap-on ballast covers for simple installation and maintenance. Single wireway cover. Knockouts are provided for flexible conduit attachment. Listed by and bears ${}_{\rm C}{\rm ETL}_{\rm US}$ label.



FEATURES & BENEFITS

- Side mounted LEDs
- · Snap together design
- Low profile housing
- Available in 2' or 4' lengths
- · Single sided or double sided units available
- · Single or continuous row mounting capability
- · Steel housing and ends with white enamel finish
- ETL_{IIIs} listed for damp location

DIMENSIONS

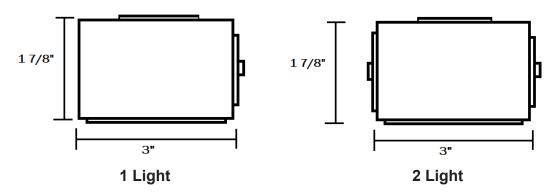









42SC LEDSidecut Channel

JOB NAME: CAT#: TYPE:

ORDERING

EXAMPLE: 42SC 18 LED 1S 12 DMV

42SC		LED				_	
1. SERIES	2. LENGTH	3. GEAR	4. SIDE LIGHT	5. WATTAGE		6. DRIVER	
42SC	24 24" 48 48"	LED	1S 1 side lit 2S 2 side lit		24" 12 Watts 18 Watts 24 Watts 35 Watts	DMV MV	120-277V Multivolt 0-10V Dimmable Multivolt 120-277VAC
				36	48" 12 Watts 24 Watts 36 Watts 7 67 Watts		

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





