



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Economically designed narrow wraparound provides reliable and efficient lighting. Ideal for use in indoor applications such as homes, modular homes, mobile homes, stores and public building where low glare and ease of installation is required.


Housing and ends are die-formed and embossed from cold rolled steel. Inspection knockouts provided for mounting to junction box. Driver cover snaps into place eliminating the need for tools when accessing. Diffuser hinges from either side in a lift and shift manner and is self-centering. End caps may be butted together for continuous row mounting. Knockouts are provided for stem mounting.



FEATURES & BENEFITS

- Min CRI 82
- Corrosion and scratch resistant
- Nominal 9" width with a shallow design
- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in lengths from 24 to 48 inches - (2' & 4' lengths)
- Single or continuous row mounting capability
- Surface, stem or chain mountable
- ETL Listed for damp location

DIMENSIONS

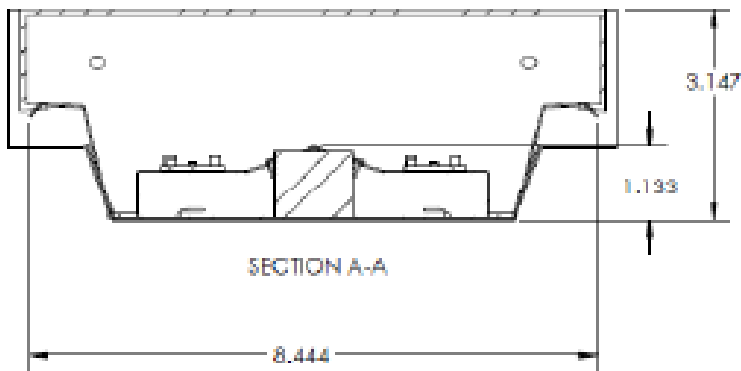

DLC Listed	
770-48LED23DMVxx	xx=30,35,40,50
770-48LED35DMVxx	xx=30,35,40,50
770-48LED48DMVxx	xx=30,35,40,50
770-48LED56DMVxx	xx=30,35,40,50





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 770 24 LED 12 DMV 30 EM WP

770		LED									
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		7. COLOR TEMP		
770	24	24"	LED	<u>24"</u>		DMV	120-277V Multivolt 0-10V Dimmable	(Blank)	Clear Prismatic Frosted	30	3000K
	48	48"		15	15 Watts 3135 Lumens					35	3500K
			20	20 Watts 3135 Lumens	SDMV	Step dimming Multivolt			40	4000K	
			25	25 Watts 3465 Lumens	DHV	347-480VAC 0-10V Dimming			50	5000K	
			33	33 Watts 3630 Lumens	D347V	347VAC 0-10V Dimming					
				<u>48"</u>	D120	Triac Dimming 120VAC					
			15	15 Watts 1950 Lumens	D277	Triac Dimming 277VAC					
			20	20 Watts 2600 Lumens							
			25	25 Watts 3250 Lumens							
			30	30 Watts 3900 Lumens							
			35	35 Watts 4550 Lumens							
			40	40 Watts 5200 Lumens							
			45	45 Watts 5850 Lumens							
			50	50 Watts 6500 Lumens							
			54	54 Watts 7020 Lumens							
				<u>96"</u>							
			30	30 Watts 3900 Lumens							
			40	40 Watts 5200 Lumens							
			50	50 Watts 6500 Lumens							
			60	60 Watts 7800 Lumens							
			70	70 Watts 9100 Lumens							
			80	80 Watts 10400 Lumens							
			90	90 Watts 11700 Lumens							
			100	100 Watts 13000 Lumens							
			108	108 Watts 14040 Lumens							

9. EM		10. CORD	
EM	10W ~1200 Lumen Battery backup	WP	6' Whip 3 Wire
EM7	7W ~840 Lumen Battery backup		
EM5	5W ~600 Lumen Battery backup		

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.







JOB NAME:

CAT#:


TYPE:

DIMENSIONS



24L

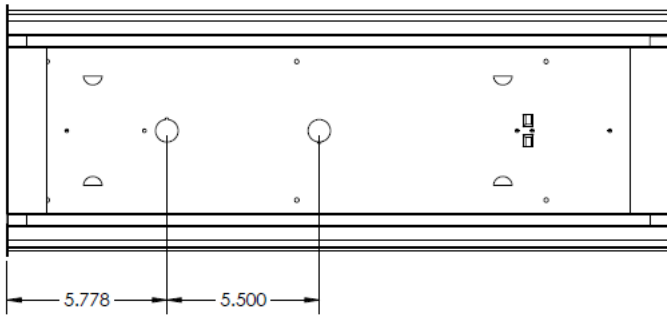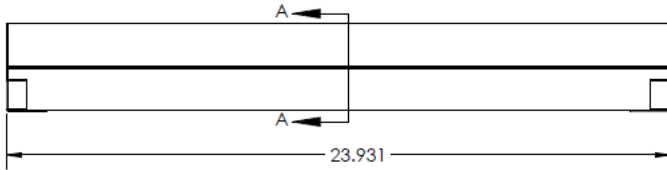

Section View

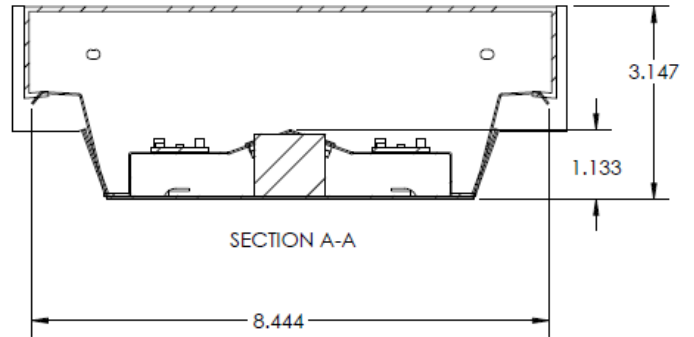

48L

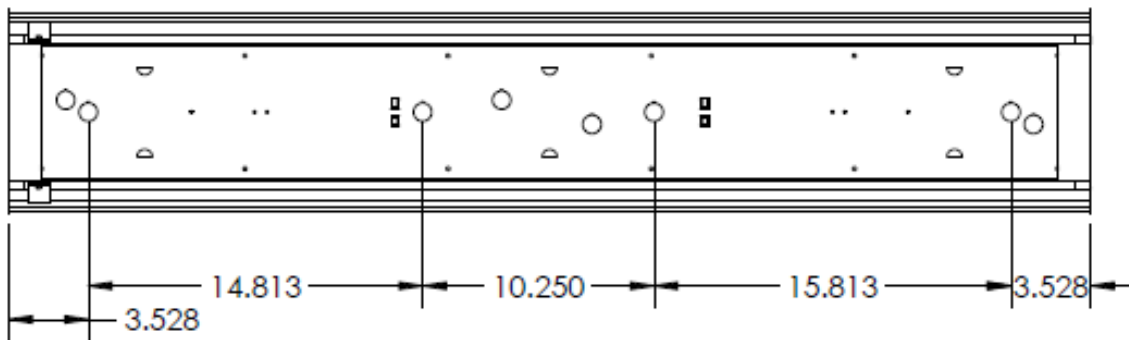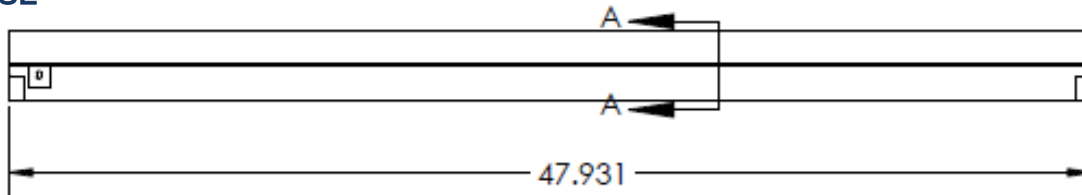

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

