



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This series combines the desirable characteristics of the traditional wraparound with an extremely low silhouette to provide a specification luminaire for the conservative budget. This series is engineered to provide comfortable brightness values in the direct glare zone.


Body ends are die formed of 20 gauge cold rolled steel for both rigidity and uniformity. A crystal clear diffuser extruded from 100% virgin acrylic will maintain its color under normal conditions indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then reflect back down. Diffuser is lift and shift for ease of relamping and cleaning and is capable of hanging down from either side of the housing.




FEATURES & BENEFITS

- Engineered to provide comfortable brightness values in the direct glare zone
- Available in two, four and eight foot lengths. Ideal for schools, stores, and offices
- Min CRI 80
- _cETL_{us} listed

DIMENSIONS

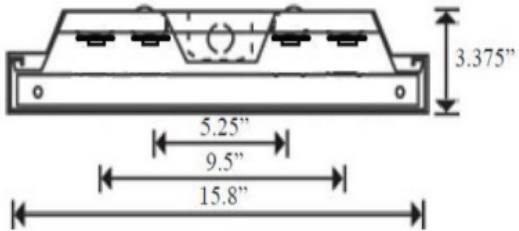

End Views

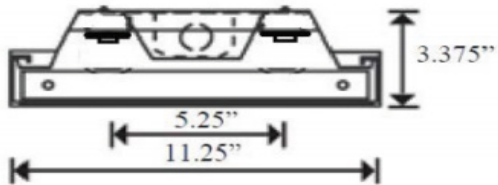



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 772 24 LED 20 DMV 30 EM

772

LED

| 1. SERIES | 2. SIZE | 3. WIDTH | 4. GEAR | 5. WATTAGE/LUMENS | 6. DRIVER | 7. LENS |
|------------|---|--|------------|---|--|--|
| 772 | 24 24" 48 48" 96 96" | (Blank) Standard W Wide | LED | 2 ft. 15 15 Watts 2100 Lumens 20 20 Watts 2700 Lumens 25 25 Watts 3300 Lumens 33 33 Watts 4250 Lumens 4 ft. 15 15 Watts 2500 Lumens 20 20 Watts 3300 Lumens 25 25 Watts 4100 Lumens 30 30 Watts 4950 Lumens 35 35 Watts 5650 Lumens 40 40 Watts 6400 Lumens 45 45 Watts 7100 Lumens 50 50 Watts 7800 Lumens 54 54 Watts 8250 Lumens 8 ft. 30 30 Watts 5000 Lumens 40 40 Watts 6600 Lumens 50 50 Watts 8200 Lumens 60 60 Watts 9900 Lumens 70 70 Watts 11300 Lumens 80 80 Watts 12800 Lumens 90 90 Watts 14200 Lumens 100 100 Watts 15600 Lumens 108 108 Watts 16500 Lumens | DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming Multivolt | (Blank) Clear Prismatic SW Smooth White |

8. COLOR TEMP

9. EMERGENCY (O)¹

| | | | |
|-----------|-------|------------|-----------------------------------|
| 30 | 3000K | EM | 10W ~1200 Lumen Battery backup |
| 35 | 3500K | | |
| 40 | 4000K | EM5 | 5W ~600 Lumen Battery backup |
| 50 | 5000K | | |

Notes:

¹(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

