



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Give your office a modern look with this 2.2" sleek, linear, direct/indirect channel. It has multi-volt integral driver for easy installation, and male and female wiring harnesses are included to join and hang channels with plug and play ease.



FEATURES & BENEFITS

- Available with satin aluminum or white finish
- Innovative anti-lightlead clips in the space between diffuser and end-cap
- Integral Driver for 0-10V Dimming
- End removes easily to allow continuous run.
- Integral wiring harnesses makes joining to the next channel easy
- Magnetic light leak block
- $L_{70} > 55000$ hrs.
- Min CRI 80





DIMENSIONS

48L

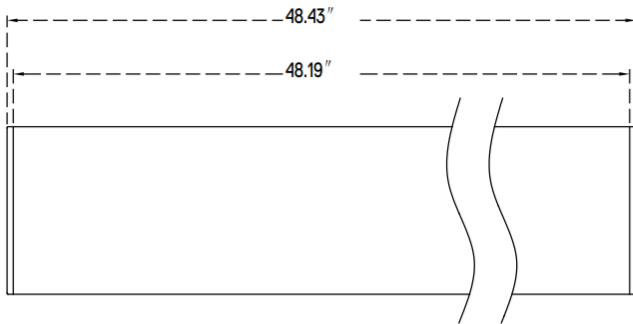

96L

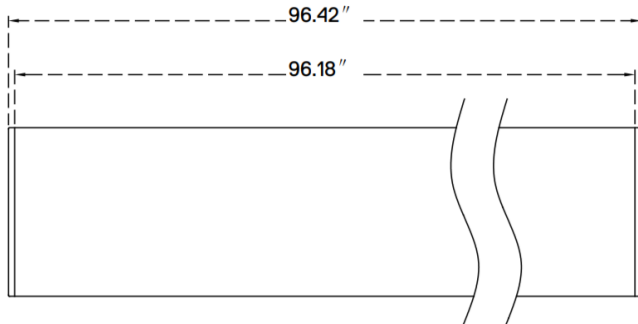

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: AIOCBF 48 LED 2U3D 45 DMV SA 30 H6W5

AIOCBF		LED							
1. SERIES	2. SIZE	3. GEAR	4. DISTRIBUTION	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH			
AIOCBF	48 48" 96 96" 144 144" 192 192"	LED	2U3D 40% Up and 60% Down	45 <u>48"</u> 1800U-2700D Lumens 90 <u>96"</u> 3600U-5400D Lumens 135 <u>144"</u> 5400U-8100D Lumens 180 <u>192"</u> 7200U-10800D Lumens	DMV 0-10V Dimming 120-277VAC Multivolt	SA Satin Aluminum WH White			
8. COLOR TEMP	9. HANGING KIT								
30 3000K 40 4000K	H6W5 Pendant Mounting Power Feed White Canopy 5 Wire Clear Cord and 6FT Cable H12W5 Pendant Mounting Power Feed White Canopy 5 Wire Clear Cord and 12FT Cable								

ACCESSORIES

- AIOJOINERTOOL** Tool Required To Use Mechanical Joiner (1 Per Installation needed)
- AIOCLENSTOOL** Tool Required to remove Lens (1 Per Installation Needed)



Dimensions and specifications subject to change without notice.