

Strip Lighting

2600 to 8600 Lumens

5 year limited warranty

20W, 33W, 50W
3000K, 4000K, 5000K



WATTAGE: 20W, 33W, 73W

COLOR TEMPERATURE: 3000, 4000, 5000K

COLOR RENDERING INDEX CRI: >80

WARRANTY: 5 Year Limited Warranty

PRODUCT FEATURES

- 8' length ships in 4' packaging and seamlessly connects for 8' strip
- Housing made of high quality steel with high reflectance paint providing high lumen output
- Suitable for use in -20°C to +40°C
- Polyester powder white finish, multi-stage process produces a 3mil thickness for superior corrosion and maximum environmental durability
- Precision and high reflectance lens producing superior uniformity
- Occupancy sensor (PIR) optional
- L70 > 50,000 Hours
- UL and cUL Listed

With it's slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, hotels, restaurants, commercial buildings, schools and colleges.

ELECTRICAL CHARACTERISTICS

- 120-277V standard,
- Class 2 constant current drivers with 90% power factor
- Dimming 0-10V driver standard
- Occupancy sensor optional

PHOTOMETRIC CHARACTERISTICS

- Color Temperature (CCT): 3000K, 3500K, 4000K 5000K
- Color Rendering Index (CRI): >80

See www.savegreenlighting.com/products for more features.


WARRANTY

5 Year Limited warranty



ORDERING GUIDE: GSR48L33M4400MDMVMCT

SERIES	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR TEMP	OPTIONS
GSR	24L 24"	20W2600L 20W 2600 Lumens	DMV 0-10V Dimming	MCT 3000K, 4000K, 5000K selectable via 3 position switch	EM14 14W Emergency battery backup
	48L 48"	33M4400M 22W 2700 Lumens 33W 4400 Lumens 45W 5700 Lumens Selectable via 3 position switch			
	96L 96"	50M6800M 33W 4100 Lumens 50W 6800 Lumens 69W 8600 Lumens Selectable via 3 position switch			
					ACCESSORIES HC101 20' Chain Kit with S hooks

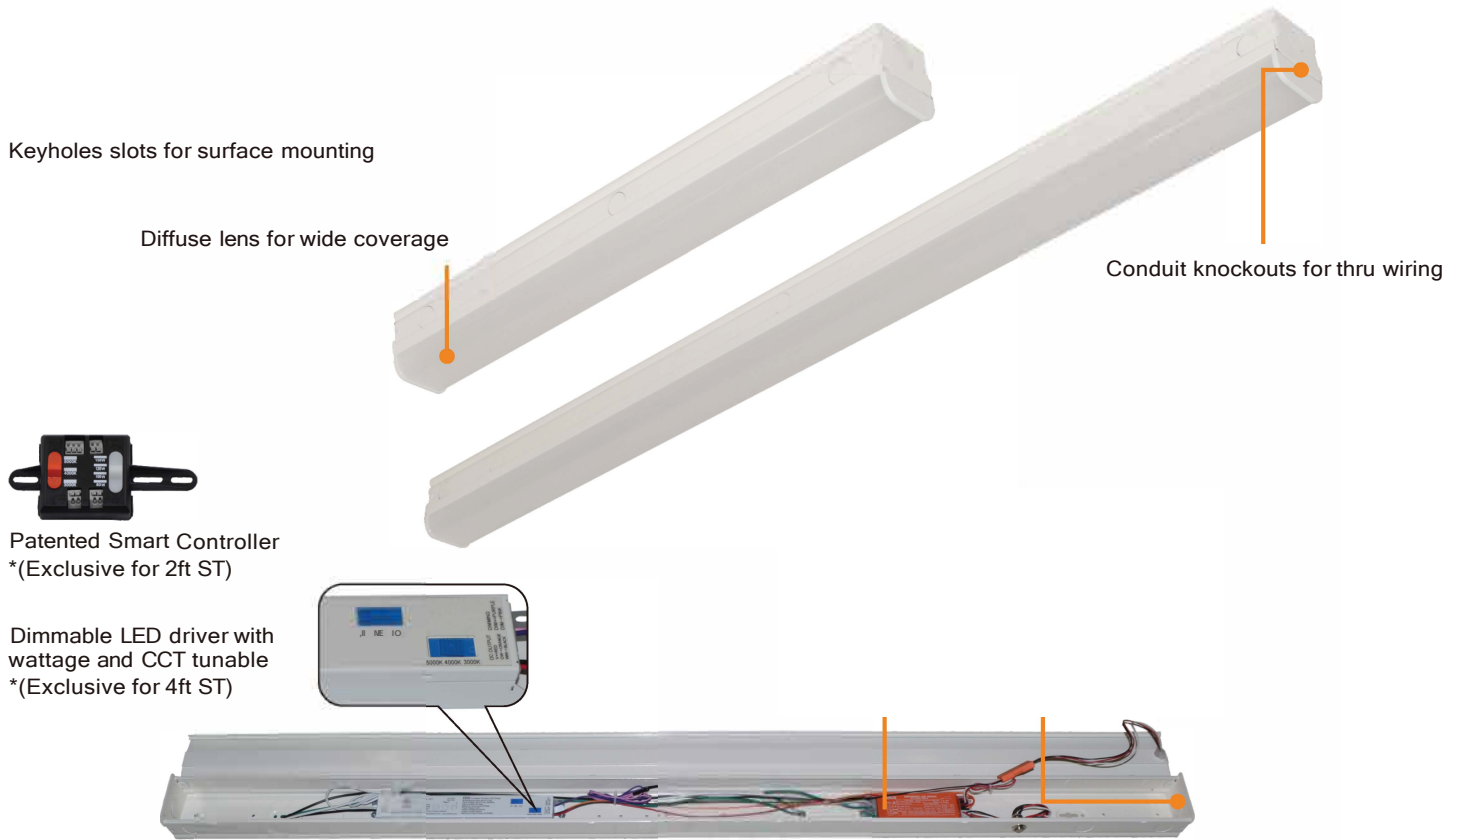

Keyholes slots for surface mounting

Diffuse lens for wide coverage

Conduit knockouts for thru wiring





Patented Smart Controller
*(Exclusive for 2ft ST)





Dimmable LED driver with
wattage and CCT tunable
*(Exclusive for 4ft ST)





DRAWINGS & PHOTOS

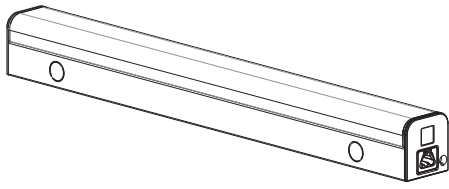

24.3"
(617mm)

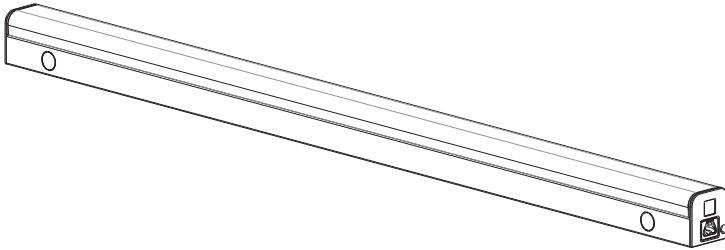

47.8"
(1216mm)

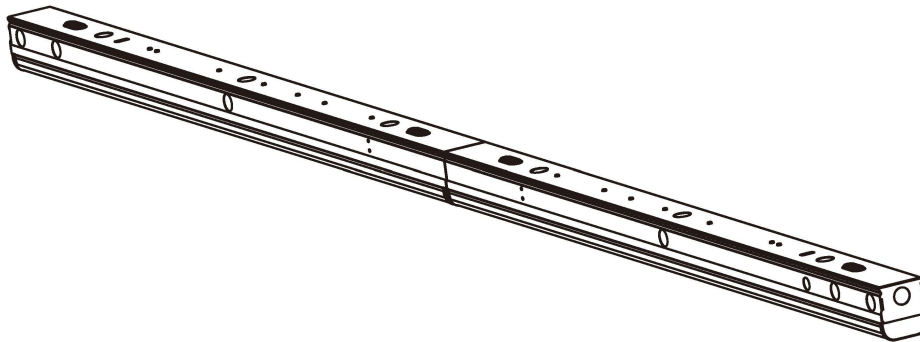

96"
2438mm

