



JOB NAME:

CAT#:

TYPE:

**APPLICATIONS**

Create a sophisticated yet simple look with these luminous ceiling clouds. Seamless edges and glowing light can span across a variety of sizes to compliment open ceilings. This fixture may also be used as custom signage by printing artwork directly on to the fabric lens. The graphics (typically printed using dye sublimation onto specially-engineered stretch fabric) achieve strong color saturation well-suited to minimize reflected light. Fixtures may be stem, pendant, or surface mounted, and are available in five standard sizes.

**FEATURES & BENEFITS**

- 5 standard sizes – 9" x 9", 12" x 12", 20" x 20", 24" x 24", 24" x 48"
- Customizable graphics and backgrounds available
- Pendant and surface mount options available
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90




**DIMENSIONS**


Part	W	L	W <sub>c</sub>	L <sub>c</sub>
IGB ST 9X9	9"	9"	4.5"	4.5"
IGB ST 12X12	12"	12"	6"	6"
IGB ST 20X20	20"	20"	10"	10"

Part	W	L	W <sub>2</sub>	W <sub>3</sub>	L <sub>2</sub>
IGB SM 24X24	24"	24"	23"	5.5"	10.8"
IGB SM 24X48	24"	48"	23"	5.5"	22.8"

**Stem mount configuration**

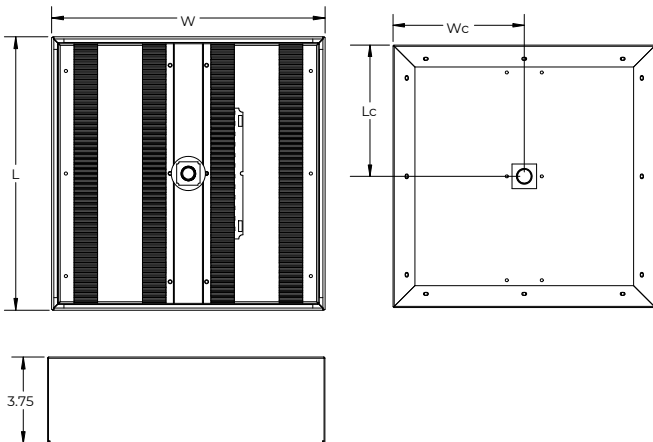

**Surface/pendant mount configuration**

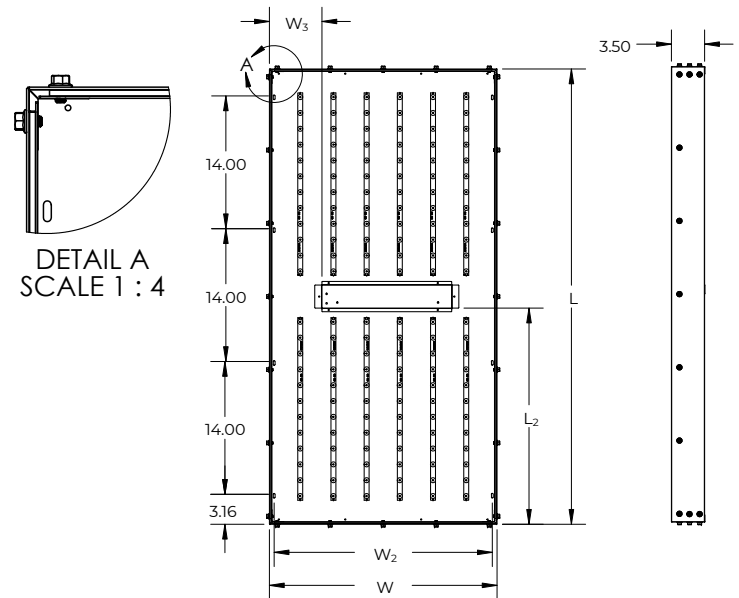

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: IGB SM 12X12 LED 12 DMV BK 30 EM14

IGB		LED				
1. SERIES	2. MOUNTING	3. WIDTH X LENGTH		4. GEAR	5. WATTAGE <sup>2</sup>	6. DRIVER
<b>IGB</b>	<b>P</b> Pendant	<b>9X9</b>	9"W x 9"L	<b>LED</b>	<b>9X9 in.</b>	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable
	<b>SM</b> Surface Mount	<b>12X12</b>	12"W x 12"L		<b>10</b> 10 Watts	
		<b>20X20</b>	20"W x 20"L		<b>12X12 in.</b>	
	<b>ST</b> Stem Mount <sup>1</sup>	<b>24X24</b>	24"W x 24"L		<b>12</b> 12 Watts	
		<b>24X48</b>	24"W x 48"L		<b>20X20 in.</b>	
		<b>48X48</b>	48"W x 48"L		<b>18</b> 18 Watts	
					<b>24X24 in.</b>	
					<b>22</b> 22 Watts	
					<b>24X48 in.</b>	
					<b>44</b> 44 Watts	
					<b>48X48 in.</b>	
					<b>88</b> 88 Watts	

8. FINISH <sup>3</sup>	9. LENS <sup>4</sup>	10. CRI	11. COLOR TEMP	13. EM (O) <sup>6</sup>
<b>WH</b> White	<b>Blank</b> Engineered Fabric Stretch Glow-White	<b>Blank</b> 80	<b>30</b> 3000K	<b>EM14</b> 14W Emergency Battery Backup <sup>5</sup>
<b>BK</b> Black		<b>9</b> 90	<b>35</b> 3500K	
		<b>40</b> 4000K		
		<b>50</b> 5000K		

**Notes:**

- <sup>1</sup>Consult for stem mounting options
- <sup>2</sup>Lumen output varies with fabric customization
- <sup>3</sup>White finish is standard, consult for other finish options
- <sup>4</sup>Fabric options available for all sizes
- <sup>5</sup>14W Emergency battery backup available, consult for other options
- <sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.