



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The linear 4x4 LED Linear fixture is for distinctive architectural lighting plans. Ideal for corridors, lobbies and office areas. The 4x4 Series fixtures can be installed individually or in group patterns. Die-formed and welded 22-gauge cold rolled steel. Removable end plates allow continuous wireway mounting.

FEATURES & BENEFITS

- Fixtures can be surface mounted, recessed mounted or pendant hung by stem or cable
- Accepts various lenses or louvers
- 8' units have a steel mullion to join two individual diffusers
- Optional welded light-leak flanges are available on ends
- Option to continuous row mount is standard by removing end plates
- Every fixture is individually tested
- Recessed versions are all IC Rated (L44R,L44RF,L44RR)
- cETL_{us} listed for damp location



Matte White





Louvered Option




No Reflector

DIMENSIONS

4FT Dimensions

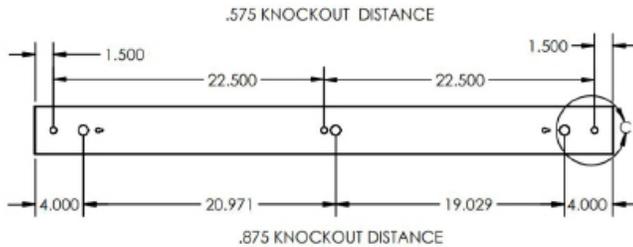


Type **P**
Pendant Mount



or


Type **S**
Surface Mount
Direct only



Type **WW**
Wall Wash



8FT Dimensions

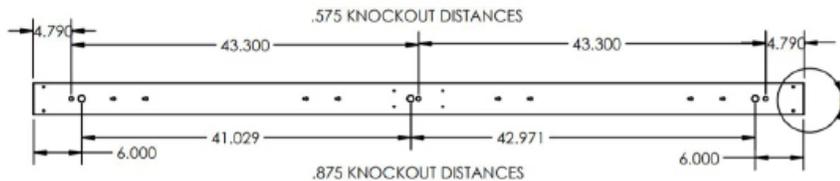




JOB NAME:

CAT#:



TYPE:

DIMENSIONS


Side View - Pendant Mount

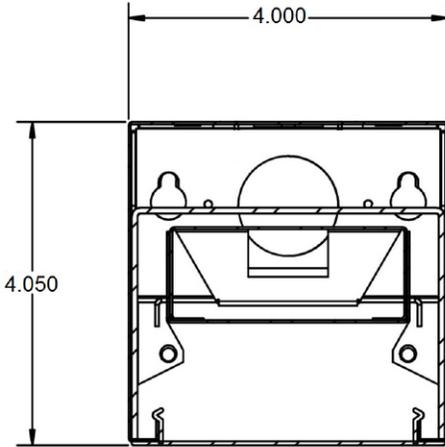


Side View - Wall Mount

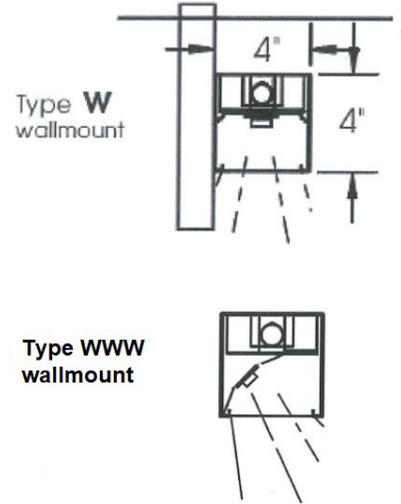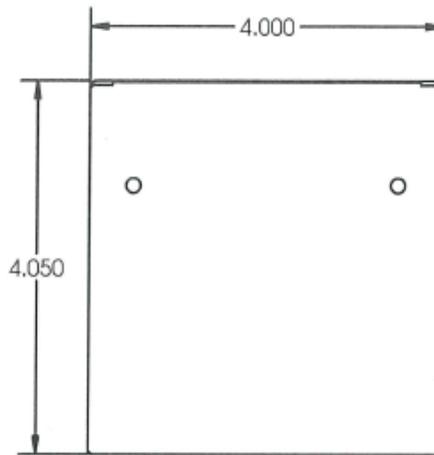

4FT Dimensions

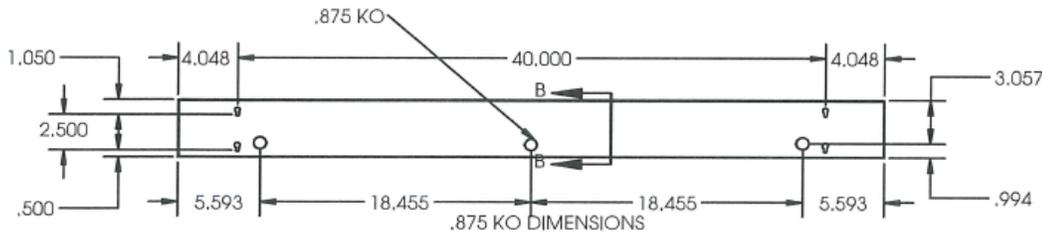

8FT Dimensions

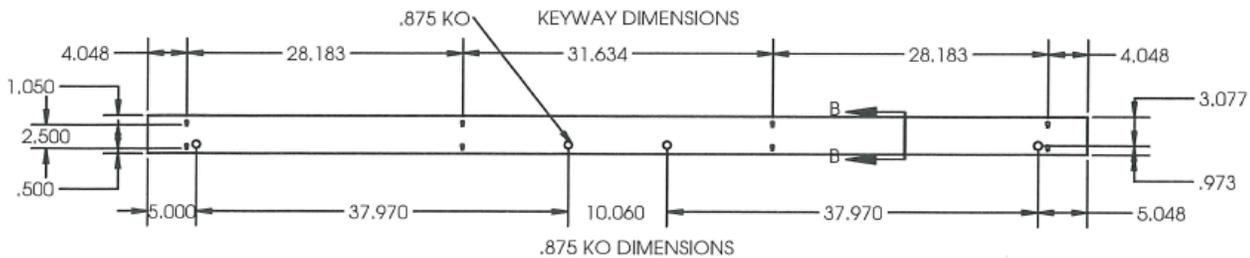




JOB NAME:

CAT#:

TYPE:

DIMENSIONS

Side View - Recessed

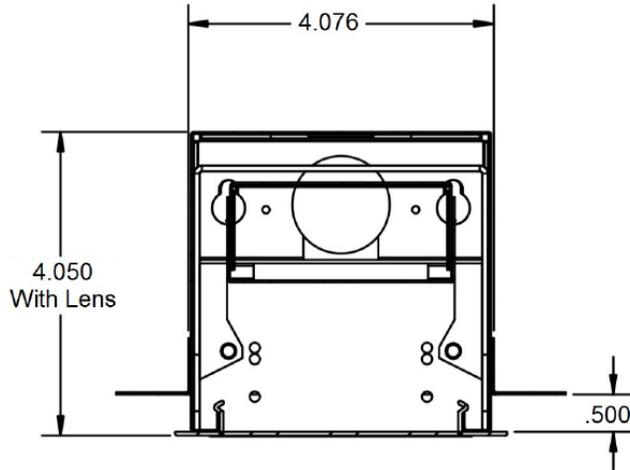

Flange Details

Type RR
Recess for Drywall/
Hard Ceiling
-RR (1/2 inch)
-RR650 (5/8 inch)
-RRxxx (custom depth)



Flangeless
Appearance

Type RF
Flush for Drywall




Flanged
Appearance

Type R
For 1" T-bar





Flangeless
Appearance

Type RWW/RFWW/RRWW
-Recess Wall Wash



Flanged/
Flangeless
Appearance

4FT-RR Dimensions

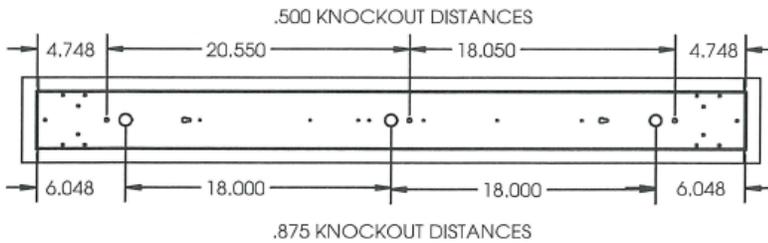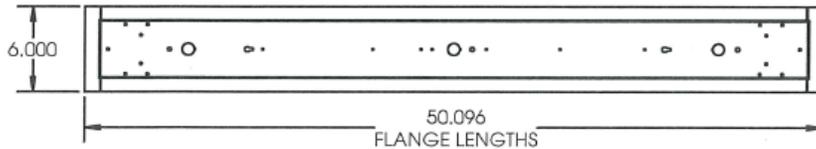



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L44R 48 LED 24 DMV WH MW 30 EM SS H4W P11

LED

| 1. SERIES | 2. LENGTH | 3. GEAR | 4. WATTAGE/LUMENS | 5. DRIVER | 6. FINISH | 7. LENS |
|---|--------------------|------------|--------------------------------|------------------------------------|-----------------------|--|
| L44R Recessed | 48 48" long | LED | <u>4 ft & 8 ft.</u> | DMV 120-277V Multivolt | WH Matte White | MW* Matte White (std) .100 thick regressed lens |
| L44RF Recessed Flange | 96 96" long | | 24 24W 2400 Lumens | 0-10V Dimmable | SL Silver | |
| L44RR Recessed Flangeless Appearance | | | 48 48W 4800 Lumens | SDMV Step dimming Multivolt | BK Matte Black | S.5 Specular Parabolic Louver (1/2"x1/2"x3/8") |
| L44S Surface Mount | | | 57 57W 5400 Lumens | LUT Lutron Driver1 | BZ Bronze | SF Snap-in Frosted Lens -85% Transmission |
| L44W Wall Mount | | | <u>8 ft. only</u> | | IN Iron | LV Baffled Louver |
| L44P Pendant Mount | | | 97 97W 9600 Lumens | | | |
| | | | 114 114W 10800 Lumens | | | |

* MW lens on the 8' fixture requires a center support bracket to hold it in place

| 8. COLOR TEMP | 9. REFLECTOR(O) ² | 10. EM(O) ² | 11. SENSOR(O) ² | 12. HANGING KIT(O) ² |
|-----------------|------------------------------|--|-------------------------------------|--|
| 30 3000K | Blank Standard | EM Emergency Battery Pack 10W ~ 1700 lumens | SS Integral Occupancy Sensor | H4W Cable kit with 4 cable + power feed cable incl. w/ white canopy |
| 35 3500K | WW Wall Wash | EM5 Emergency Battery Pack 5W ~ 850 Lumens | SNS200 ALC Qualified | H4W5 Cable kit with 4' cable + power feed 0-10V dimming cable included w/ white canopy (5 wire) |
| 40 4000K | | | | H4W6 Cable kit with 4' cable + power feed 0-10V dimming and EM cable incl. w/ white canopy (6 wire) (check local codes) |
| 50 5000K | | | | H12W Cable kit w/ 12' cable + power feed cable incl.w/ white canopy |
| | | | | H12W5 Cable kit w/ 12' cable + power feed 0-10V dimming. Cable included with white canopy (5 wire) |

| 13. PLUG IN(O) ² | 14. CONFIGURATION |
|--|-------------------------|
| P11 3 wire harness, including white, black and green | BLANK Individual |
| P12 4 wire harness, including white, black, green and blue for emergency backup | -B Beginner Run |
| P13D 5 wire harness, including white, black, green, violet and gray | -E Ender Run |
| | -J Joiner |

Notes:

*See Lutron Chart for Driver & Controls Options

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:


TYPE:

L44 JOINER BOX


The L44 joiner box provides a sleek and modern solution for joining multiple linear fixtures to produce a visually appealing and continuous run. Easily create custom runs featuring 90° turns as well as “X” and “T” patterns. The joiner box is available in the same colors as the linear fixtures for the perfect match and finish.

FEATURES AND BENEFITS

- Joiner box can be pendant hung by stem or cable
- Available in 1 way, 2 way, 3 way, and 4 way options
- Seamless design that is both fashionable and functional
- Formed and welded 22-gauge cold rolled steel
- Internal press in nuts creates ease in joining assembly
- Grommeted wire ways protect wiring

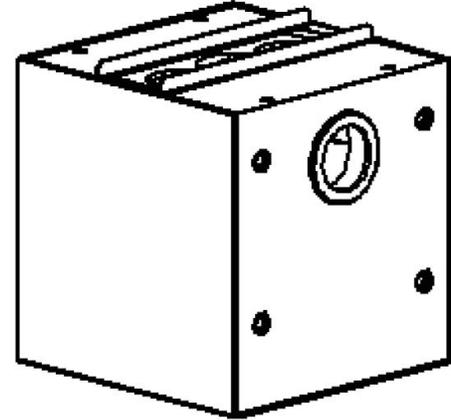

DIMENSIONS

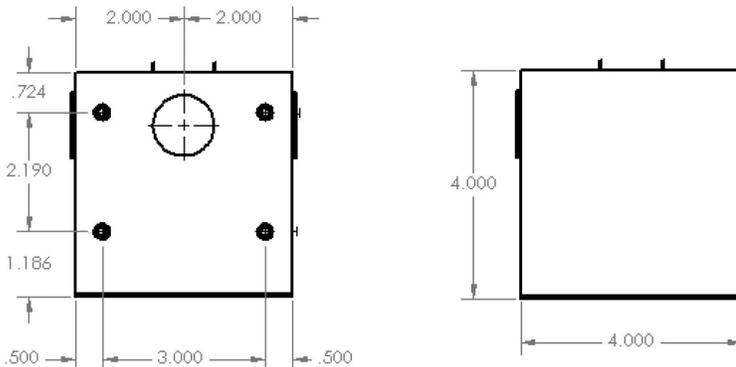

ORDERING

EXAMPLE: L44_JB -1WAY P WH A-HC301WH

| 1. SERIES | 2. CONFIGURATION | 3. HK | 4. FINISH | 5. OPTIONS |
|-----------|--|-------------------------|---|--|
| L44_JB | -1WAY -2WAY 90° -2WAY 180° -3WAY -4WAY | P Power NP Non-Power | WH White BK Black SL Silver IN Iron BZ Bronze | A-HC301WH Cable kit with 4' cable + power feed cable included with white canopy A-HC301WH5W Cable kit with 4' cable + power feed 0-10Vdimming cable included with white canopy (5 wire) A-HC302WH Cable kit with 12' cable + power feed cable included with white canopy A-HC3025WHW Cable kit with 12' cable + power feed 0-10Vdimming cable included with white canopy (5 wire) |

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.