

CATALOG# : _____

PROJECT : _____

TYPE : _____

Series SM

LED Side Mount Strip

Specification grade, side mount strip for interior warehouse, retail, and utility areas requiring side mount configurations for shallow depth in a commercial quality narrow strip body.

CONSTRUCTION


Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided at end of housing. Ballast covers attach without tools to simplify ballast access.

MOUNTING

Surface mount.

OPTIONS

Whips, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

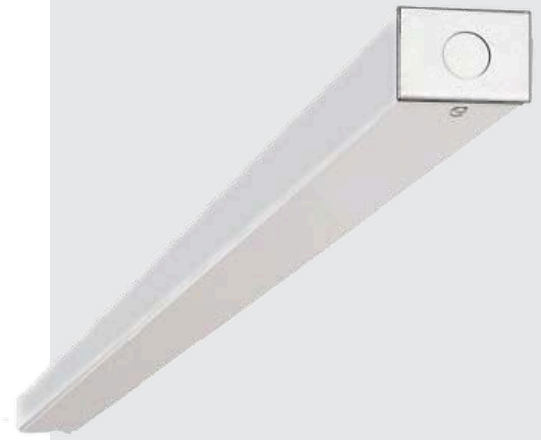

FIXTURE DIMENSIONS

24L: 2.75W x 2.0H x 24.0L

48L: 2.75W x 2.0H x 48.0L

SPECIFICATIONS

- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty





CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series SM

LED Side Mount Strip

ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

Sample Part Number:

SERIES	LENGTH		WATTAGE*1		DRIVER		CCT/CRI		OPTIONS	
SM	24L	24"L	S12W1400L	12 Watts, 1,400 Lumens	DMV	120-277VAC 0-10V Dimming	30K	3000K 80 CRI	WP	6 ft. 3 wire 18 gauge whip
			H18W2050L	18 Watts, 2,050 Lumens						
			S24W2800L	24 Watts, 2,800 Lumens						
			H35W4000L	35 Watts, 4,000 Lumens						
	48L	48"L	S28W3200L	28 Watts, 3,200 Lumens	MV	Multi-Volt 120-277VAC	35K	3500K 80 CRI		
			H35W4000L	35 Watts, 4,000 Lumens						
			S44W4400L	44 Watts, 4,400 Lumens						
			H72W8200L	72 Watts, 8,200 Lumens						
						40K	4000K 80 CRI			
						50K	5000K 80 CRI			
								WP10	6 ft. 4 wire 18 gauge whip	

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

CATALOG#: _____
PROJECT: _____
TYPE: _____

PRODUCT DIMENSIONS

