



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series WPU

Wall Puff Linear Fixture

Contemporary narrow white cloud vanity has rounded corners and can be mounted vertically or horizontally. Diffuser fully encloses the fixture providing a clean appearance. Power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.

CONSTRUCTION


The wiring channel is formed from 22 gauge steel and is provided with standard mounting holes and wiring access. Housing is finished in lighting grade baked gloss white enamel paint.

DIFFUSER

Diffuser is vacuum formed 0.125" thick crepe matte texture. Diffuser is secured with a screw on each end.

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup, cord sets. Contact factory for more details.

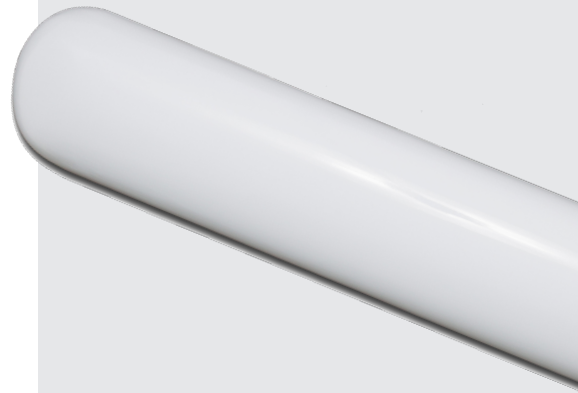

DIMENSIONS


WPU24L - 27"L x 6"W x 2.75"H
WPU48L - 51"L x 6"W x 2.75"H

FEATURES & BENEFITS

- Available in 27" and 51" length
- Contemporary and sleek bar
- May be mounted vertically or horizontally
- Designed for commercial or residential use
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V
- 120-277V standard, 120 ELV/TRIAC optional
- Power factor >0.90
- IC Rated for dry and damp locations
- 5 year warranty



DRAWINGS & IMAGES

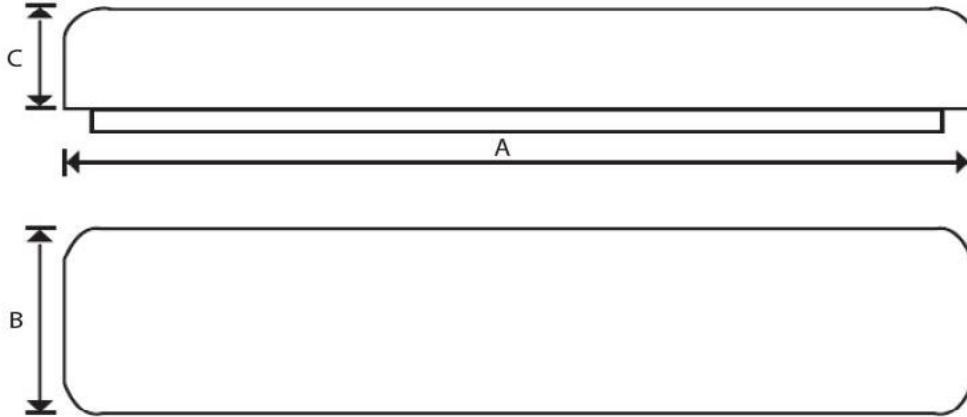

SERIES	A	B	C
WPU24L	27"	6.0"	2.75"
WPU48L	51"	6.0"	2.75"

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	SIZE	WATTAGE & LUMENS		DRIVER		COLOR		CRI **	
WPU	24L 27" Length	S24W2250L	24 Watts 2250 Lumens	DMV	0-10V Dimming	30K	3000K	Blank 90	CRI 90 CRI
	G120			ELV/Triac Dimming at 120V only	35K	3500K			
	48L 51" Length	S48W4500L	48 Watts 4500 Lumens	D1MV	0-10V Dimming (dim to 1%)	40K	4000K		
						50K	5000K		

Additional Options

OPTIONS	
WP	6ft. 3 wire 18 gauge whip
WP4	6ft. 4 wire 18 gauge whip (non dimming EM)
WP5W	6ft. 5 wire 18 gauge whip
WP6W	6ft. 6 wire 18 gauge whip (dimming EM)
EM	10W emergency battery backup (remote only)
EM12	12W emergency battery backup (remote only)
EM20	20W emergency battery backup (remote only)

** Consult factory for 90 CRI 5000K availability.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.