



CATALOG#: _____
 PROJECT: _____
 TYPE: _____



Series CXTEU

LED Exit & Incandescent Emergency Combo

ILLUMINATION

- Two fully adjustable 5.4W glare-free lamp heads
- Smooth thermoplastic reflector and plastic lens for optimal light distribution
- Ultra bright, energy efficient, long life Red or Gree LED Exit sign illumination

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates batter charging to recharge a discharged battery in 24 hours
- Remote capacity available

MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant high-impact resistant, thermoplastic in white or black finishes
- EZ snap-out chevron directional indicators

WARRANTY

- Five year warranty on all electronics and housing. Battery pro-rated for two years
- UL Listed for damp locations (20°C - 40°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

DIMENSIONS

27 1/4"L x 2 3/4"W x 11"H

FEATURES & OPTIONS

- SDT: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- HTR: Optional internal heater for cold temperature applications
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No 141-02 standard for unit equipment

STANDARD



OPTIONAL




ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CXTEU	2 Universal Single/Double	R Red	W White	RC Remote Capacity
		G Green	B Black	HTR Internal Heater ¹
				SDT Self-diagnostics

Note:
¹ Not available with RC units

DRAWINGS

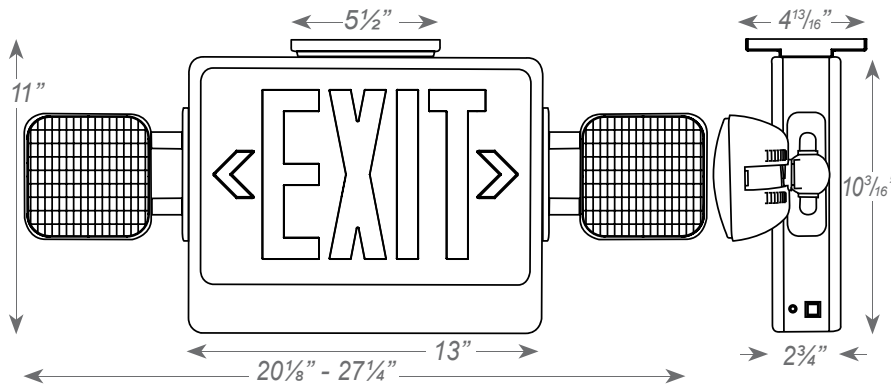

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CXTEU/SDT	10	10	0.10	0.05
CXTEU-RC/RC-SDT	15	15	0.12	0.06

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
CXTEU-RC	6V	11W			X	X	X		X		X		X		X

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.