



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series DFUCLL

## All-In-One Retrofit Kit Center Basket

Convert an existing linear fluorescent fixture to a state-of-the-art linear LED fixture in minutes with LED All-In-One retrofit kit that will not only increase lighting performance, save energy and reduce maintenance but provide a fresh new look for the space. The Center Basket All-In-One retrofit kit provides the look of a popular indirect/direct linear fixture with a specially designed reflector and LED lens to provide comfortable, abundant lighting.

### CONSTRUCTION

Completely die-formed from 22-gauge cold rolled steel. Frosted lens.

### MOUNTING

Mounts in minutes to two side rails that mount between the fixture body and the T-bar. Available in 2x2 or 2x4 sizes and a variety of wattage, lumens and color temperatures.

### TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup.



### DIMENSIONS

2x2 - 23.90"L x 23.85"W x 3.65"H  
2x4 - 47.90"L x 23.85"W x 3.65"H

### FEATURES & BENEFITS

- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Multiple color temps available (3000K, 3500K, 4000K and 5000K); consult factory for RGBW option
- Programmable drivers allow a variety of lumen packages and wattages
- Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional
- Power factor >0.90
- Emergency battery backup available
- 5 year warranty



**ORDER INFORMATION**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENGTH	WATTAGE* & LUMENS*	DRIVER	CCT**	OPTIONS
DFUCLL All-in-One Center Basket	22L 2x2	Y20W2700L 20 Watts 2700 Lumens	DMV 0-10V Dimming	30K 3000K 80 CRI	EM 10W Emergency battery backup for 90 min
		Y25W3325L 25 Watts 3325 Lumens	G120 ELV/TRIAC Dimming at 120V only	35K 3500K 80 CRI	EM12 12W Emergency battery backup for 90 min
		Y33W4275L 33 Watts 4275 Lumens	D1MV 0-10V Dimming (dim to 1%)	40K 4000K 80 CRI	EM20 20W Emergency battery backup for 90 min
	24L 2x4	Y25W3800L 25 Watts 3800 Lumens		50K 5000K 80 CRI	
		Y35W5250L 35 Watts 5250 Lumens		930K 3000K 90 CRI	
		Y45W6600L 45 Watts 6600 Lumens		935K 3500K 90 CRI	
		Y54W7700L 54 Watts 7700 Lumens		940K 4000K 90 CRI	
				950K 5000K 90 CRI	

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

\*\* Consult factory for 90 CRI 5000K availability.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_



# Series DFUCLL

All-In-One Retrofit Troffer Kit  
Center Basket



## DRAWINGS & IMAGES

**Back  
2x2**

**End**

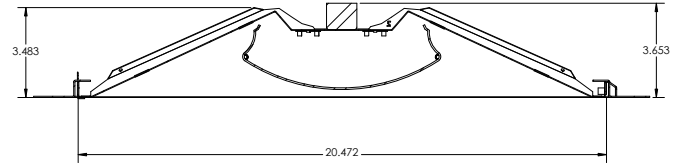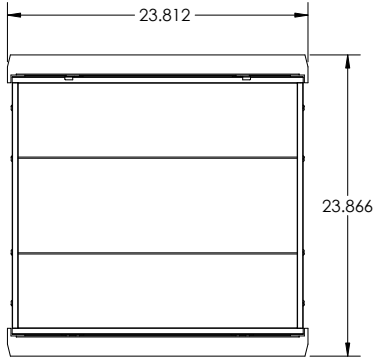

**2x4**

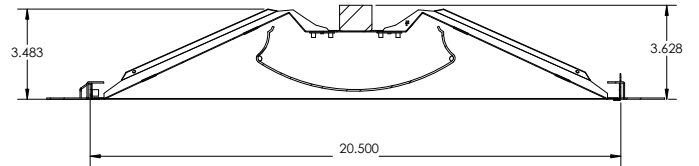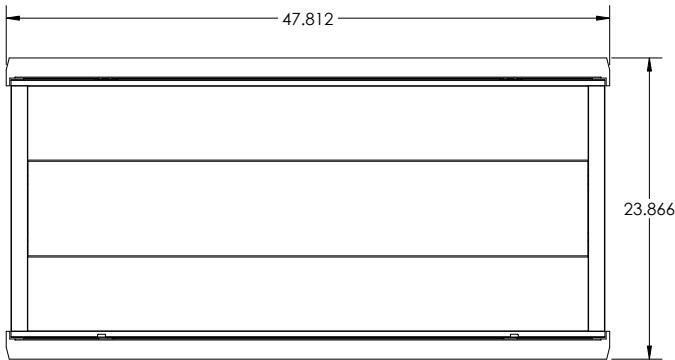

### Mounting Strips





### Replacement Lens Ordering Information

SERIES	DESCRIPTION
ODFUCLL2x2	Replacement lens for 2x2
ODFUCLL2x4	Replacement lens for 2x4

## PHOTOMETRICS



### 22L - DFUCLL22LF28W3350LDMV40K

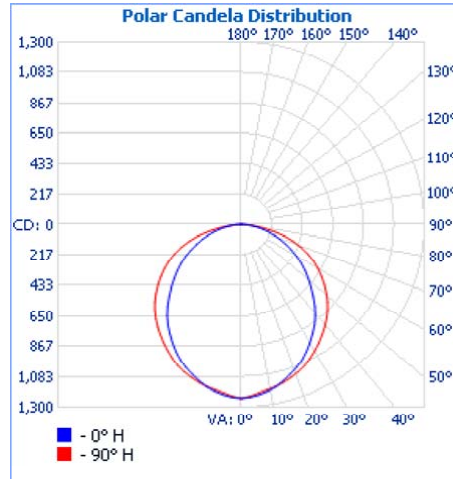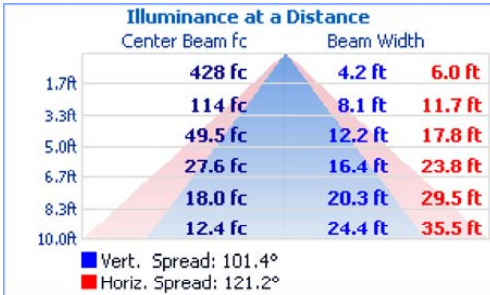

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	931.7	27.1%
0-40	1,515.4	44.1%
0-60	2,666.7	77.5%
60-90	772.1	22.4%
70-100	340.2	9.9%
90-120	0.7	0%
0-90	3,438.8	100%
90-180	0.7	0%
0-180	3,439.5	100%

### 24L - DFUCLL24LF57W7800LDMV40K

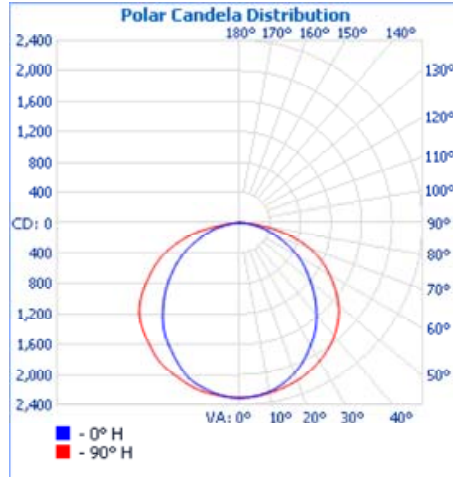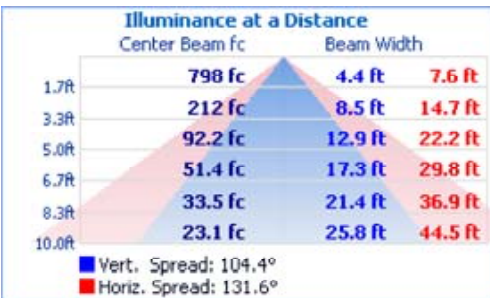

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,800.4	25.5%
0-40	2,969.0	42%
0-60	5,374.5	76.1%
60-90	1,687.3	23.9%
70-100	750.8	10.6%
90-120	0.9	0%
0-90	7,061.8	100%
90-180	0.9	0%
0-180	7,062.7	100%