



CATALOG#: _____
 PROJECT: _____
 TYPE: _____

Series EZXTEU

LED Exit Sign



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED

ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- EZ snap-out chevron directional indicators
- Compact, low-profile design

WARRANTY

- Five year warranty on all electronics and housing. Battery pro-rated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations. (0°C-50°C)

DIMENSIONS

12 3/4"L x 1 3/4"W x 8"H

OPTIONS

- SDT: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a backup to the other) supplies at the same time.
- Custom signs available with requested "special" wording
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act6.
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment
- 5 year warranty

STANDARD



OPTIONAL




ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EZXTEU	1 Single Face	R Red	W White	Blank AC only	SDT Self-diagnostics ¹
	2 Universal Single/ Double Face	G Green	B Black	EM Battery Backup	Custom Custom Wording 2C Dual Circuit operation ² cULus cULus Listed

Notes:
¹ Available only with EM units
² Available only with AC units

DRAWINGS

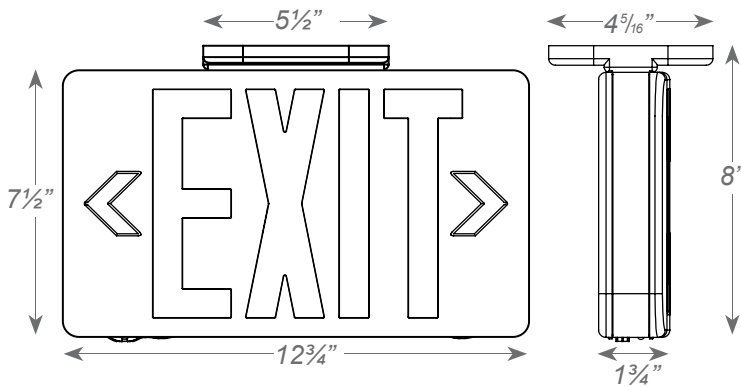

ELECTRICAL INFORMATION

Catalog Number	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZXTEU-RED/GREEN/EM/2C/SDT	3.8	3.8	0.034	0.020

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.