



CATALOG#: _____
PROJECT: _____
TYPE: _____

Series EZXTEU-RC

Remote Capable LED Exit Sign



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED

ELECTRICAL

- Dual 120-277 voltage
- Offers 11W of remote capacity
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- EZ snap-out chevron directional indicators

WARRANTY

- Five year warranty on all electronics and housing. Battery pro-rated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations. (20°C-50°C)

DIMENSIONS

13"L x 2 1/2"W x 10 15/16"H

OPTIONS

- SDT: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- HTR: Optional internal heater for cold temperature applications
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment

STANDARD



OPTIONAL




ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EZXTEU-RC	1 Single Face	R Red	W White	EM Battery Backup	SDT Self-diagnostics ¹
	2 Universal Single/Double Face	G Green	B Black		HTR Internal Heater

Special voltage & SALIDA face plate options available.
 Check with your Saylite representative.

DRAWINGS

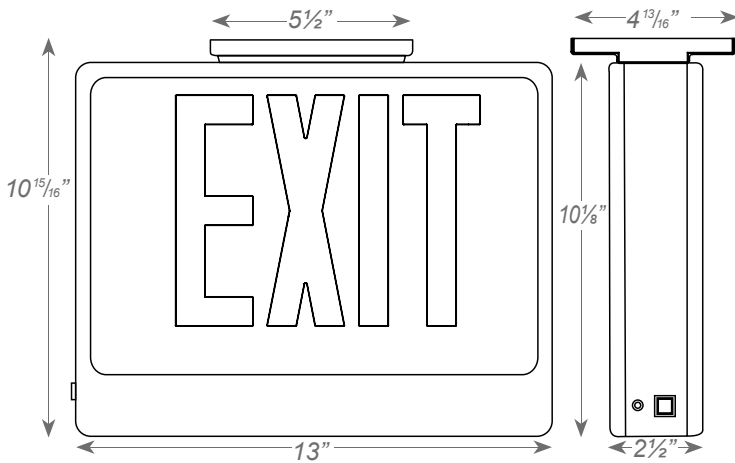

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZXTEU-RC/RC-SDT	10	10	0.10	0.05

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
EZXTEU-RC/RC-SDT	6V	11W			X	X	X		X		X		X		X

Note:
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.