



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series F1303

LED Round Wet Location Close-To-Ceiling

Excellent for lighting residential exteriors, entry ways, stain ways, walkways, perimeters, parking garages, storage areas, and warehouses. Choice of white or black molded plastic housing with white powder coated steel gear tray in a choice of styles LED, incandescent or fluorescent versions with polycarbonate diffuser. UL listed for wet location. Energy Star rated.

CONSTRUCTION

Molded of Durable Non-Corrosive UV Resistant Resins. Wall or Ceiling Mounted.

TYPICAL OPTIONS & ACCESSORIES

Photocell or motion sensor options.



DIMENSIONS

Height: 4.50"
Length: 9.375" Dia.


FEATURES & BENEFITS

- Available in black or white housing with white lens
- Wall or Ceiling Mounted
- Knockouts for Conduit or Photocell
- 80 CRI
- 50,000 hrs L70 Ambient Operating Temperature -40C to +40C
- 120V to 277V, 50/60Hz, 3 years warranty
- 120V Dimming, 50/60Hz, 5 years warranty



CATALOG#: _____
PROJECT: _____
TYPE: _____

DRAWINGS & IMAGES

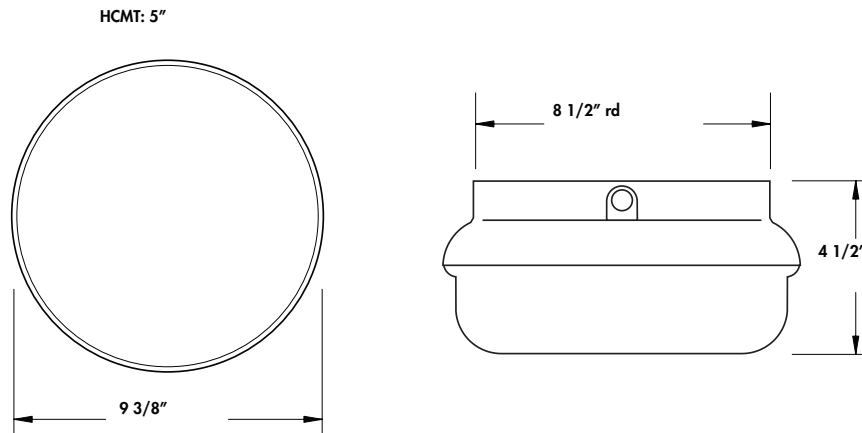

PRODUCT NUMBERS

| ITEM NUMBER | DESCRIPTION |
|------------------------|---|
| F13032INCLPLEDWH | ROUND CEILING WET 2Incand. socket & LED Lamp 9.5W A19 27K Incl. White Dimmable 120V |
| F1303L23W1900LD120WH40 | ROUND CEILING WET 23W 1900L White Dimmable 120V |
| F1303L22W1824LMVWH40K | ROUND CEILING WET 22W 1824L White Multi-Volt |