



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series IRCR

## Ultra Thin Faux Downlight

Now Performance of a recessed close to ceiling downlight in an extremely low profile (less than one inch deep) surface mount LED fixture. A round silhouette white housing with a special regressed lens to provide even, comfortable illumination from these edge-lit fixtures. Now enjoy the most consistent, low wattage general lighting from a sleek, fresh appearance. Fixture with LED driver mounts easily to a snap in brackets that fits into a standard junction box. Wet location for indoor and outdoor use. 120V only. Dims to 10% with standard dimming.

### CONSTRUCTION

Housing is made of die-formed cold-rolled steel. Diffuser is high transmission create excellent light distribution and uniformity.

### MOUNTING

Surface mounts to existing Junction-box or new construction with two screws.



### DIMENSIONS

Dimensions:  
5L: 5"Dia x 0.625"H  
7L: 7"Dia x 0.625"H  
11L: 11"Dia x 0.625"H

### FEATURES & BENEFITS

- Easy installation for remodeling or new construction
- White housing with matte white lens
- Ceiling or wall mounted only
- Extremely low profile
- 3000K
- CRI >80
- 120V
- Suitable for dry, damp or wet location
- 5 year warranty



CATALOG#: \_\_\_\_\_

PROJECT: \_\_\_\_\_


TYPE: \_\_\_\_\_

## Series IRCR

### Ultra Thin Faux Downlight

### DRAWINGS & IMAGES

PART	D	H
IRCR5L	5"	0.65"
IRCR7L	7"	0.65"
IRCR11L	11"	0.65"

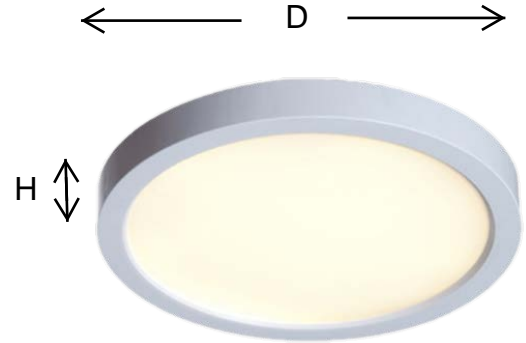

### ORDER INFORMATION

ITEM NUMBERS	INPUT VOLTAGE	WATTS	LUMENS	FINISH	CCT	DIMENSIONS
IRCR5L11W600L30KWH	120V	11	600	White	3000K	5" Dia x 0.65"H
IRCR7L16W1000L30KWH	120V	16	1000	White	3000K	7" Dia x 0.65"H
IRCR11L18W1400L30KWH*	120V	18	1400	White	3000K	11" Dia x 0.65"H

\*Limited stock remaining.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.