

# Hashtag Series

## Linear LED Cross-Fixture System

The Hashtag series provides the ability to alter your space with a crisp, original Linear LED cross-fixture system. Two tiers of staggered L23 luminaires create an intriguing, contemporary look that will add beauty and sophistication to any space.


A specially designed mounting system combines linear LED luminaires with a fresh design that provides bright, white and energy efficient illumination. This series is a wonderful choice to brighten up your office or retail space.

### CONSTRUCTION

The mounting system is laser-cut, fabricated and welded from 14 gauge powder coated cold-rolled steel. An easy access knockout on the mounting bracket provides an effortless wiring method.

### FLAIR

Customize the color of your end caps to add flair to your unique cross-fixture system. Consult factory for more information.

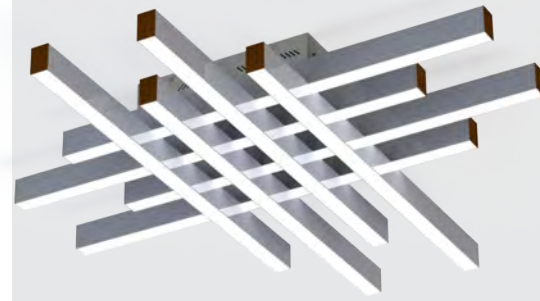

SYSTEM DIMENSIONS  
58.25"W x 58.25"L x 9"H

### SPECIFICATIONS

- Custom flair colors for endcaps available.
- Surface mount system for ceiling.
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty





CATALOG# : \_\_\_\_\_

PROJECT : \_\_\_\_\_

TYPE : \_\_\_\_\_

# Hashtag Series

Linear LED Crosshatch System

## ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

Sample Part Number: L23H-S-FR-58X58-LR-D148-DMV-WH-30K-RD

SERIES	MOUNTING	DIFFUSER	WIDTH X LENGTH	GEAR	WATTAGE & LUMENS <sup>1</sup>	DRIVER
L23H	S Surface	FR Frosted	58X58 58.25"W x 58.25"L	LR	D148 148 Watts 17020 Lumens  D266 266 Watts 30590 Lumens	DMV 0-10V Dimming

FINISH <sup>2</sup>	CCT	FLAIR <sup>3</sup>	EMERGENCY
WH White	30K 3000K/>80 CRI	RD Red	EM14 14W Emergency battery backup
BK Black	35K 3500K/>80 CRI	BL Blue	
SL Silver	40K 4000K/>80 CRI	BK Matte Black	
	50K 5000K/>80 CRI		

### Note:

- Values shown are total per **system**, wattage and lumen totals based on values from individual fixtures.  
Minimum fixture wattage of 160W, maximum fixture wattage of 266W.
- Consult product catalog for more finish color options.
- NEW!** Personalize your lighting even further by choosing a custom color for your fixture endcaps from the guide on the following page.

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

### FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)



Statuary Bronze  
(BZ)



Glimmer (Iron)  
(IR)



Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)




Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

## PRODUCT DIMENSIONS

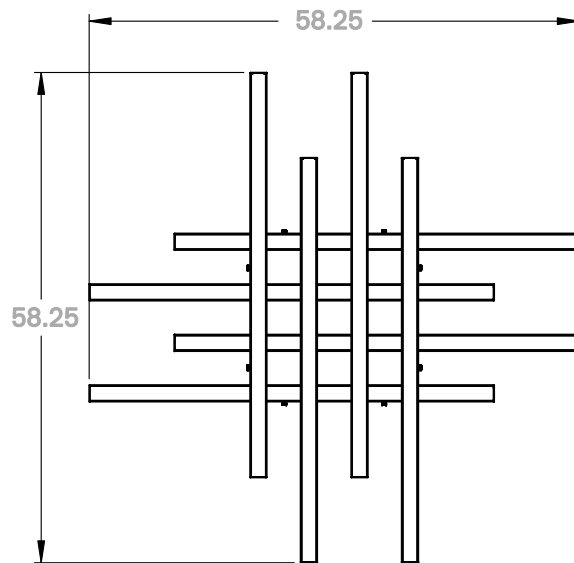

## MOUNTING BRACKET

