

# Series LEDCXTEU

## All LED Exit & Emergency Combo



### ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads
- 1W (8 LEDs x 0.125 watts) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing
- Long life, energy efficient Red or Green LED EXIT sign illumination

### ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 9.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard

### MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant high-impact resistant, thermoplastic in white or black finishes
- EZ snap-out chevron directional indicators

### WARRANTY

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### DIMENSIONS

20 5/16"L x 4 5/16"W x 8 5/8"H

### FEATURES & BENEFITS

- HL: 12-LED heads provide center-to-center spacing (1.5W per head)
- SD: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- UL Listed for damp locations (0°C-40°C)
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

STANDARD



OPTIONAL




## ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LEDCXTEU	1 Single Face	R Red	W White	RC Remote Capable
	2 Universal Single/Double	G Green	B Black	HL High Lumen SDT Self-diagnostics

## DRAWINGS & IMAGES

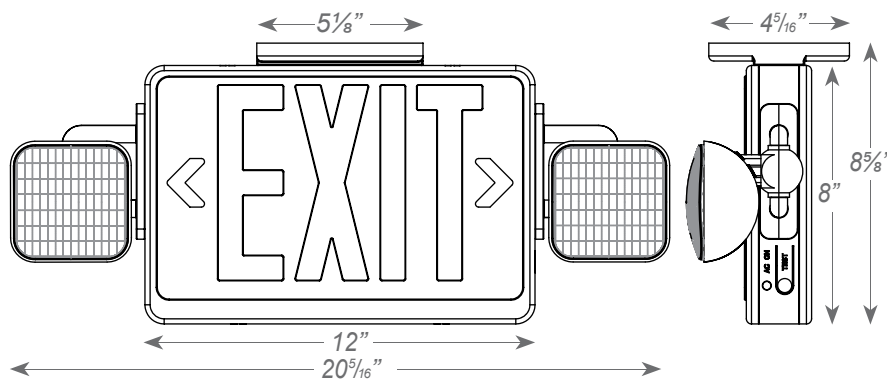

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LEDCXTE-RED	3.7	3.8	0.040	0.020
LEDCXTE-GREEN/RC	3.0	3.2	0.030	0.014
LEDCXTE-RED-RC	3.4	3.6	0.033	0.015
LEDCXTE-RED/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			MRHLED	RHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
				MV		6V	12V	6V	12V	6V	12V	6V	12V		
LEDCXTEU-RC	9.6V	3W-4W		X	X										

Note:  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.