

**JOB NAME:**
**CAT#:**
**TYPE:**

## ILLUMINATION

- Long lasting, efficient, ultra bright white LEDs
- 12.0 watts (2 LEDs x 6.0 watts) per unit
- Mirror-bright reflector and prismatic polycarbonate refractor
- Can be used as a normally-ON or normally-OFF luminaire as well as on a switched circuit
- Dissipates 1286 lumens in AC mode and 350 lumens in DC mode

## ELECTRICAL

- Universal 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meets electrical and life safety codes
- Photocell control sensor included as standard for use as dusk-to-dawn luminaire
- Field-selectable wiring allows for AC operation of unit to be controlled using a wall switch, photocell, or other switching mechanism



## MOUNTING

- Universal knockout pattern on back plate for wall mount
- Threaded opening at the top of the enclosure for conduit mount


## HOUSING

- Decorative, low profile, architectural design
- Die-cast aluminum housing
- Durable powder-coated finishes in white, black, nickel, and dark bronze finish
- Sealed and gasketed

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for wet locations (0°C-50°C)

## DIMENSIONS

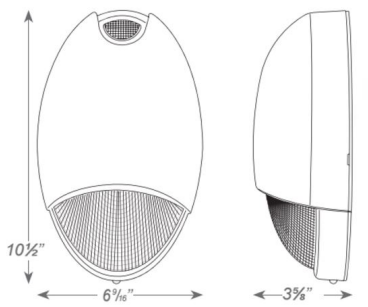

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: DBEL-ACEM-HL W SDT PC

**DBEL-ACEM-HL**

1. MODEL	2. HOUSING COLOR	3. DIAGNOSTICS (STANDARD)	4. WEATHER (O) <sup>1</sup>	5. LISTING (O) <sup>1</sup>	5. PHOTOCELL (STANDARD)
<b>DBEL-ACEM-HL</b>	<b>W</b> White <b>B</b> Black <b>BR</b> Dark Bronze <b>N</b> Nickel	<b>SDT</b> Self-Diagnostics	<b>CW</b> Cold Weather	<b>CEC</b> Title 20 Compliant	<b>PC</b> Photocell Sensor

**Notes:**

<sup>1</sup>(O) is optional

Dimensions and specifications subject to change without notice.

