



JOB NAME:

CAT#:


TYPE:

APPLICATIONS

Invigorate your space with a crisp, original linear LED cross-fixture system – the Nova Luminaire. Paired with a specially-designed mounting system, this fixture delivers bright, white and energy-efficient illumination for office or retail spaces. Via two staggered tiers of simple L23 luminaires, create an intriguing, contemporary look by either mounting to the ceiling or wall to add beauty and sophistication to any space.


FEATURES & BENEFITS

- Custom colors available for fixture endcaps.
- Surface mount system for smooth ceiling types.
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- $L_{70} > 50000$ hrs.
- Min CRI 80 (90 CRI available)
- 14W emergency battery backup options available
- 5 year warranty

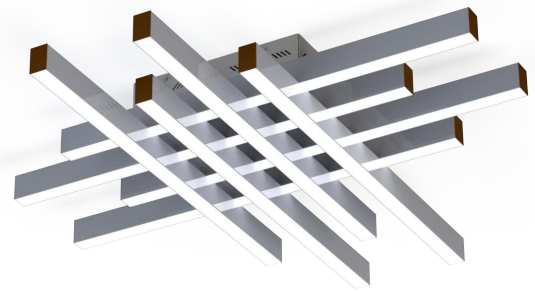


DIMENSIONS

Dimensions in Inches

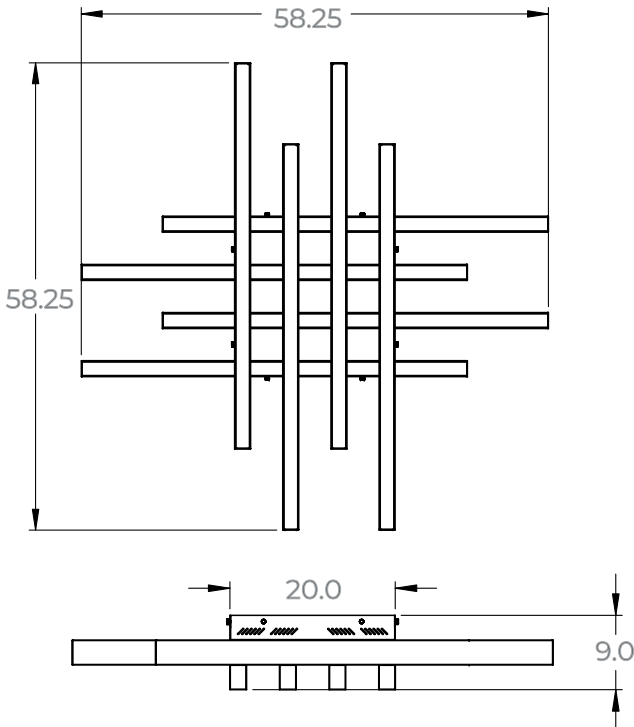

Mounting Bracket

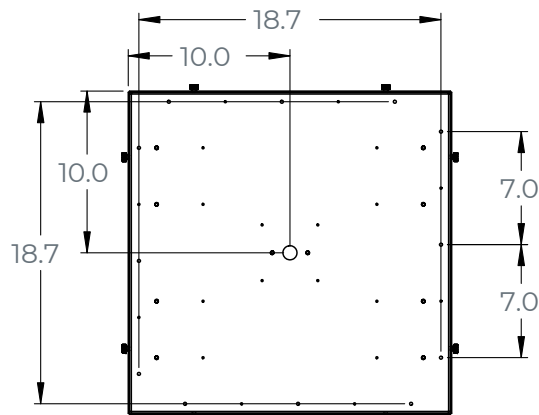

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L23CH S 58X58 LED 160 DMV WH FR 30 BK EM14

L23CH		S		LED						
1. SERIES	2. MOUNTING	3. SIZE		4. GEAR	5. WATTAGE/LUMENS		6. DRIVER		7. FINISH ¹	
L23CH	S Surface	58X58	58x58"	LED	58 in. x 58 in.		DMV	120-277V	BK	Black
					148	148 Watts 17,020 Lumens		Multivolt	SI	Silver
					266	266 Watts 30,590 Lumens		0-10V	WH	White
								Dimmable		

8. LENS		9. CRI		10. COLOR TEMP		11. FLAIR ²		12. EM (O) ⁵	
FR	Frosted Acrylic Lens (85% transmission)	Blank	80	30	3000K	RD	Red	EM14	14W Emergency battery backup ⁵
		9	90	35	3500K	BL	Blue		
				40	4000K	BK	Matte Black		
				50	5000K				

Notes:

¹Consult for custom finish options

²Consult for custom flair options

³EM is remote only

⁴Values shown are total per system, wattage and lumen totals based on values from individual fixtures. Minimum fixture wattage of 160W, maximum fixture wattage of 288W

⁵(O) is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



JOB NAME:

CAT#:

TYPE:


FLAIR BRACKET COLORS AND FINISHES



Gloss Black
(GB)



Matte Black
(BK)




Matte Silver
(SL)




Statuary Bronze
(BZ)




Glimmer (Iron)
(IR)



Safety Yellow
(YL)



Safety Orange
(OR)



Red
(RD)



Fire Engine Red
(FR)



Blue
(BL)

NOTE: Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.