



JOB NAME:

CAT#:


TYPE:

## APPLICATIONS

### The Fan

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Fan shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this symmetric, radial configuration, The Fan has been engineered with special brackets for popular L23 fixtures. The Fan casts bright, white and energy efficient illumination. Instantly transform the look and feel of your space with these inventive and refreshing fixtures that are suited for applications in need of both up and down lighting as options.

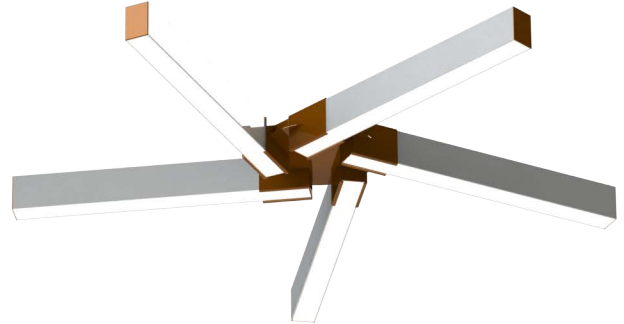





## FEATURES & BENEFITS

- 3 standard bracket configurations – 3, 5, and 6 fixtures
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

## DIMENSIONS

| Part       | D    |
|------------|------|
| PGN23-P51  | 51"  |
| PGN23-P99  | 99"  |
| PGN23-P147 | 147" |

D = Diameter

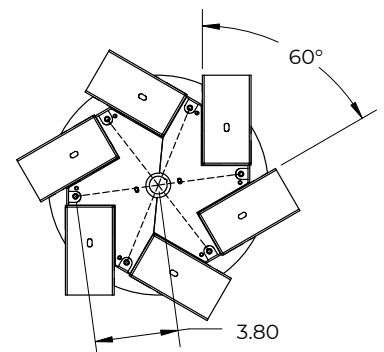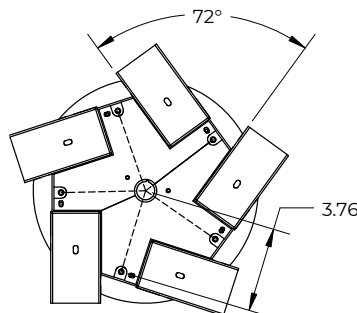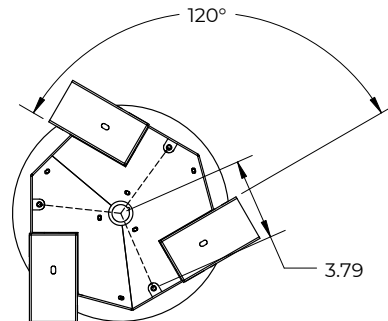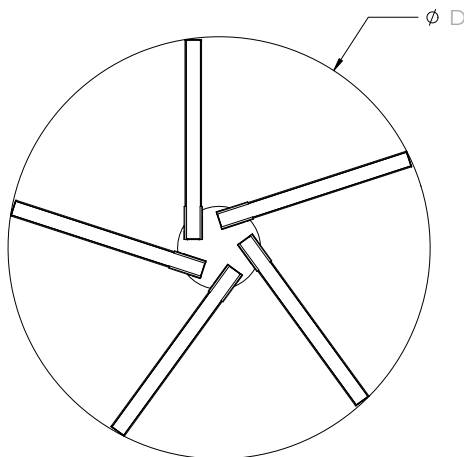

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23 P 51 LED 60 DMV BK FR 30 RD EM14 -F3

### PGN23

### P

### LED

| 1. SERIES                         | 2. MOUNTING                                | 3. DIAMETER <sup>1</sup>     | 4. GEAR                                      | 5. DISTRIBUTION                                      | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 7. DRIVER                                                                                                          |
|-----------------------------------|--------------------------------------------|------------------------------|----------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| PGN23                             | P Pendant                                  | 51 51"<br>99 99"<br>147 147" | LED                                          | Blank Downlight (std.)<br>1U2D Uplight and Downlight | <p><u>Downlight</u><br/><u>51 in.</u></p> <p>60 60 Watts 6900 Lumens(F3)<br/>100 100 Watts 11500 Lumens(F5)<br/>120 120 Watts 13800 Lumens(F6)</p> <p><u>99 in.</u></p> <p>120 120 Watts 13800 Lumens(F3)<br/>200 200 Watts 23000 Lumens(F5)<br/>240 240 Watts 27600 Lumens(F6)</p> <p><u>147 in.</u></p> <p>180 180 Watts 20700 Lumens(F3)<br/>300 300 Watts 34500 Lumens(F5)<br/>360 360 Watts 41400 Lumens(F6)</p> <p><u>1 Up and 2 Down Only</u><br/><u>51 in.</u></p> <p>96 96 Watts 4140U-6900D(F3)<br/>160 160 Watts 6900U-11500D(F5)<br/>192 192 Watts 8280U-13800D(F6)</p> <p><u>99 in.</u></p> <p>192 192 Watts 8280U-13800D(F3)<br/>320 320 Watts 13800U-23000D(F5)<br/>384 384 Watts 16560U-27600D(F6)</p> <p><u>147 in.</u></p> <p>288 288 Watts 12420U-20700D(F3)<br/>480 480 Watts 20700U-34500D(F5)<br/>576 576 Watts 28840U-41400D (F6)</p> | <p>DMV 120-277V Multivolt 0-10V Dimmable</p> <p>DMV11 0-10V Dimming Separate drivers for uplight and downlight</p> |
| 8. FINISH <sup>3</sup>            | 9. LENS                                    | 10. CRI                      | 11. COLOR TEMP                               | 12. FLAIR <sup>4</sup>                               | 13. EM (O) <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 14. CONFIGURATION                                                                                                  |
| BK Black<br>SI Silver<br>WH White | FR Frosted Acrylic Lens (85% transmission) | Blank 80<br>9 90             | 30 3000K<br>35 3500K<br>40 4000K<br>50 5000K | RD Red<br>BL Blue<br>BK Matte Black                  | EM14 14W Emergency Battery Backup <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -F3 3 Fixture Fan<br>-F5 5 Fixture Fan<br>-F6 6 Fixture Fan                                                        |

### Notes:

<sup>1</sup>Fan configurations are measured by an overall system diameter.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)




Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS

### The Triangle

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Triangle shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To design this equilateral triangle configuration, The Triangle has been specifically engineered with special brackets for popular L23 fixtures. The Triangle provides bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.






## FEATURES & BENEFITS

- 4 standard fixture sizes – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

## DIMENSIONS

| Part          | W   | L    | X    | Y   | Z   |
|---------------|-----|------|------|-----|-----|
| PGN23-P30X35  | 30" | 35"  | 31"  | 27" | 16" |
| PGN23-P51X59  | 51" | 59"  | 55"  | 48" | 28" |
| PGN23-P72X83  | 72" | 83"  | 79"  | 69" | 40" |
| PGN23-P93X107 | 93" | 107" | 103" | 90" | 52" |

HANGING KIT ATTACHMENT POINTS

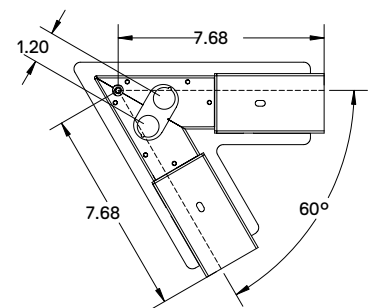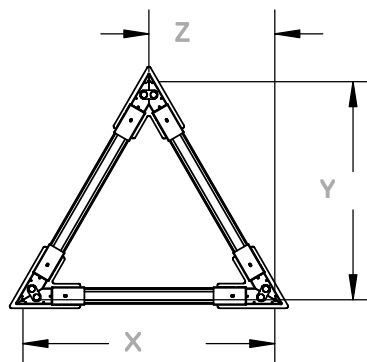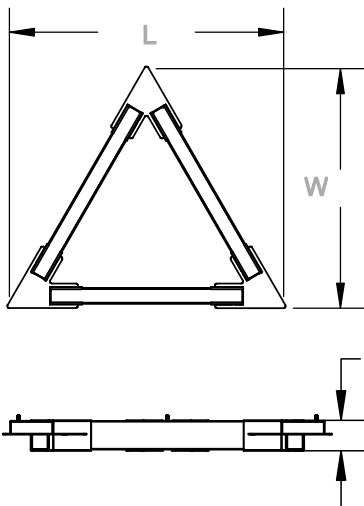

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23-P 51x59 LED 120 DMV BK FR 30 RD EM14 -TR

### PGN23 — P

### LED

| 1. SERIES                                              | 2. MOUNTING                                       | 3. WIDTH X LENGTH <sup>1</sup>                                                                                 | 4. GEAR                                                                  | 5. DISTRIBUTION                                                    | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                        | 7. DRIVER                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>PGN23</b>                                           | <b>P</b> Pendant                                  | <b>30X35</b> 30"W x 35"L<br><b>51X59</b> 51"W x 59"L<br><b>72X83</b> 72"W x 83"L<br><b>93X107</b> 93"W x 107"L | <b>LED</b>                                                               | <b>Blank</b> Downlight (std.)<br><b>1U2D</b> Uplight and Downlight | <b>Downlight</b><br><b>30X35 in.</b><br><b>60</b> 60 Watts 6900 Lumens<br><b>120</b> 120 Watts 13800 Lumens<br><b>180</b> 180 Watts 20700 Lumens<br><b>240</b> 240 Watts 27600 Lumens<br><b>1 Up and 2 Down Only</b><br><b>30X35 in.</b><br><b>96</b> 96 Watts 4140U-6900D<br><b>192</b> 192 Watts 8280U-13800D<br><b>72X83 in.</b><br><b>288</b> 288 Watts 12420U-120700D<br><b>93X107 in.</b><br><b>384</b> 384 Watts 16560U-27600D | <b>DMV</b> 120-277V Multivolt 0-10V Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |
| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                                                                                                        | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                             | 13. EM (O) <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                               | 14. CONFIGURATION                                                                                                         |
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90                                                                                 | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black           | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                 | <b>-TR</b> Triangle                                                                                                       |

#### Notes:

<sup>1</sup>Triangle configurations are measured by an overall system width and length.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:


TYPE:

## APPLICATIONS

### The Square/Rectangle

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Square/Rectangle shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To design square and rectangle configurations, these luminaires have been engineered with special brackets for popular L23 fixtures. The Square/Rectangle provides bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.

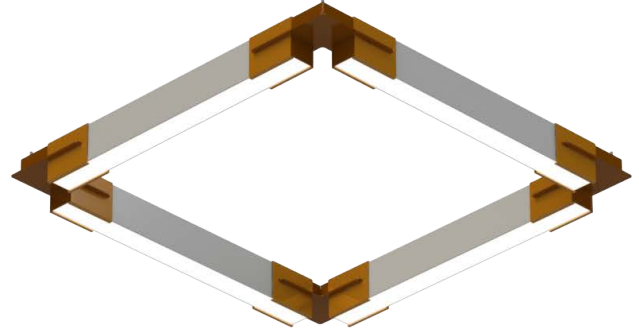


## FEATURES & BENEFITS



- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

## DIMENSIONS

| Part           | W    | L    | X    | Y    |
|----------------|------|------|------|------|
| PGN23-P32X32   | 32"  | 32"  | 29"  | 29"  |
| PGN23-P56X56   | 56"  | 56"  | 53"  | 53"  |
| PGN23-P80X80   | 80"  | 80"  | 77"  | 77"  |
| PGN23-P104X104 | 104" | 104" | 101" | 101" |

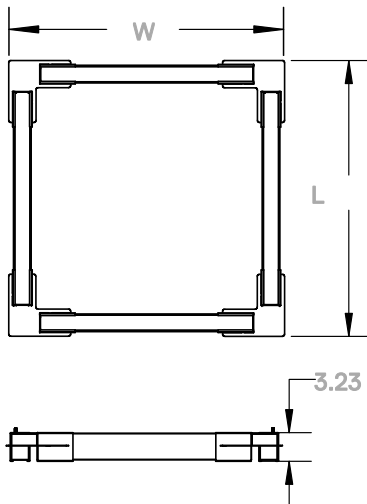

### HANGING KIT ATTACHMENT POINTS

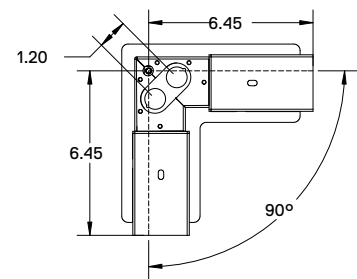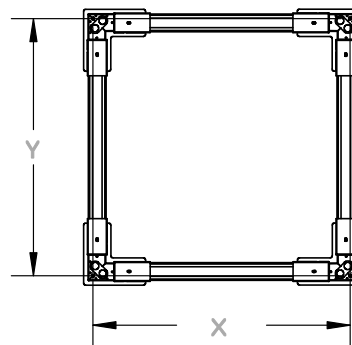

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23-P 80X80 LED 240 DMV BK FR 30 RD EM14 -SQ

### PGN23 — P

### LED

| 1. SERIES    | 2. MOUNTING      | 3. WIDTH X LENGTH <sup>1</sup>                                                                                   | 4. GEAR    | 5. DISTRIBUTION                                                    | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 7. DRIVER                                                                                                                 |
|--------------|------------------|------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>PGN23</b> | <b>P</b> Pendant | <b>32X32</b> 32"W x 32"L<br><b>56X56</b> 56"W x 56"L<br><b>80X80</b> 80"W x 80"L<br><b>104X104</b> 104"W x 104"L | <b>LED</b> | <b>Blank</b> Downlight (std.)<br><b>1U2D</b> Uplight and Downlight | <b>Downlight</b><br><b>32X32 in.</b><br><b>80</b> 80 Watts 9200 Lumens<br><b>55X56 in.</b><br><b>160</b> 160 Watts 18400 Lumens<br><b>80X80 in.</b><br><b>240</b> 240 Watts 27600 Lumens<br><b>104X104 in.</b><br><b>320</b> 320 Watts 36800 Lumens<br><b>1 Up and 2 Down Only</b><br><b>32X32 in.</b><br><b>128</b> 128 Watts 5520U-9200D<br><b>56X56 in.</b><br><b>256</b> 256 Watts 11040U-18400D<br><b>80X80 in.</b><br><b>384</b> 384 Watts 16560U-27600D<br><b>104X10 in.</b><br><b>512</b> 512 Watts 22080U-36800D | <b>DMV</b> 120-277V Multivolt 0-10V Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |

| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                        | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                   | 13. EM (O) <sup>5</sup>                               | 14. CONFIGURATION                         |
|--------------------------------------------------------|---------------------------------------------------|--------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------|-------------------------------------------|
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90 | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup> | <b>-SQ</b> Square<br><b>-RT</b> Rectangle |

### Notes:

<sup>1</sup>Square/rectangle configurations are measured by an overall system width and length.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS


### The Pentagon

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Pentagon shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this symmetric, 5-sided configuration, The Pentagon has been engineered with special brackets for popular L23 fixtures. The Pentagon casts bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.


## FEATURES & BENEFITS

- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90


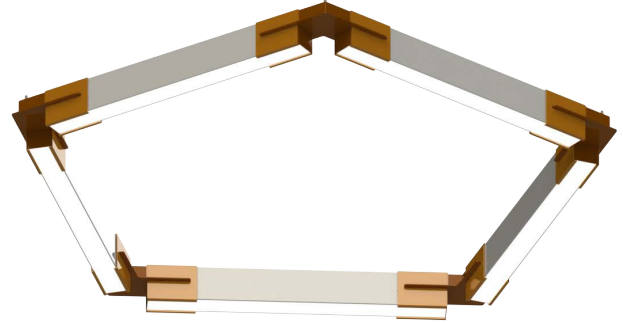


## DIMENSIONS

| Part       | D    | Y <sub>1</sub> | Y <sub>2</sub> | Z <sub>1</sub> | Z <sub>2</sub> |
|------------|------|----------------|----------------|----------------|----------------|
| PGN23-P69  | 57"  | 29"            | 44"            | 9"             | 14"            |
| PGN23-P109 | 92"  | 53"            | 81"            | 16"            | 26"            |
| PGN23-P157 | 133" | 77"            | 118"           | 24"            | 38"            |
| PGN23-P205 | 174" | 101"           | 155"           | 31"            | 50"            |

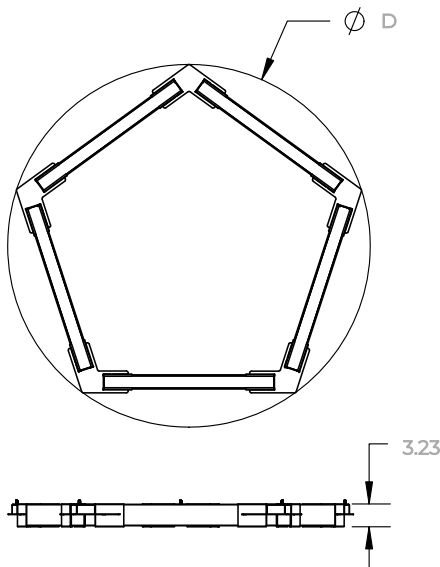

HANGING KIT ATTACHMENT POINTS

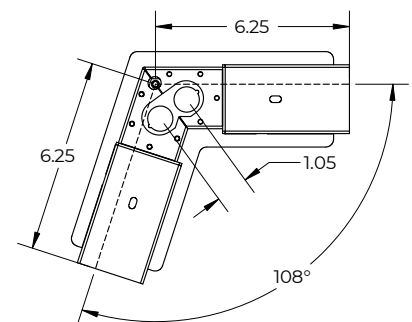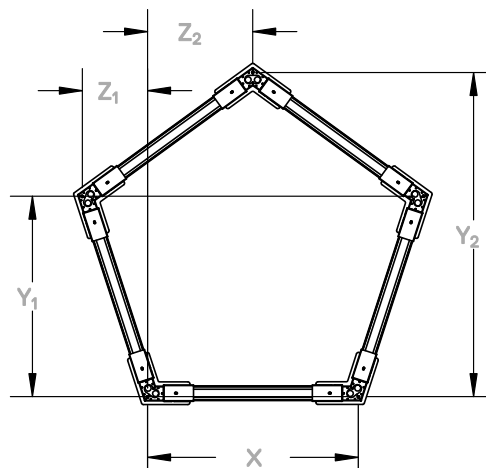

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23-P 92 LED 1U2D 320 DMV BK FR 30 RD EM14 -PT

### PGN23 — P

### LED

| 1. SERIES | 2. MOUNTING | 3. DIAMETER <sup>1</sup>                 | 4. GEAR | 5. DISTRIBUTION                                      | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 7. DRIVER                                                                                                          |
|-----------|-------------|------------------------------------------|---------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| PGN23     | P Pendant   | 57 57"<br>92 92"<br>133 133"<br>174 174" | LED     | Blank Downlight (std.)<br>1U2D Uplight and Downlight | <p><u>Downlight</u><br/><u>57 in.</u><br/>100 100 Watts 11500 Lumens</p> <p><u>92 in.</u><br/>200 200 Watts 23000 Lumens</p> <p><u>133 in.</u><br/>300 300 Watts 34500 Lumens</p> <p><u>174 in.</u><br/>400 400 Watts 46000 Lumens</p> <p><u>1 Up and 2 Down Only</u><br/><u>57 in.</u><br/>160 160 Watts 6900U-11500D</p> <p><u>92 in.</u><br/>320 320 Watts 13800U-23000D</p> <p><u>133 in.</u><br/>480 480 Watts 20700U-34500D</p> <p><u>174 in.</u><br/>640 640 Watts 27600U-46000D</p> | <p>DMV 120-277V Multivolt 0-10V Dimmable</p> <p>DMV11 0-10V Dimming Separate drivers for uplight and downlight</p> |

| 8. FINISH <sup>3</sup>            | 9. LENS                                    | 10. CRI          | 11. COLOR TEMP                               | 12. FLAIR <sup>4</sup>              | 13. EM (O) <sup>5</sup>                        | 14. CONFIGURATION |
|-----------------------------------|--------------------------------------------|------------------|----------------------------------------------|-------------------------------------|------------------------------------------------|-------------------|
| BK Black<br>SI Silver<br>WH White | FR Frosted Acrylic Lens (85% transmission) | Blank 80<br>9 90 | 30 3000K<br>35 3500K<br>40 4000K<br>50 5000K | RD Red<br>BL Blue<br>BK Matte Black | EM14 14W Emergency Battery Backup <sup>5</sup> | -PT Pentagon      |

### Notes:

<sup>1</sup>Pentagon configurations are measured by an overall system diameter.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS


### The Hexagon

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Hexagon shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this symmetric, 6-sided configuration, The Hexagon has been engineered with special brackets for popular L23 fixtures. The Hexagon casts bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.


## FEATURES & BENEFITS

- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

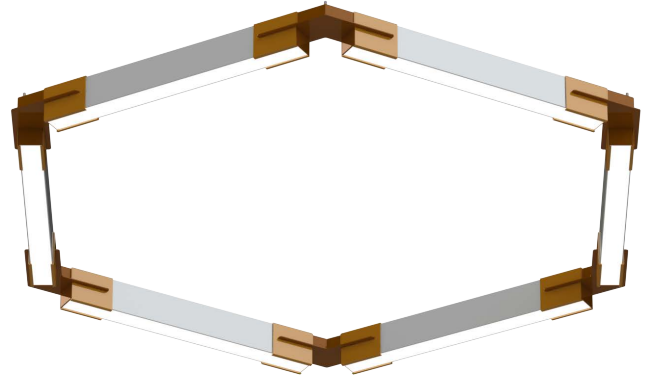

## DIMENSIONS

| Part       | D    | X    | Y   | Z   |
|------------|------|------|-----|-----|
| PGN23-P69  | 69"  | 29"  | 25" | 15" |
| PGN23-P109 | 109" | 53"  | 46" | 27" |
| PGN23-P157 | 157" | 77"  | 67" | 39" |
| PGN23-P205 | 205" | 101" | 88" | 51" |

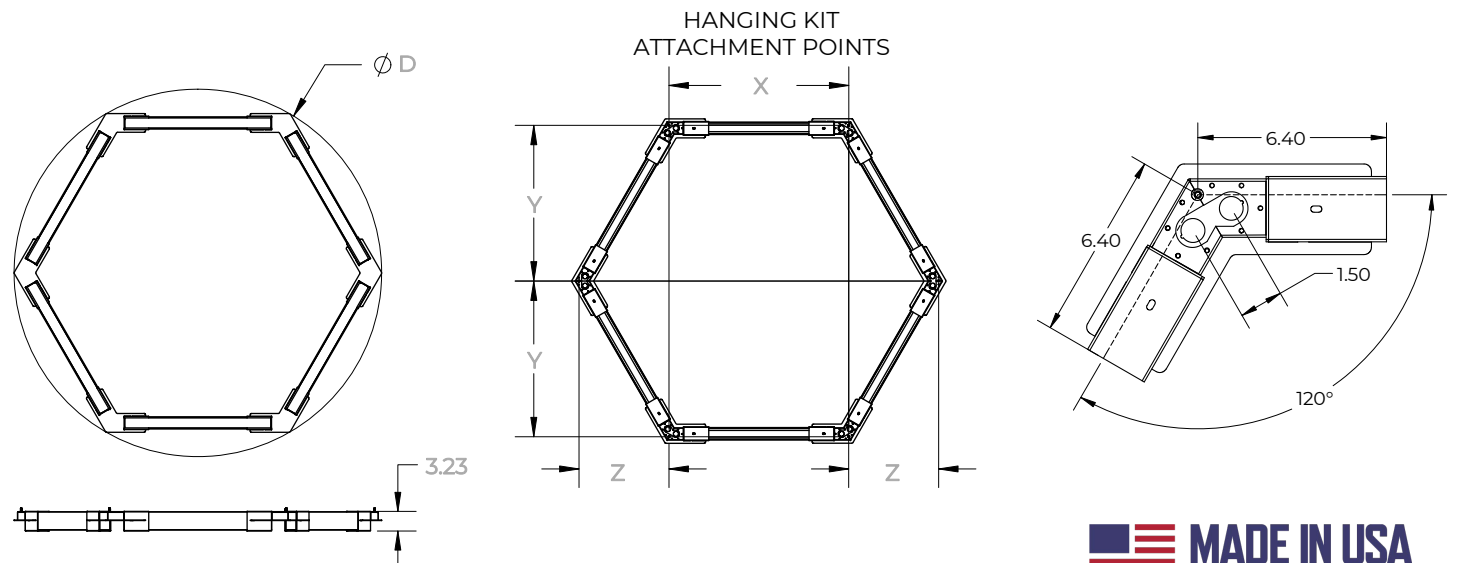

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23 P 157 LED 360 DMV BK FR 30 RD EM14 -HX

### PGN23

### P

### LED

| 1. SERIES | 2. MOUNTING | 3. DIAMETER <sup>1</sup>                   | 4. GEAR | 5. DISTRIBUTION                                      | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 7. DRIVER                                                                                                                 |
|-----------|-------------|--------------------------------------------|---------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| PGN23     | P Pendant   | 69 69"<br>109 109"<br>157 157"<br>205 205" | LED     | Blank Downlight (std.)<br>1U2D Uplight and Downlight | <u>Downlight</u><br><u>69 in.</u><br><b>120</b> 120 Watts 13800 Lumens<br><u>109 in.</u><br><b>240</b> 240 Watts 27600 Lumens<br><u>157 in.</u><br><b>360</b> 360 Watts 41400 Lumens<br><u>205 in.</u><br><b>480</b> 400 Watts 55200 Lumens<br><br><u>1 Up and 2 Down Only</u><br><u>69 in.</u><br><b>192</b> 192 Watts 8280U-13800D<br><u>109 in.</u><br><b>384</b> 384 Watts 16560U-27600D<br><u>157 in.</u><br><b>576</b> 576 Watts 24840U-41400D<br><u>205 in.</u><br><b>768</b> 768 Watts 33120U-55200D | <b>DMV</b> 122-277V 0-10V Multivolt Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |

| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                        | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                   | 13. EM (O) <sup>6</sup>                               | 14. CONFIGURATION  |
|--------------------------------------------------------|---------------------------------------------------|--------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------|--------------------|
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90 | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup> | <b>-HX</b> Hexagon |

### Notes:

<sup>1</sup>Hexagon configurations are measured by an overall system diameter.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)




Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS


### The Octagon

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Octagon shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this symmetric, 8-sided configuration, The Octagon has been engineered with special brackets for popular L23 fixtures. The Octagon casts bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.

## FEATURES & BENEFITS




- 4 standard fixture sizes – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

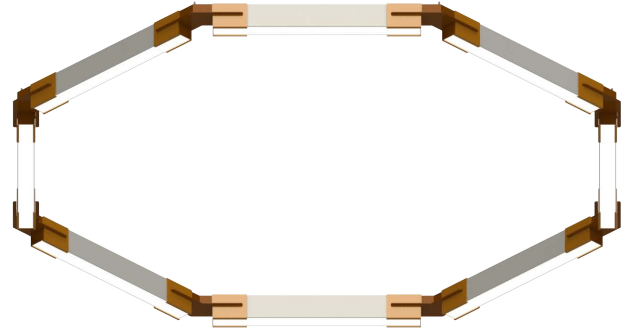

## DIMENSIONS

| Part       | D    | X    | Y   | Z   |
|------------|------|------|-----|-----|
| PGN23-P69  | 77"  | 28"  | 20" | 20" |
| PGN23-P109 | 203" | 52"  | 37" | 37" |
| PGN23-P157 | 223" | 76"  | 54" | 54" |
| PGN23-P205 | 265" | 100" | 71" | 71" |

## HANGING KIT ATTACHMENT POINTS

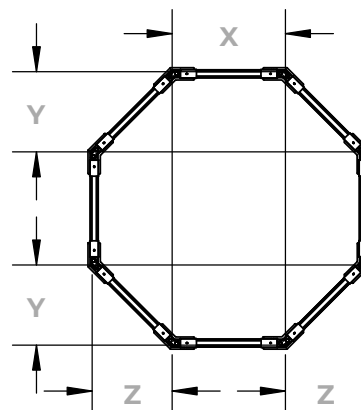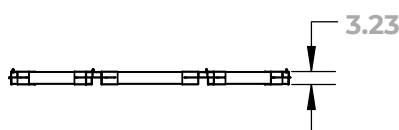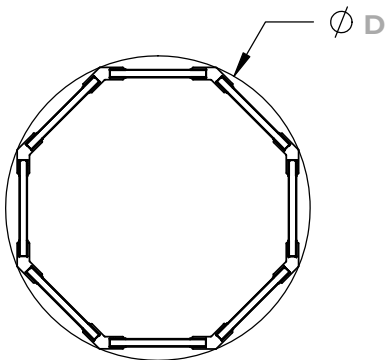

Dimensions and specifications subject to change without notice.







JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23 P 223 LED 480 DMV BK FR 30 RD EM14-OT

### PGN23

### P

### LED

| 1. SERIES                         | 2. MOUNTING                                | 3. DIAMETER <sup>1</sup>                   | 4. GEAR                                      | 5. DISTRIBUTION                                      | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 7. DRIVER                                                                                                          |
|-----------------------------------|--------------------------------------------|--------------------------------------------|----------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| PGN23                             | P Pendant                                  | 77 77"<br>203 203"<br>223 223"<br>265 265" | LED                                          | Blank Downlight (std.)<br>1U2D Uplight and Downlight | <p><u>Downlight</u><br/><u>77 in.</u></p> <p>160 160 Watts 18400 Lumens<br/><u>203 in.</u><br/>320 320 Watts 36800 Lumens<br/><u>223 in.</u><br/>480 480 Watts 55200 Lumens<br/><u>265 in.</u><br/>640 640 Watts 73600 Lumens</p> <p><u>1 Up and 2 Down Only</u><br/><u>77 in.</u></p> <p>256 256 Watts 11040U-18400D<br/><u>203 in.</u><br/>512 512 Watts 22080U-36800D<br/><u>223 in.</u><br/>768 768 Watts 33120U-55200D<br/><u>265 in.</u><br/>1024 1024 Watts 44160U-73600D</p> | <p>DMV 120-277V Multivolt 0-10V Dimmable</p> <p>DMV11 0-10V Dimming Separate drivers for uplight and downlight</p> |
| 8. FINISH <sup>3</sup>            | 9. LENS                                    | 10. CRI                                    | 11. COLOR TEMP                               | 12. FLAIR <sup>4</sup>                               | 13. EM (O) <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 14. CONFIGURATION                                                                                                  |
| BK Black<br>SI Silver<br>WH White | FR Frosted Acrylic Lens (85% transmission) | Blank 80<br>9 90                           | 30 3000K<br>35 3500K<br>40 4000K<br>50 5000K | RD Red<br>BL Blue<br>BK Matte Black                  | EM14 14W Emergency Battery Backup <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                       | -F3 3 Fixture Fan<br>-F5 5 Fixture Fan<br>-F6 6 Fixture Fan                                                        |

### Notes:

<sup>1</sup>Octagon configurations are measured by an overall system diameter.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first. Two power drops required when 96" fixtures are used.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)




Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS

### The Parallel

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Parallel configuration shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

The Parallel fixtures have been engineered with special brackets for linear parallel configurations of popular L23 fixtures. The Parallel provides bright, white and energy efficient illumination with uplight and downlight options. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.




## FEATURES & BENEFITS

- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

## DIMENSIONS

| Part         | W  | L    |
|--------------|----|------|
| PGN23-P9X29  | 9" | 29"  |
| PGN23-P9X53  | 9" | 53"  |
| PGN23-P9X77  | 9" | 77"  |
| PGN23-P9X101 | 9" | 101" |

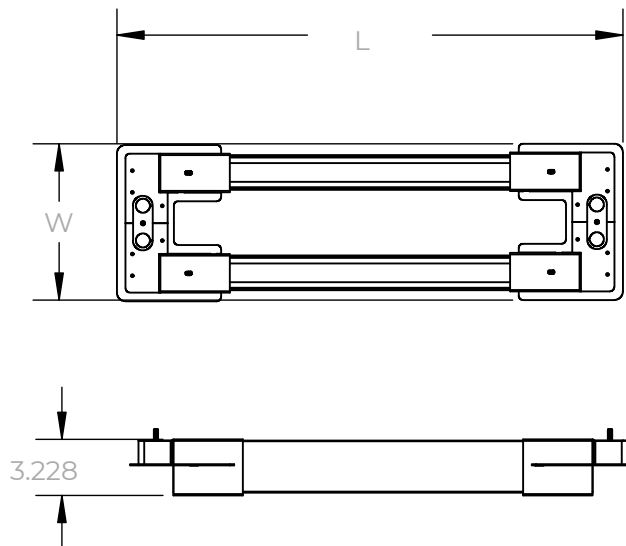

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23-P 9X29 LED 40 DMV BK FR 30 RD EM14 -P

### PGN23 — P

### LED

| 1. SERIES                                              | 2. MOUNTING                                       | 3. WIDTH X LENGTH <sup>1</sup>                                                                         | 4. GEAR                                                                  | 5. DISTRIBUTION                                                    | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                          | 7. DRIVER                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>PGN23</b>                                           | <b>P</b> Pendant                                  | <b>9X29</b> 9"W x 29"L<br><b>9X53</b> 9"W x 53"L<br><b>9X77</b> 9"W x 77"L<br><b>9X101</b> 9"W x 101"L | <b>LED</b>                                                               | <b>Blank</b> Downlight (std.)<br><b>1U2D</b> Uplight and Downlight | <b>Downlight</b><br><b>32X32 in.</b><br><b>40</b> 40 Watts 9200 Lumens<br><b>80</b> 80 Watts 18400 Lumens<br><b>120</b> 120 Watts 27600 Lumens<br><b>160</b> 160 Watts 36800 Lumens<br><b>1 Up and 2 Down Only</b><br><b>32X32 in.</b><br><b>64</b> 64 Watts 2760U-4600D<br><b>128</b> 128 Watts 5520U-9200D<br><b>192</b> 192 Watts 8280U-13800D<br><b>256</b> 256 Watts 11040U-18400D | <b>DMV</b> 120-277V Multivolt 0-10V Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |
| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                                                                                                | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                             | 13. EM (O) <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                 | 14. CONFIGURATION                                                                                                         |
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90                                                                         | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black           | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup>                                                                                                                                                                                                                                                                                                                                   | <b>-P</b> Parallel                                                                                                        |

#### Notes:

<sup>1</sup>Parallel configurations are measured by an overall system width and length.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:

## APPLICATIONS


### The Wall Wash

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Wall Wash shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this 2-angled configuration, The Wall Wash has been engineered with special brackets for popular L23 fixtures. It casts bright, white and energy efficient illumination. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.


### FEATURES & BENEFITS

- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

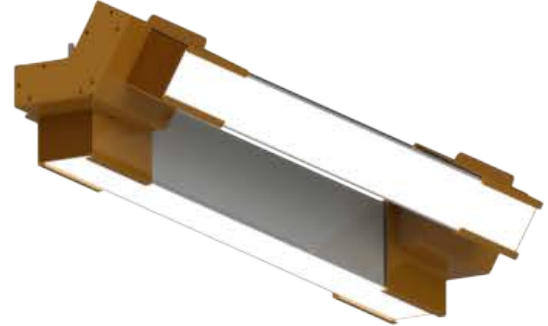


## DIMENSIONS

| Part           | W  | L   | L <sub>H</sub> |
|----------------|----|-----|----------------|
| PGN23-P32X32   | 6" | 27" | 26"            |
| PGN23-P56X56   | 6" | 51" | 50"            |
| PGN23-P80X80   | 6" | 75" | 74"            |
| PGN23-P104X104 | 6" | 99" | 98"            |



Consult factory for different angle options.

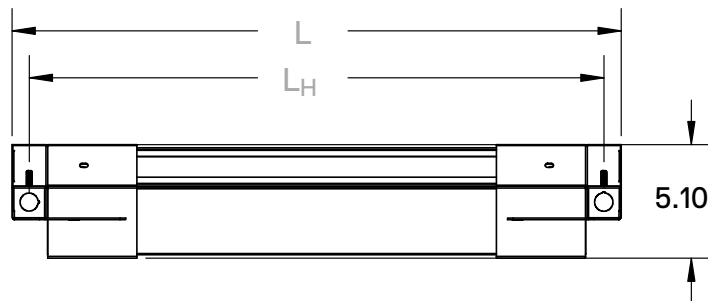

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23-P 6X27 LED 40 DMV BK FR 30 RD EM14 -WW

### PGN23 — P

### LED

| 1. SERIES                                              | 2. MOUNTING                                       | 3. WIDTH X LENGTH <sup>1</sup>                                                                       | 4. GEAR                                                                  | 5. DISTRIBUTION                                                    | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 7. DRIVER                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>PGN23</b>                                           | <b>P</b> Pendant                                  | <b>6X27</b> 6"W x 27"L<br><b>6X51</b> 6"W x 51"L<br><b>6X75</b> 6"W x 75"L<br><b>6X99</b> 6"W x 99"L | <b>LED</b>                                                               | <b>Blank</b> Downlight (std.)<br><b>1U2D</b> Uplight and Downlight | <b>Downlight</b><br><b>32X32 in.</b><br><b>40</b> 40 Watts 9200 Lumens<br><b>55X56 in.</b><br><b>80</b> 80 Watts 18400 Lumens<br><b>80X80 in.</b><br><b>120</b> 120 Watts 27600 Lumens<br><b>104X104 in.</b><br><b>160</b> 160 Watts 36800 Lumens<br><b>1 Up and 2 Down Only</b><br><b>32X32 in.</b><br><b>52</b> 64 Watts 1380U-4600D<br><b>56X56 in.</b><br><b>104</b> 128 Watts 2760U-9200D<br><b>80X80 in.</b><br><b>156</b> 192 Watts 4140U-13800D<br><b>104X10 in.</b><br><b>208</b> 256 Watts 5520U-18400D | <b>DMV</b> 120-277V Multivolt 0-10V Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |
| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                                                                                              | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                             | 13. EM (O) <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 14. CONFIGURATION                                                                                                         |
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90                                                                       | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black           | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>-WW</b> Wall Wash                                                                                                      |

#### Notes:

<sup>1</sup>Wall wash configurations are measured by an overall system width and length.

<sup>2</sup>Wattage and lumen values are total for the system. Uplight available on vertical fixture only. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)



Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## APPLICATIONS


### The Cross

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including The Cross shown here. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.

To achieve this X-shaped configuration, The Cross has been engineered with special brackets for popular L23 fixtures. The Cross casts bright, white and energy efficient illumination.. Instantly transform the look and feel of your space with these inventive and refreshing fixtures.


### FEATURES & BENEFITS

- 4 standard fixture lengths – 24" , 48" , 72" , and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

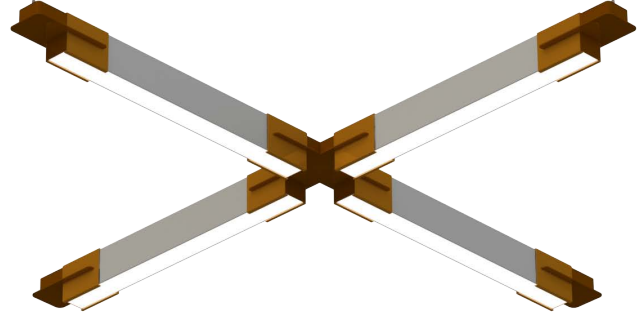

## DIMENSIONS

| Part           | W    | L    |
|----------------|------|------|
| PGN23-P60X60   | 60"  | 60"  |
| PGN23-P108X108 | 108" | 108" |
| PGN23-P156X156 | 156" | 156" |
| PGN23-P204X204 | 204" | 204" |

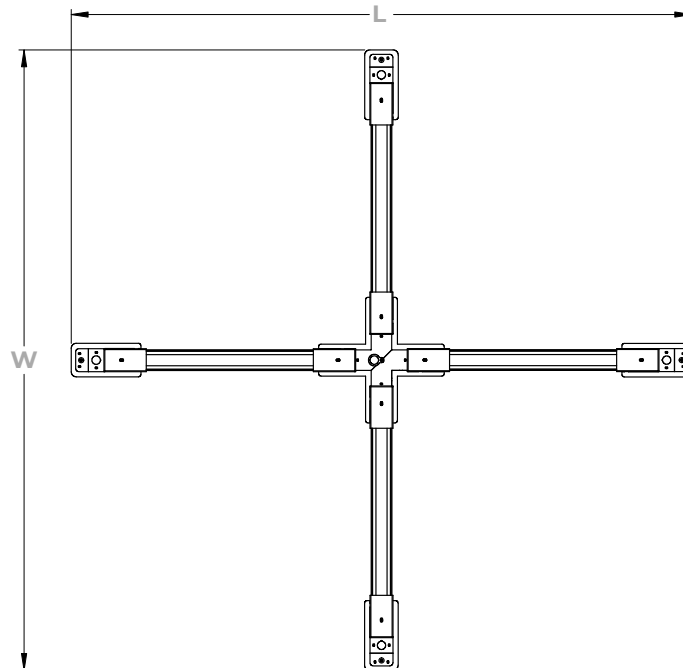

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

## ORDERING

EXAMPLE: PGN23 P 60X60 LED 240 DMV BK FR 30 RD EM14 -CR

### PGN23

### P

### LED

| 1. SERIES    | 2. MOUNTING      | 3. WIDTH X LENGTH <sup>1</sup>                                                                                           | 4. GEAR    | 5. DISTRIBUTION                                                    | 6. WATTAGE/LUMENS <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 7. DRIVER                                                                                                                 |
|--------------|------------------|--------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>PGN23</b> | <b>P</b> Pendant | <b>60X60</b> 60"W x 60"L<br><b>108X108</b> 108"W x 108"L<br><b>156X156</b> 156"W x 156"L<br><b>204X204</b> 204"W x 204"L | <b>LED</b> | <b>Blank</b> Downlight (std.)<br><b>1U2D</b> Uplight and Downlight | <b>Downlight</b><br><b>60X60 in.</b><br><b>80</b> 80 Watts 9200 Lumens<br><b>108X108 in.</b><br><b>160</b> 160 Watts 18400 Lumens<br><b>156X156 in.</b><br><b>240</b> 240 Watts 27600 Lumens<br><b>204X204 in.</b><br><b>320</b> 320 Watts 36800 Lumens<br><b>1 Up and 2 Down Only</b><br><b>60X60 in.</b><br><b>128</b> 128 Watts 5520U-9200D<br><b>108X108 in.</b><br><b>256</b> 256 Watts 11040U-18400D<br><b>156X156 in.</b><br><b>384</b> 384 Watts 16560U-27600D<br><b>204X204 in.</b><br><b>512</b> 512 Watts 22080U-36800D | <b>DMV</b> 120-277V Multivolt 0-10V Dimmable<br><br><b>DMV11</b> 0-10V Dimming Separate drivers for uplight and downlight |

| 8. FINISH <sup>3</sup>                                 | 9. LENS                                           | 10. CRI                        | 11. COLOR TEMP                                                           | 12. FLAIR <sup>4</sup>                                   | 13. EM (O) <sup>6</sup>                               | 14. CONFIGURATION |
|--------------------------------------------------------|---------------------------------------------------|--------------------------------|--------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------|-------------------|
| <b>BK</b> Black<br><b>SI</b> Silver<br><b>WH</b> White | <b>FR</b> Frosted Acrylic Lens (85% transmission) | <b>Blank</b> 80<br><b>9</b> 90 | <b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>50</b> 5000K | <b>RD</b> Red<br><b>BL</b> Blue<br><b>BK</b> Matte Black | <b>EM14</b> 14W Emergency Battery Backup <sup>5</sup> | <b>-CR</b> Cross  |

### Notes:

<sup>1</sup>Cross configurations are measured by an overall system width and length.

<sup>2</sup>Wattage and lumen values are total for the system. Minimum fixture wattage of 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first.

<sup>3</sup>Consult for custom finish options

<sup>4</sup>Consult for custom flair options

<sup>5</sup>Emergency battery backup is integrated in fixtures 4' and longer, but is not available in fixtures 4' and shorter if uplight and downlight are used.

<sup>6</sup>(O) is optional

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)




Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:


TYPE:

## APPLICATIONS

### Custom

Make a statement in your space with a number of configurations of our PGN23 (polygon 2"x3") series hanging luminaire system, including custom ones of your own making. Whether developing your own custom pattern of L23 fixtures or choosing from multiple standard patterns, the PGN23 series delivers with elegance and distinction.


Custom Polygon Series options are achievable via brackets that can be set to nearly any angle, for almost infinite possibilities adjoining L23 fixtures in creative ways. These fixtures cast uplight and downlight for bright and efficient illumination. Get inventive to make your space your own.

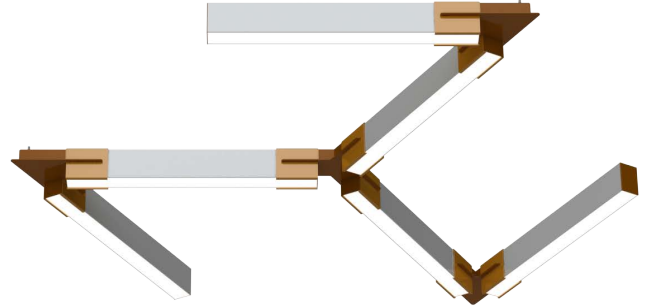

## FEATURES & BENEFITS

- 4 standard fixture sizes – 24", 48", 72", and 96"
- Customizable bracket colors available
- Pendant mount for most ceilings
- Many lumen package / wattage options via programmable drivers
- CRI >80 (90 CRI available)
- >50,000 hrs of L70 LED life
- Power factor >0.90

## BRACKET DIMENSIONS

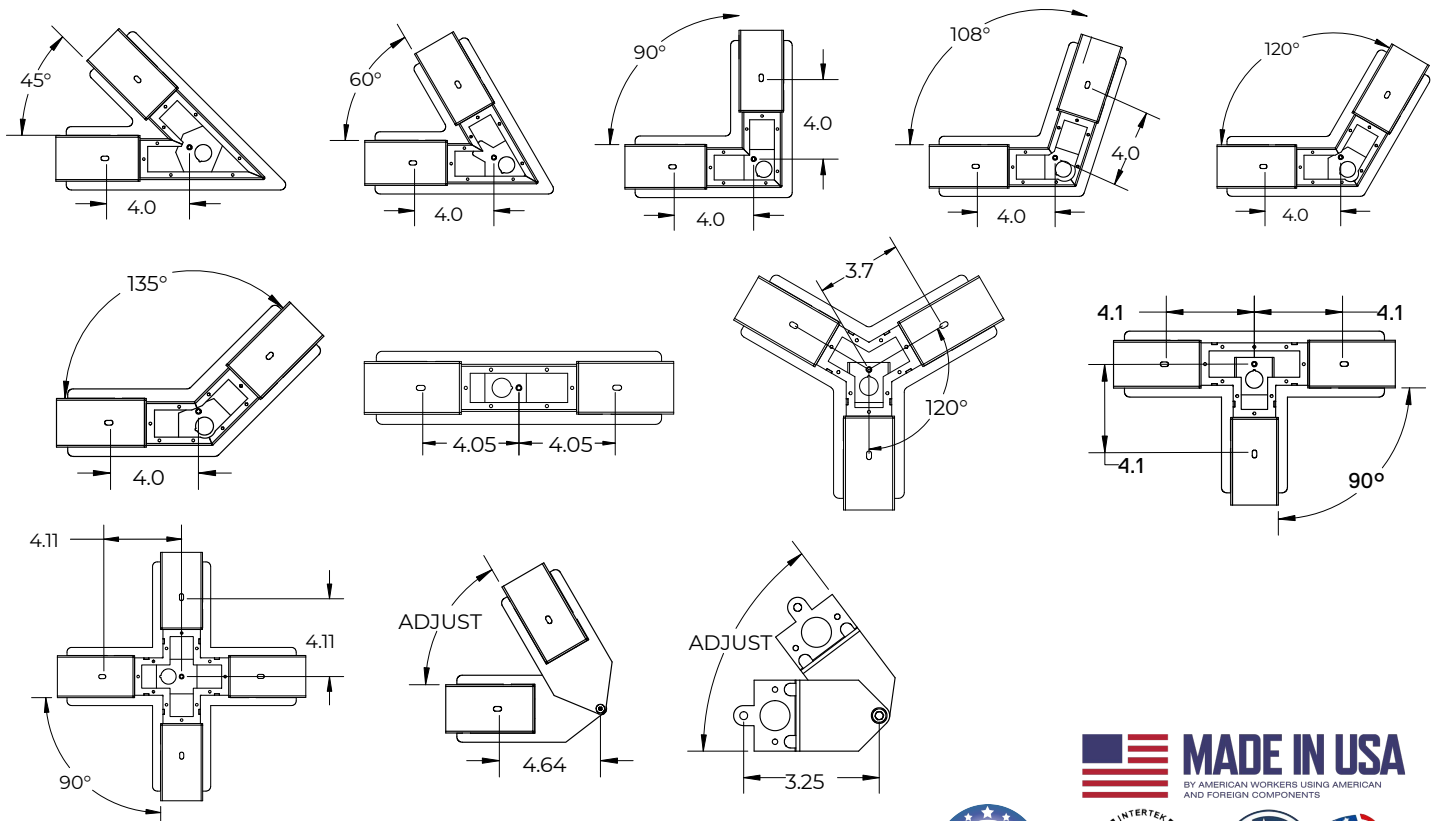

Dimensions and specifications subject to change without notice.






JOB NAME:


CAT#:

TYPE:


## CUSTOM CONFIGURATION PATTERNS

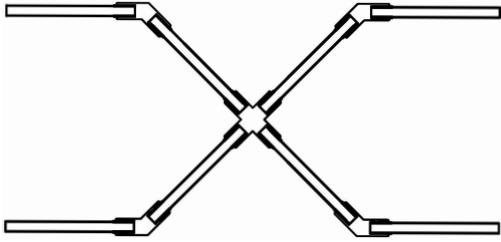


01 - Extend

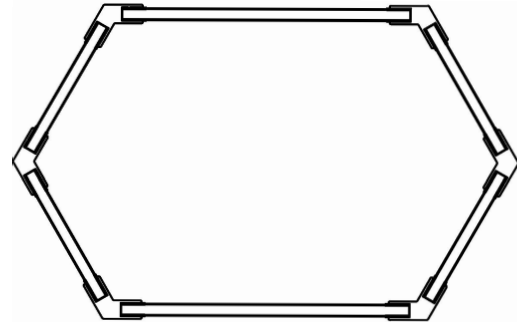

02 - Expanded Hex



03 - Isle

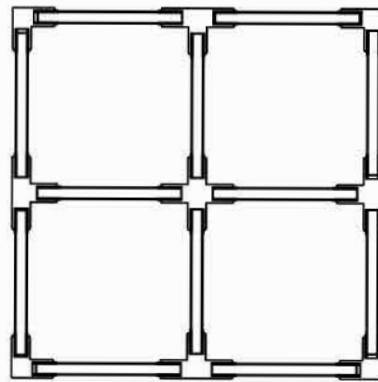

04 - Pane

**\*NOTE:** These patterns represent only a handful of patterns that can be made using the PGN23 system. Contact a Mobern representative for more information about creating your unique pattern.

Dimensions and specifications subject to change without notice.



JOB NAME:

CAT#:

TYPE:


## FLAIR BRACKET COLORS AND FINISHES



Gloss Black  
(GB)




Matte Black  
(BK)




Matte Silver  
(SL)




Statuary Bronze  
(BZ)




Glimmer (Iron)  
(IR)




Safety Yellow  
(YL)



Safety Orange  
(OR)



Red  
(RD)



Fire Engine Red  
(FR)



Blue  
(BL)

**NOTE:** Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory for information on specialty "real wood" finishes.

Dimensions and specifications subject to change without notice.