

**JOB NAME:**
**CAT#:**
**TYPE:**

## ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination
- Double face utilizes factory installed silver or white mylar background panel

## ELECTRICAL

- Dual 120/277 voltage standard
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- Push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



## MOUNTING

- EZ-snap mounting canopy included for top, end, or back mount


## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in silver, white or black finish
- Self-adhesive chevron appliques and guide template provided for directional indication

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-50°C)
- Certified to CEC under Title 20 regulations

## DIMENSIONS

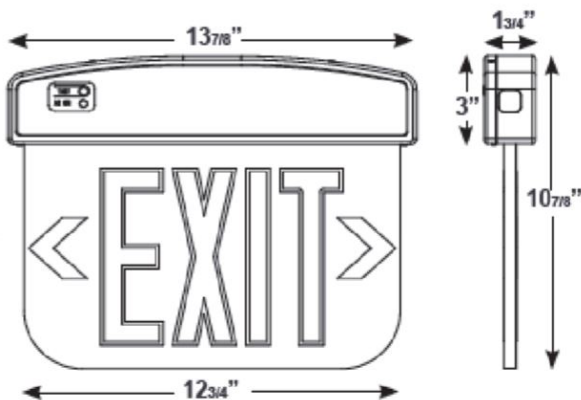

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: PLELRXTEU 2 R W W

**PLELRXTEU**

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. PANEL	5. HOUSING COLOR	6. BATTERY
PLELRXTEU	1	Single Face	<b>R</b> Red	<b>W</b> White	<b>(blank)</b> AC Only
	2	Double Face	<b>G</b> Green	<b>B</b> Black	<b>EM</b> Battery Backup
			<b>M</b> Mirror	<b>A</b> Aluminum	
			<b>W</b> White		

7. DIAGNOSTICS (O) <sup>2</sup>	8. CIRCUITING (O) <sup>2</sup>	9. VOLTAGE (O) <sup>2</sup>	10. WORDING (O) <sup>2</sup>
<b>SDT</b> Self-Diagnostics <sup>3</sup>	<b>2C</b> Dual Circuit Operation <sup>4</sup>	<b>SPV</b> 208/220/240 Volt, 50/60Hz <sup>5</sup>	<b>CUSTOM</b> Custom Wording

**Notes:**

<sup>1</sup>With single face only

<sup>2</sup>(O) is optional

<sup>3</sup>Available only with EM units

<sup>4</sup>Available only with AC units

<sup>5</sup>Not available with SDT

Dimensions and specifications subject to change without notice.

