

JOB NAME:

CAT#:

TYPE:

## APPLICATIONS

Low profile dual basket RDISD is ideal for shallow plenum spaces. Specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment.

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers snap into place with no tools required for removal.




## FEATURES & BENEFITS


- Direct/indirect mimics "sky light" appearance
- Matte white reflective surfaces for soft, uniform light distribution
- For use in recessed inverted T-Bar or grid ceilings
- Every fixture is individually tested
- IC Rated
- 5 Year Warranty
- cETL<sub>us</sub> listed for damp location up to 67 watts

## DIMENSIONS

TOP VIEW 2X2

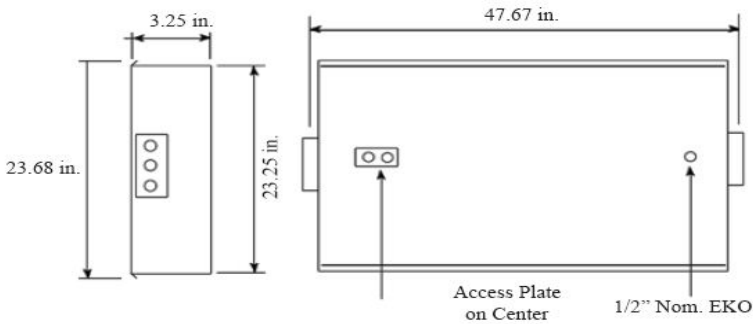

TOP VIEW 2X4

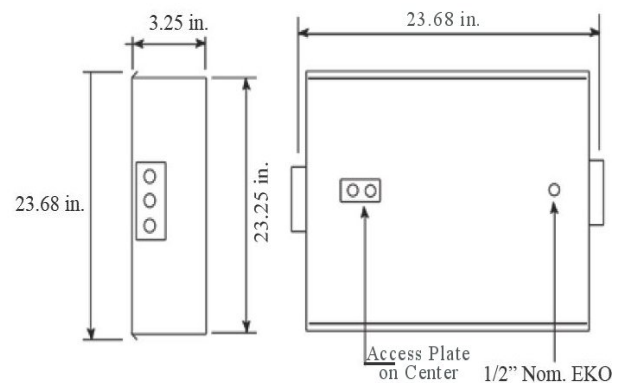

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: RDISD 22 LED 28 DMV FR 30 EM

RDISD		LED														
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS/BASKET	7. COLOR TEMP										
<b>RDISD</b> LED low profile dual basket	<b>14</b> 1x4 Nominal	<b>LED</b>	<b>1x4</b>		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	<b>FR</b> Frosted	<b>30</b> 3000K									
	<b>22</b> 2x2 Nominal		<b>28</b> 28 Watts 3500 Lumens	<b>SDMV</b> Step dimming Multivolt			<b>PR</b> Perforated Basket w/ inlay	<b>35</b> 3500K								
	<b>24</b> 2x4 Nominal		<b>32</b> 32 Watts 4000 Lumens					<b>D347</b> 347VAC 0-10V Dimming	<b>RL</b> Ribbed Linear	<b>40</b> 4000K						
			<b>48</b> 48 Watts 6000 Lumens							<b>50</b> 5000K						
	<b>2x2</b>		<b>57</b> 57 Watts 7125 Lumens							<b>TDMV</b> Triac Dimming 120-277VAC	<b>D120</b> Triac Dimming 120VAC					
			<b>60</b> 60 Watts 7500 Lumens									<b>D277</b> Triac Dimming 277VAC				
			<b>20</b> 20 Watts 2500 Lumens													
			<b>24</b> 24 Watts 3000 Lumens													
			<b>28</b> 28 Watts 3500 Lumens													
			<b>30</b> 30 Watts 3750 Lumens													
	<b>2x4</b>		<b>35</b> 35 Watts 4375 Lumens													
			<b>42</b> 42 Watts 5250 Lumens													
<b>28</b> 28 Watts 3500 Lumens																
<b>32</b> 32 Watts 4000 Lumens																
<b>38</b> 38 Watts 4750 Lumens																
<b>48</b> 48 Watts 6000 Lumens																
	<b>57</b> 57 Watts 7125 Lumens															
	<b>60</b> 60 Watts 7500 Lumens															
	<b>62</b> 62 Watts 7750 Lumens															
	<b>72</b> 72 Watts 9000 Lumens															

8. EMERGENCY(O) <sup>1</sup>		9. CORD(O) <sup>1</sup>	
<b>EM</b>	Emergency Battery Pack 10W ~ 1700 lumens	<b>WP</b>	6' 3 Wire Flexible Conduit
<b>EM5</b>	Emergency Battery Pack 5W ~ 850 Lumens	<b>WP5</b>	6' 5 Wire Flexible Conduit (For EM)
		<b>WPFID</b>	6' 5 Wire Flexible Conduit (For DMFVID)

**Notes:**  
'(O) is optional  
Dimensions and specifications subject to change without notice.

