



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The TVP-LED is designed for locker rooms, bathrooms or any location where high abuse could occur. It's triangular shape creates a pleasing aesthetic while also providing practical protection for your lighting requirements. The back plate is die formed of 16 gauge steel and the lens is attached to the back plate with tamper resistant stainless steel screws. These fixtures accommodate both wall and surface mount applications.



FEATURES & BENEFITS

- Designed for locker room, bathroom or any application where high abuse or vandalism can occur
- Min CRI 80
- Service Life > 60,000 hours
- Input 120-277V AC
- Ambient operating temperature 30C to 50C
- Suitable for damp locations
- 5 year warranty

ORDERING

EXAMPLE: TVP 24 LED 25 DMV CL WH 40 EM

TVP		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. LENS		8. COLOR TEMP	
TVP	24 24" 48 48"	LED	<u>24"</u> 25 25 Watts 2800 Lumens		DMV 0-10V Dimming 120-277VAC Multivolt	CL Clear FR Frosted	WH White	40 4000K		
			<u>48"</u> 50 50 Watts 5600 Lumens					50 5000K		
9. EM										
EM		Emergency Battery Backup								

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.






JOB NAME:

CAT#:


TYPE:

DIMENSIONS & DRAWINGS


BACK VIEW - 2FT

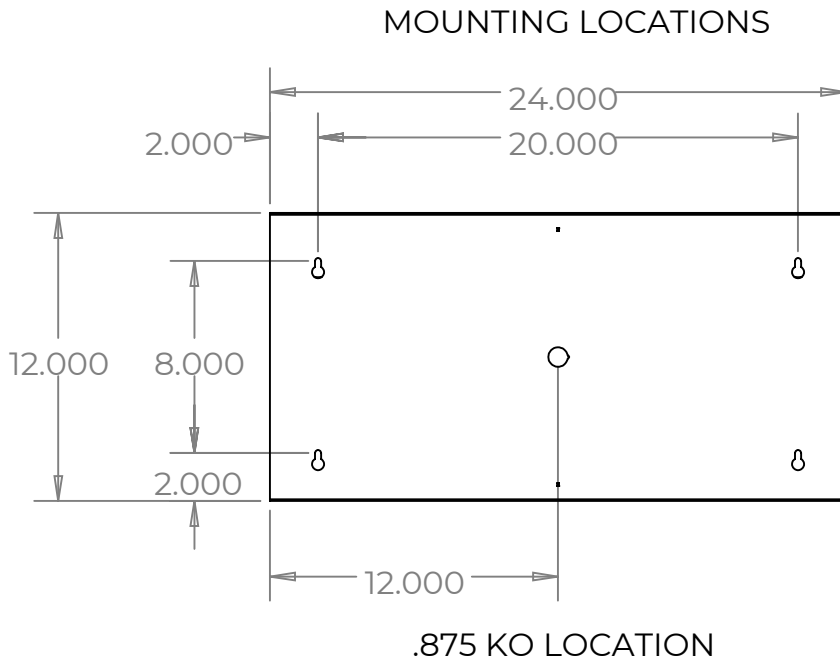

END VIEW

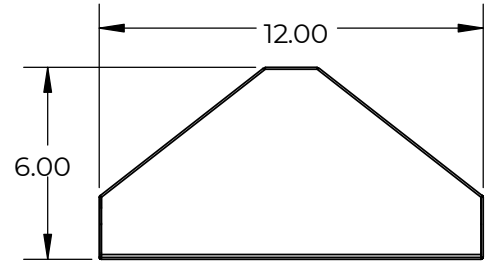

BACK VIEW - 4FT

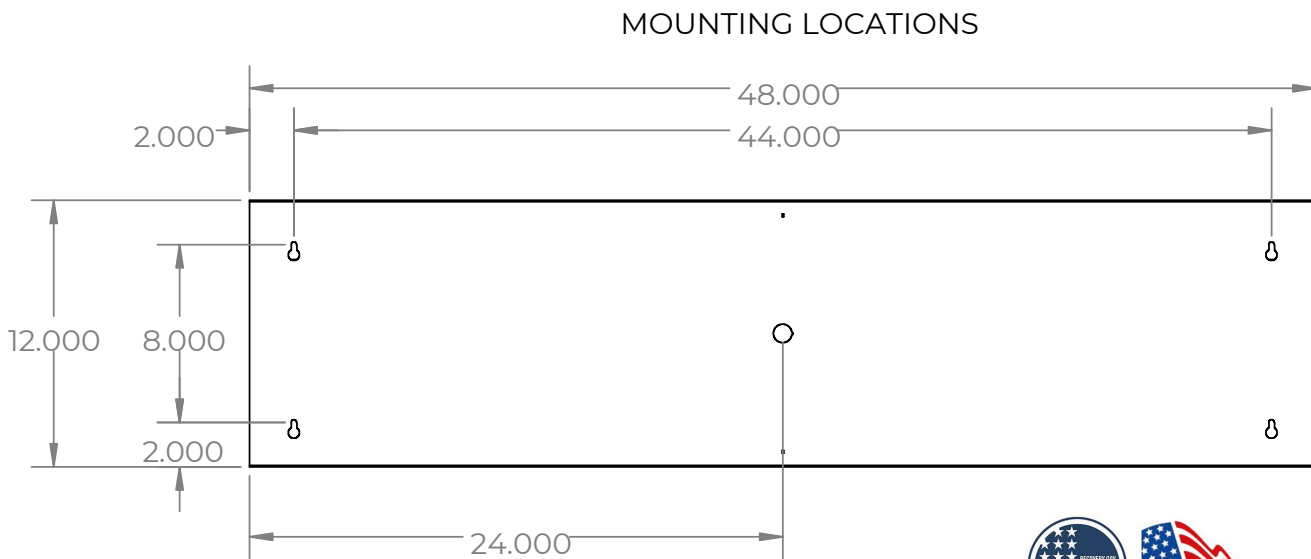





JOB NAME:

CAT#:

TYPE:

PHOTOMETRICS



2FT - TVP24LED25DMVFRWH40

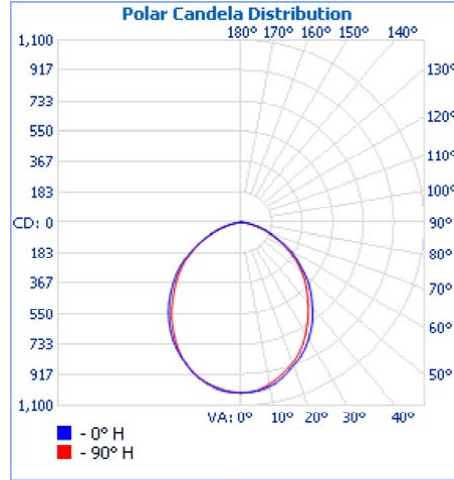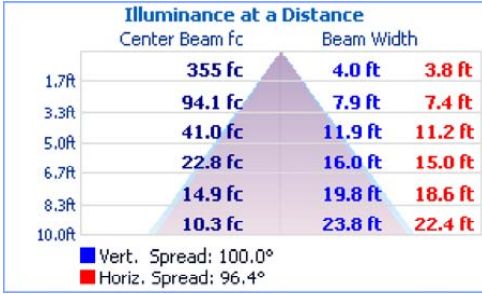

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	765.1	31.6%
0-40	1,220.1	50.4%
0-60	2,034.8	84.1%
60-90	384.7	15.9%
70-100	133.6	5.5%
90-120	0.3	0%
0-90	2,419.5	100%
90-180	0.3	0%
0-180	2,419.8	100%

4FT - TVP48LED50DMVFRWH40

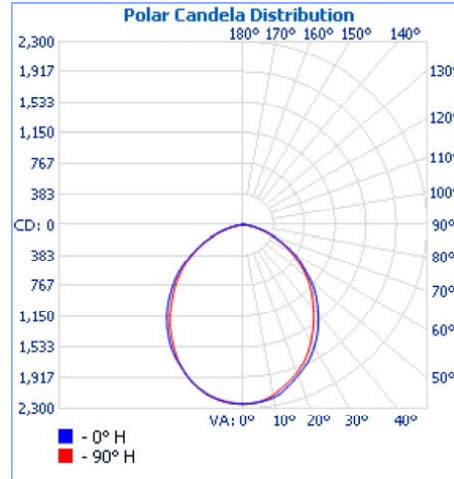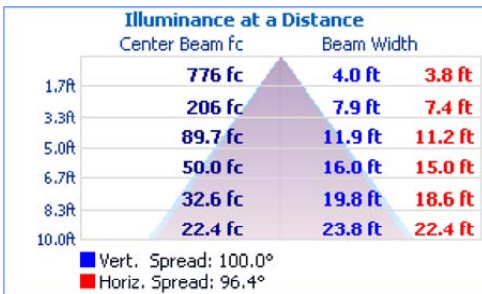

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,674.4	31.6%
0-40	2,670.2	50.4%
0-60	4,453.0	84.1%
60-90	841.9	15.9%
70-100	292.3	5.5%
90-120	0.6	0%
0-90	5,294.9	100%
90-180	0.6	0%
0-180	5,295.6	100%

Dimensions and specifications subject to change without notice.

