



**JOB NAME:**

**CAT#:**

**TYPE:**

### ILLUMINATION

- Ultra bright, energy efficient, long life red or green LEDs

### ELECTRICAL

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only)
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



### MOUNTING

- Polycarbonate mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount


### HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black, or gray finish
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Knockouts provided for conduit feed applications
- EZ snap-out Chevron directional indicators

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for wet locations (0°C-50°C)
- Certified to CEC under Title 20 regulations

### DIMENSIONS

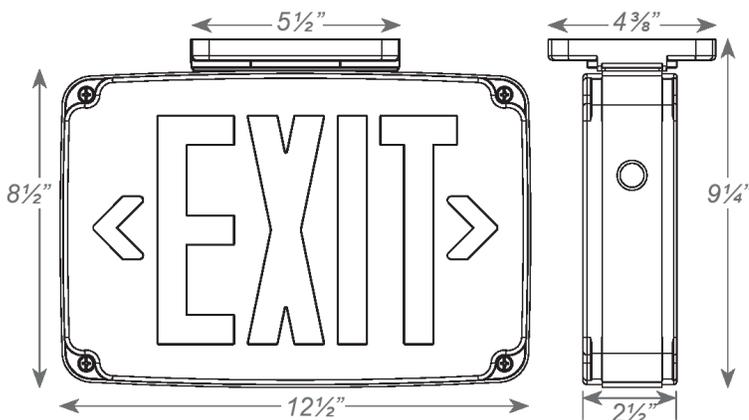

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: WLEZXTEU 2 R W AC 2C

**WLEZXTEU**

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. HOUSING COLOR	5. BATTERY	6. DIAGNOSTICS (O)
WLEZXTEU	1	Single Face	<b>R</b> Red	<b>AC</b> AC Only	<b>SDT</b> Self-Diagnostics <sup>2</sup>
	2	Double Face	<b>G</b> Green	<b>EM-CW</b> Battery Backup (cold weather standard)	
<hr/>					
7. CIRCUITING (O) <sup>1</sup>	8. TAMPERING (O) <sup>1</sup>	9. WORDING (O) <sup>2</sup>			
<b>2C</b> Dual Circuit Operation <sup>3</sup>	<b>TP</b> Tamper-Proof	<b>CUSTOM</b> Custom Wording			

**Notes:**

<sup>1</sup>(O) is optional

<sup>2</sup>Available only with EM units

<sup>3</sup>Available only with AC units

Dimensions and specifications subject to change without notice.

