



Texas Fluorescents
Reinvented

CATALOG# : _____
PROJECT : _____
TYPE : _____

Series S

LED Open Strip (2.75" WIDE)

The S Series is a narrow body LED strip for interior warehouse, retail, and utility areas requiring general illumination. The fixture is designed in a commercial-quality, narrow strip configuration. Recommended for retail and commercial applications, warehouses and utility areas requiring general illumination.

CONSTRUCTION


Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back, side, and end of housing.

MOUNTING

Surface mount, chain hung, double stem.

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup available. Finishes available in standard white, black or silver, plus custom finishes available upon request. Cord sets, whips, wire guards, occupancy sensors. Contact factory for more details.

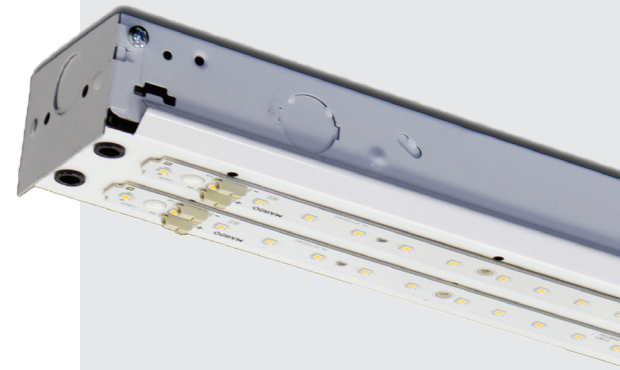

DIMENSIONS

2ft. - 24"L x 2.75"W x 2"H

4ft. - 48"L x 2.75"W x 2"H

8ft. - 96"L x 2.75"W x 2"H

Consult factory for custom length options

FEATURES & BENEFITS

- Fully assembled housing is formed and welded, 22 gauge steel
- Available in white, black or silver standard finishes; consult factory for custom finish options
- Option of smooth frosted lens to maximize light output
- Available in many lumen packages / wattages, through use of programmable drivers
- Multiple Kelvin temperatures; consult factory for RGBW option
- Recommended for retail and commercial applications, warehouses and utility areas requiring general illumination
- Suitable for dry or damp locations
- >50,000 hrs of L70 LED life
- CRI >80
- Power Factor >0.90
- 0-10 Volt dimmable 120-277V (120 ELV/TRIAC avail)
- Emergency battery backup available
- 5 year warranty





Texas Fluorescents
Reinvented

CATALOG# : _____

PROJECT : _____

TYPE : _____

Series S

LED Open Strip (2.75" WIDE)

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENGTH	LENS	WATTAGE* & LUMENS* (w/out Lens)	DRIVER	COLOR & CRI**		
S Open Strip	24L 24"	Blank No Lens FR1 Frosted Acrylic	Y15W	15 Watts, 2500 Lumens	DMV 0-10V Dimming	30K 3000K 80 CRI	
			Y20W	20 Watts, 3250 Lumens			
			Y25W	25 Watts, 4000 Lumens			
			Y33W	33 Watts, 5200 Lumens			
	48L 48"			Y15W	15 Watts, 2500 Lumens	G120 ELV/TRIAC dimming at 120V only (only available with SS sensor)	35K 3500K 80 CRI
				Y20W	20 Watts, 3400 Lumens		
				Y25W	25 Watts, 4250 Lumens		
				Y30W	30 Watts, 5200 Lumens		
				Y35W	35 Watts, 5900 Lumens		
				Y40W	40 Watts, 6650 Lumens		
				Y45W	45 Watts, 7400 Lumens		
				Y50W	50 Watts, 8150 Lumens		
	96L 96"			Y54W	54 Watts, 8550 Lumens	D1MV 0-10V Dimming (dim to 1%)	40K 4000K 80 CRI 50K 5000K 80 CRI
				Y30W	30 Watts, 5000 Lumens		
				Y40W	40 Watts, 6800 Lumens		
				Y50W	50 Watts, 8450 Lumens		
				Y60W	60 Watts, 10350 Lumens		
				Y70W	70 Watts, 11700 Lumens		
				Y80W	80 Watts, 13300 Lumens		
				Y90W	90 Watts, 14800 Lumens		
	Y100W	100 Watts, 16300 Lumens					
	Y108W	108 Watts, 17100 Lumens					

CONSULT FACTORY FOR 90 CRI

Additional Options

FINISH	OPTIONS	ACCESSORIES
WH White	EM 10W Emergency battery backup (remote only)	S48WGWH 4' Wireguard
BK Black	EM14 14W Emergency backup (integral)	HC101 20' Chain Kit with S Hooks
SL Silver	C8 8' 3 wire 18 gauge cord	2SCS24WH Stem kit w/2 stems/2 canopy
	WP 6 ft. 3 wire 18 gauge whip	HC202 End Mount Tong Hanger(pair)
	WP10 6 ft. 4 wire 18 gauge whip	HC203 Side Mount Tong Hanger(pair)
		MDT4 ON/OFF end mount occupancy sensor
		MDD4 Daylight end mount sensor

Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.


**Consult factory for 90CRI 5000K availability.

FR1 - Frosted Lens about 8% light loss.


NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

End View

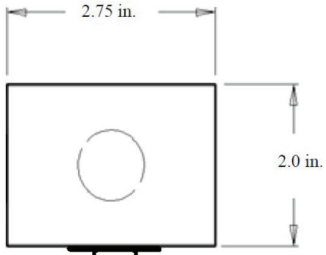

4 FT

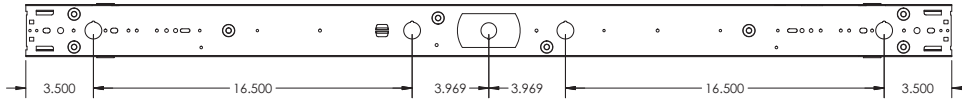

8 FT

