



Texas Fluorescents
Reinvented

CATALOG# : _____
PROJECT : _____
TYPE : _____

Series SLP

LED Low Profile Pendant, Wall, Surface

Saylite introduces LED low profile Direct/Indirect rectilinear Lighting that can be pendant, surface and wall mounted individually. Ideal for general lighting applications in both commercial and residential applications for circulation spaces, high impact areas and kitchen islands and home offices. The versatility and clean styling makes this an ideal choice in many applications.

CONSTRUCTION

Powder coated white aluminum extrusion with white interior and cast aluminum end plates. The diffuser / lens is a smooth frosted acrylic. Available in 4 and 8 foot nominal lengths.

MOUNTING

Pendant Mount, Surface Mount or Wall Mount



DIMENSIONS

4ft- 48.00"L x 7.60"W x 1.90"H
8ft- 96.00"L x 7.60"W x 1.90"H

FEATURES & BENEFITS

- Available in Pendant, Surface and Wall mount
- Low profile 1.90"H
- Exceptionally well into low ceiling environments
- CRI >80
- >50,000 hrs of L70 LED life
- 0-10V Dimming 120-277V
- Power Factor 0.99
- 5 year warranty



ORDER INFORMATION

SERIES	LENS	SIZE	WATTAGE & LUMENS	DRIVER	COLOR	FINISH
SLP Pendant	FR Frosted Lens	48L 48 inch	Down Light Only Y24W2700L 24 Watts 2700 Lumens Y48W5400L 48 Watts 5400 Lumens	DMV 122-277 VAC 0-10V Dimming (dim to 10%)	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White SL Silver RD Red IN Iron BK Black
	MW Matte White					
SLW Wall Mount	MW Matte White	48L 48 inch	Up and Down UY12WD24W Uplight 12 Watts Downlight 24 Watts 3600 Lumens UY18WD36W Uplight 18 Watts Downlight 36 Watts 5400 Lumens	D1MV 120-277VAC 0-10V Dimming (dim to 1%)		
SLF Surface Mount						
		96L 96 inch	Down Light Only Y48W5400L 48 Watts 5400 Lumens Y96W10800L 96 Watts 10800 Lumens			
			Up and Down UY24WD48W Uplight 24 Watts Downlight 48 Watts 7200 Lumens UY36WD72W Uplight 36 Watts Downlight 72 Watts 10800 Lumens			

OPTIONS

- HC4015WWH** Cable kit with 4' cable & 5 wires power feed/cable incl., white cord and white canopy (included power feed and non-power feed)
- HC401WHNPF** Cable kit with 4' cable & white canopy, non power feed (non-power feed only)
- HC4025WWH** Cable kit with 12' cable & 5 wires power feed/cable incl., white cord and white canopy (included power feed and non-power feed)
- HC402WHNPF** Cable kit with 12' cable & white canopy, non power feed (non-power feed only)


*Programmable LED drivers allow custom configured wattages and corresponding lumens.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.


DRAWINGS & IMAGES

4ft - Pendant Mount


BACK VIEW

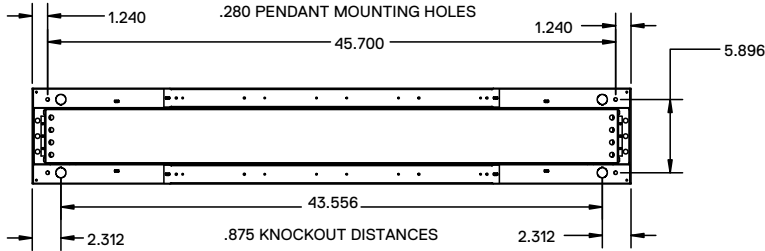

END VIEW

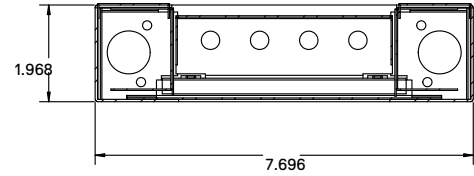


TOP

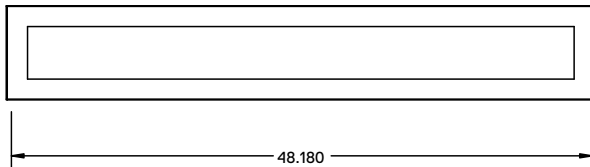


4ft - Surface Mount


BACK VIEW

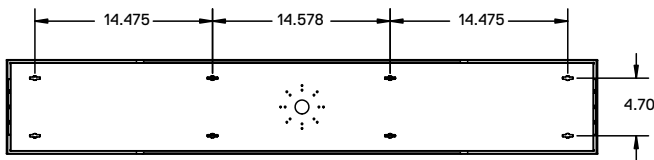

END VIEW

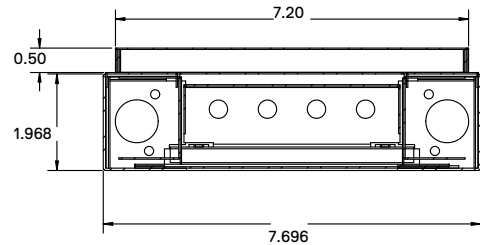


SIDE VIEW

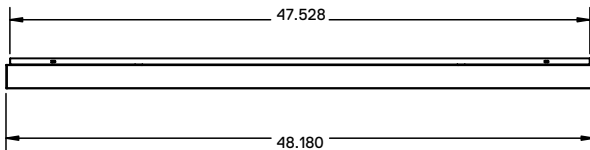


Wall Mount

SIDE VIEW

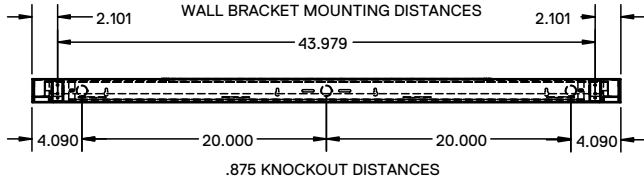

TOP

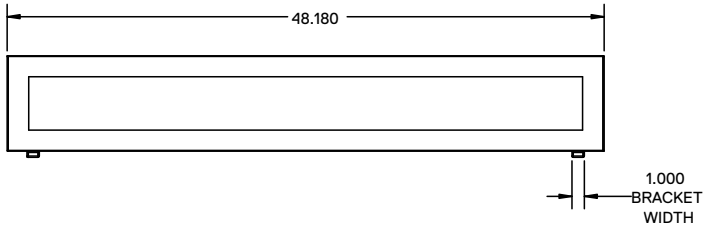

END VIEW

