



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series SSSTW

## LED Stairwell Smart Sense

Specification grade, wall mount with forward throw optics, the SSSTW is a sleek wall mount. This stairwell fixture is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

### CONSTRUCTION

Housing is die-formed and embossed code gauge steel with aluminum end caps. Standard finish is powder coat white. Custom colors available

### MOUNTING

Wall mount

### TYPICAL OPTIONS & ACCESSORIES

Smart Sense(Ultrasonic technology for open area detection and line-o-sight obstructions.), emergency battery backup (for 2ft. housing, remote EM only) and custom colors.



### DIMENSIONS

2ft - 5.613"W x 24"L x 4.5781"Dp  
4ft - 5.613"W x 48.878"L x 4.5781"Dp


### FEATURES & BENEFITS

- Continuous row mounting
- Post painted powder coat finish
- White standard, custom colors available
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty





### DRAWINGS & IMAGES

#### 2 FT

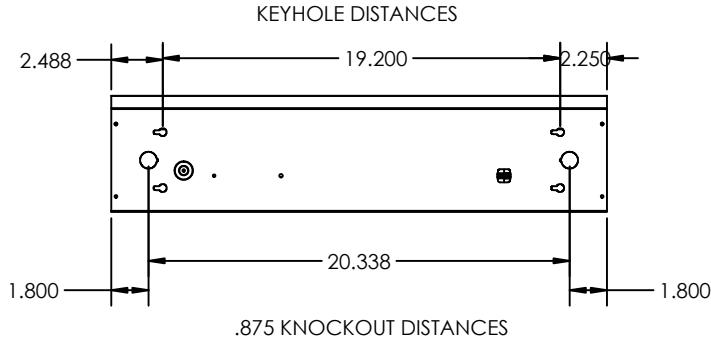

#### 4 FT

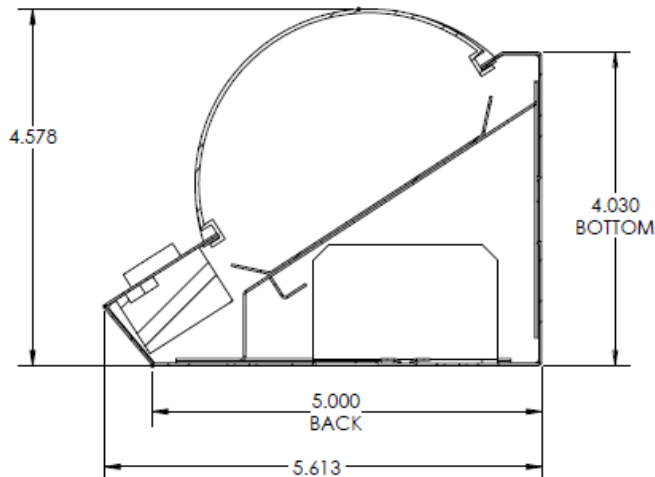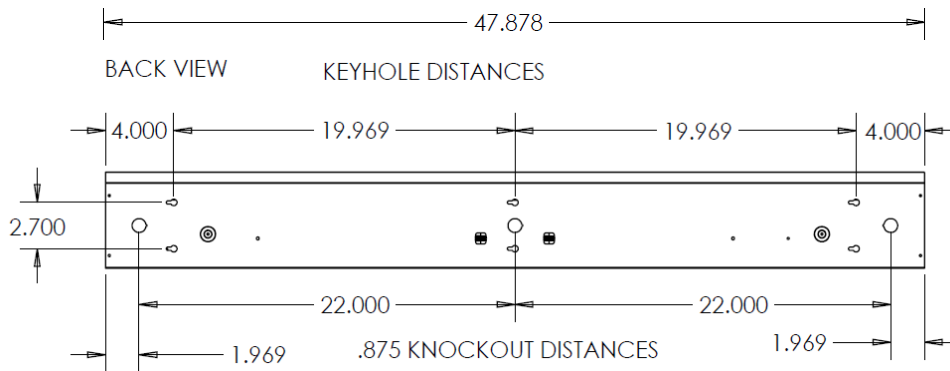

**ORDER INFORMATION**

SENSOR		SERIES	LENS		SIZE		WATTAGE & LUMENS		DRIVER		CCT	
SS	Smart Sensor	STW LED Stairwell	FR	Frosted lens	24L	24"	Y15W2050L	15 Watts 2050 Lumens	DMV	0-10V Dimming Input Voltage 120V - 277V	30K	3000K
							Y24W3000L	24 Watts 3000 Lumens			35K	3500K
					48L	48"	Y48W6000L	48 Watts 6000 Lumens			40K	4000K
							Y57W6900L	57 Watts 6900 Lumens			50K	5000K
							*	*	DMV(XX)*		Input Voltage 120V - 277V	
										* (XX) for Percentage of Light Output when it is not Occupied.		

**VALUE LINE ORDERING INFORMATION**

SENSOR		SERIES	LENS		SIZE		WATTAGE & LUMENS		DRIVER		CCT	
SS	Smart Sensor	STW LED Stairwell	FR	Frosted lens	48L	48"	Y46W5500L	46 Watts 5500 Lumens	DMV (20)*	Input Voltage 120V - 277V	30K	3000K
											35K	3500K
											40K	4000K
											50K	5000K
										* 20% of Light Output when it is not Occupied.		

**ACCESSORIES**

SCP      Sensor Cover Plate

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.  
**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.