



CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# Series WLEZXTEU

## Wet Location LED Exit Sign



### ILLUMINATION

- Ultra-bright, energy efficient, long life Red or Green LED

### ELECTRICAL

- Dual 120-277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

### HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone basket
- Top and side K/Os provided for conduit feed applications
- EZ snap-out chevron directional indicators

### WARRANTY

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

### DIMENSIONS

12 1/2"L x 4 3/8"W x 9 1/4"H

### FEATURES & BENEFITS

- Custom: Signs available with requested 'special' wording
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit
- UL Listed for wet locations (-20°-50°C)

#### STANDARD



#### OPTIONAL



**ORDER INFORMATION**


Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS		
WLEZXTEU	1	Single Face	R Red	W White (with white faceplate)	Blank AC Only	CW Cold Weather (std)	Custom Custom Wording
	2	Double Face	G Green	B Black (with black faceplate)	EM Battery Back-up		TP Tamper-Proof
				G Gray (with white faceplate)			SDT Self-diagnostics <sup>1</sup>
						2C Dual Circuit <sup>2</sup>	

Notes:  
 Special voltage and SALIDA face plate options available. Check with your Saylite representative.

- <sup>1</sup> Available only with EM units
- <sup>2</sup> Available only with AC units

**DRAWINGS**

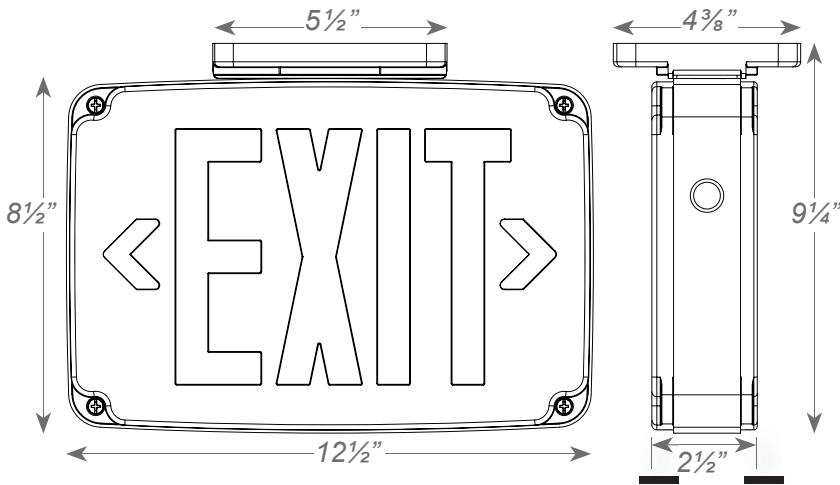

**ELECTRICAL INFORMATION**

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277
WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
WLEZXTEU-RED/GREEN/2C	2.4	2.4	0.023	0.011

Note:  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.