

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# CRSD/CRSF/CRSR

## LED PREMIUM STRIP

Give your area a new clean and sleek look with this LED premium strip. This fixture is sure to enhance any environment. Designed 2', 4' or 8' linear LED strips with New LED technology.


Choose between 3 aesthetic options: flat lens, dome lens or rounded lens, all provide energy savings and better quality lighting. These flexible options are cost effective and make this a perfect use for schools, retail, warehouse, storage or any other facility area.

### CONSTRUCTION

Describe materials used for manufacturing pan and other parts. Mention material type, gauge, and color.

### MOUNTING


List mounting options and possible kits/equipment needed.

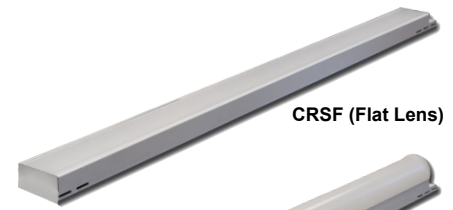

CRSF (Flat Lens)



CRSD (Dome Lens)

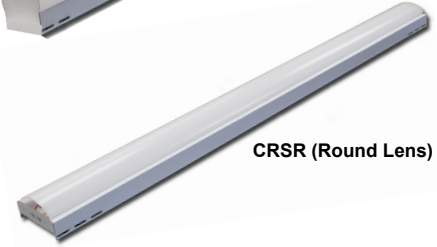

CRSR (Round Lens)

**FIXTURE DIMENSIONS**  
48L: 4.25"W x 47.938"L  
96L: 4.25"W x 95.994"L

### SPECIFICATIONS

- Surface mount fixture fits most ceiling types
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty





CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# CRSD/CRSF/CRSR LED PREMIUM STRIP

## ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

Sample Part Number:

SERIES	LENGTH		WATTAGE*		DRIVER		CCT/CRI	
CRSF LED Strip Flat Lens	48L	48"L	T30W3500L	30 Watts, 3,500 Lumens	DMV	120-277VAC 0-10V Dimming	30K	3000K 80 CRI
			T41W4300L	41 Watts, 4,300 Lumens			35K	3500K 80 CRI
			T58W6700L	58 Watts, 6,700 Lumens			40K	4000K 80 CRI
CRSD LED Strip Dome Lens	96L	96"L	T60W6900L	60 Watts, 6,900 Lumens			50K	5000K 80 CRI
			T82W8900L	82 Watts, 8,900 Lumens				
			T116W13400L	116 Watts, 16,400 Lumens				
CRSR LED Strip Round Lens								


\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.


CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

Description of Series  
 Fixtures


## PRODUCT DIMENSIONS



**CRSF (Flat Lens)**




**CRSD (Dome Lens)**



**CRSR (Round Lens)**

### 4ft Dimensions

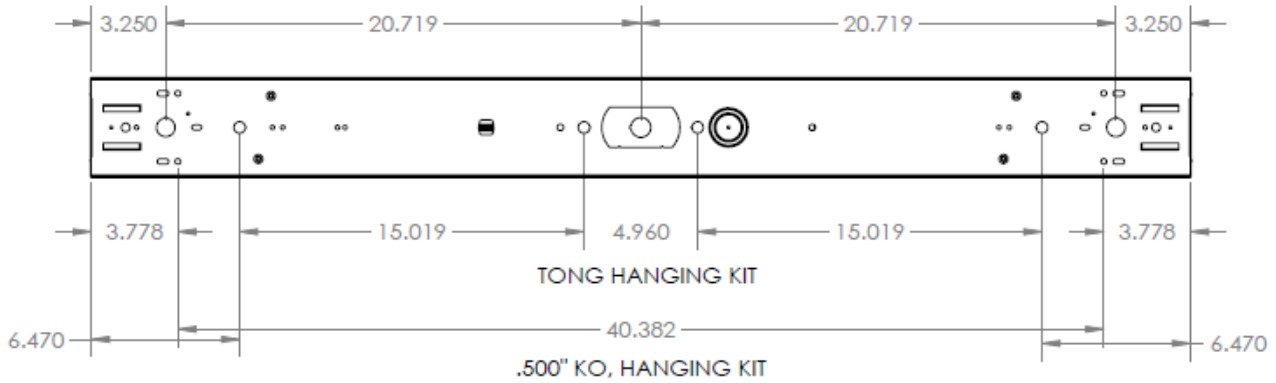

### 8ft Dimensions

