



JOB NAME:

CAT#:

TYPE:

APPLICATIONS


The CPYSA provides exceptional glare control and wide distribution. This fixture is ideally suited for parking structures, storage areas, shopping area walkways, entryway, and low level security.

FEATURES & BENEFITS

- Sealed die-cast profile for indoor and outdoor applications
- Replaces 100W MH to 175W MH
- Optional bi-level motion sensor
- Ambient operating temperature -40°C to 45°C (-40°F to 113°F)
- ^cUL_{US} listed
- 5 year warranty



DIMENSIONS

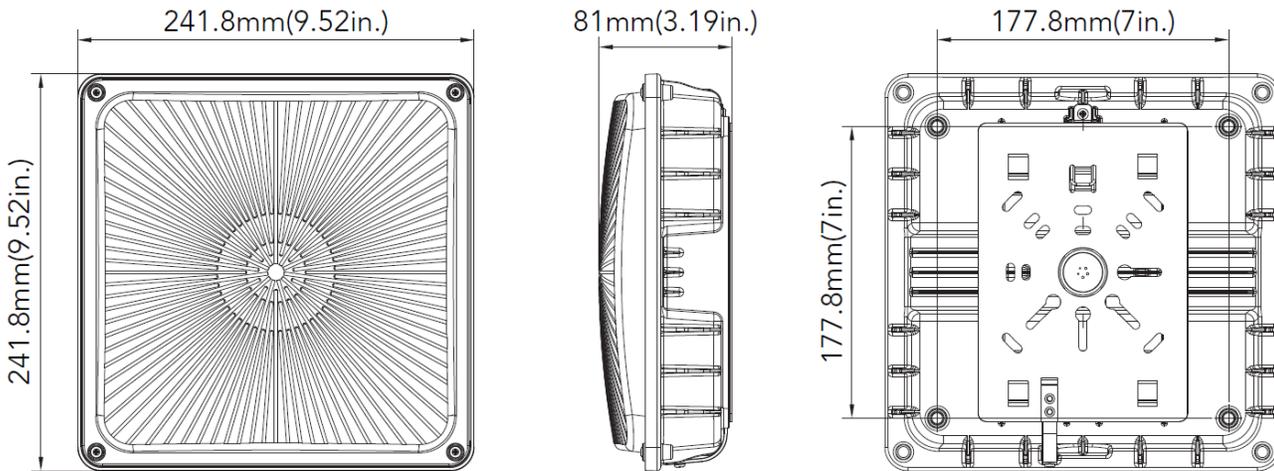




JOB NAME:

CAT#:

TYPE:

DIMENSIONS

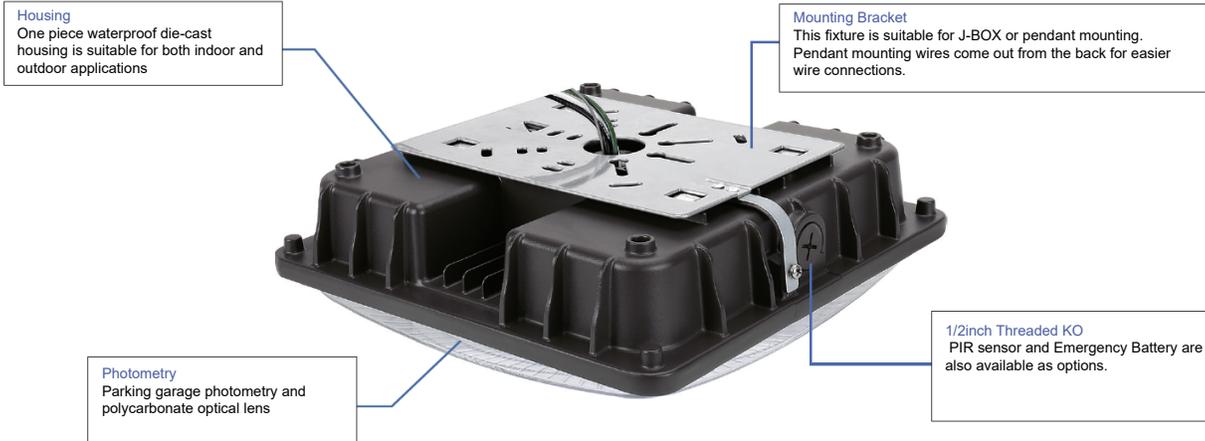

ORDERING

EXAMPLE: CPYSA 10 LED 40 DMV BZ 40 OS EM

CPYSA		LED						
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS ¹		5. DRIVER		6. FINISH ²	
CPYSA	10 10 inches	LED	27	27 Watts 3800 Lumens	DMV	0-10V Dimming 120-277VAC Multivolt	BZ	Bronze
			40	40 Watts 5450 Lumens	MV	120-277VAC	40	4000K ³
			60	60 Watts 8000 Lumens			50	5000K
8. SENSOR (O) ⁴		9. EMERGENCY (O) ⁴						
OS	Occupancy sensor ⁵	EM	10 Watt 1300 Lumen Battery Backup ⁵					

Notes:

- ¹Lumens at 5000K
- ²Consult for other options
- ³Special order only
- ⁴(O) is optional
- ⁵Shipped loose

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:

TYPE:

PHOTOMETRICS

