



JOB NAME:

CAT#:

TYPE:

**APPLICATIONS**

Wall mount in short and long tail and post top is available in a variety of lamp configurations. Molded plastic in white and black has white acrylic to hide the fluorescent lamp and clear prismatic ideal for incandescent options.

**FEATURES & BENEFITS**

- Available in black or white with white or frosted prismatic polycarbonate lenses
- Fade and rust resistant composite constructions
- High power factor
- <sup>c</sup>UL<sub>us</sub> listed for wet locations
- 3 year warranty for MV and INC w/ lamp
- 5 year warranty for LED dimmable 120V Ambient temperature -40°C - +40°C
- Wall or ceiling mount



**FB155 Style**





**FB156 Style**




**FB255 Style**

**DIMENSIONS**

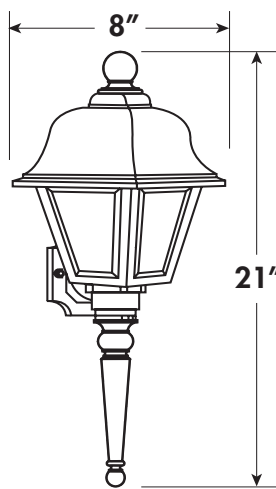

**EXTENDS: 9"**

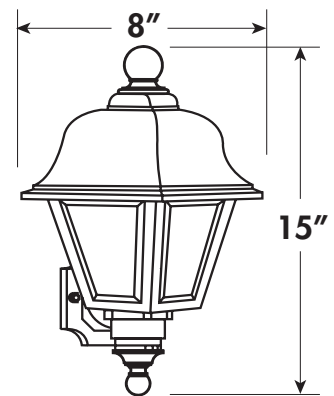

**EXTENDS: 9"**





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: FB155 LE800 W W F P

**LE800**

1. STYLE	2. LIGHT SOURCE	3. COLOR TEMP	4. BODY	5. DIFFUSER	6. OPTIONS <sup>1</sup>
<b>FB155</b> Wall Mount Long Tail	<b>LE800</b> 13W Power Input, CRI 80 >88 Lumens Per Watt (TYP)	<b>W</b> 3000K	<b>W</b> White	<b>C</b> Clear	<b>P</b> Photocell*
<b>FB156</b> Wall Mount Short Tail		<b>C</b> 4000K	<b>B</b> Black	<b>W</b> White	
<b>FB255</b> Post Mount				<b>F</b> Glare Free Frost	

**ORDERING (INCANDESCENT)**

EXAMPLE: FB155 I60 W F LWE

**I60**

1. STYLE	2. LIGHT SOURCE	3. BODY	4. DIFFUSER	5. LAMPING
<b>FB155</b> Wall Mount Long Tail	<b>I60</b> 1 X 60W Max	<b>W</b> White	<b>F</b> Frosted Prismatic	<b>LWE</b> A19/E26, 3000K
<b>FB156</b> Wall Mount Short Tail		<b>B</b> Black		<b>LCE</b> A19/E26, 4000K
<b>FB255</b> Post Mount				<b>W</b> White

**Notes:**

<sup>1</sup>Photocell not available for FB255 style

