



JOB NAME:

CAT#:

TYPE:

**APPLICATIONS**

Non-Metallic outdoor lighting. Choice of white or black molded plastic in a choice of styles and incandescent, fluorescent or LED versions. UL listed for wet location. Photocell optional. Energy Star rated when used with electronic ballast and photocell.

**FEATURES & BENEFITS**

- Available in black or white with white or frosted prismatic polycarbonate lenses
- Fade and rust resistant composite constructions
- High power factor
- <sup>c</sup>UL<sub>us</sub> listed for wet locations
- 3 year warranty for MV and INC w/ lamp
- 5 year warranty for LED dimmable 120V Ambient temperature -40°C - +40°C
- Wall or ceiling mount



**FR113 Style**



**FR111 Style**




**FR112 Style**




**FR211 Style**


**DIMENSIONS**

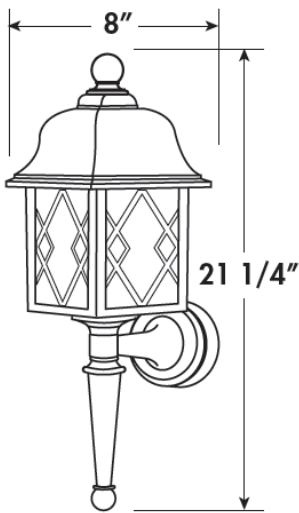


EXTENDS: 8 1/2"  
HCMT: 13 1/4"

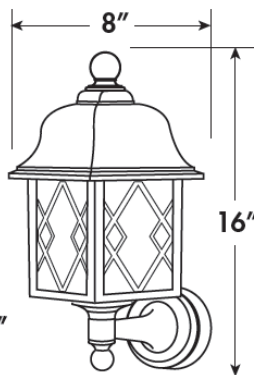

EXTENDS: 8 1/2"  
HCMT: 13 1/4"



EXTENDS: 8 1/2"  
HCMT: 2 3/4"

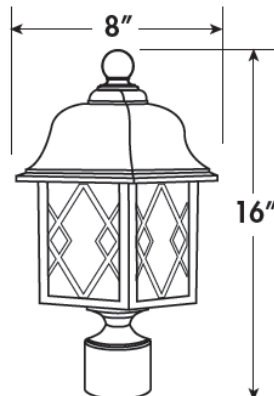



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: FR113 LE800 W W C P

**LE800**

1. STYLE	2. LIGHT SOURCE	3. COLOR TEMP	4. BODY	5. DIFFUSER	6. OPTIONS <sup>1</sup>
<b>FR111</b> Wall Mount No Tail	<b>LE800</b> 13W Power Input, CRI 80 >88 Lumens Per Watt (TYP)	<b>W</b> 3000K	<b>W</b> White	<b>C</b> Clear	<b>P</b> Photocell*
<b>FR112</b> Wall Mount Short Tail		<b>C</b> 4000K	<b>B</b> Black	<b>F</b> Frost	
<b>FR113</b> Wall Mount Long Tail					
<b>FR211</b> Post Mount					

**ORDERING (INCANDESCENT)**

EXAMPLE: FR113 I60 W C LWE

**I60**

1. STYLE	2. LIGHT SOURCE	3. BODY	4. DIFFUSER	5. LAMPING
<b>FR111</b> Wall Mount No Tail	<b>I60</b> 1 X 60W Max	<b>W</b> White	<b>C</b> Clear	<b>LWE</b> A19/E26, 3000K
<b>FR112</b> Wall Mount Short Tail		<b>B</b> Black	<b>F</b> Frost	<b>LCE</b> A19/E26, 4000K
<b>FR113</b> Wall Mount Long Tail				
<b>FR211</b> Post Mount				

**Notes:**

<sup>1</sup>Photocell not available for FR211 style

