



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Specification grade, modular linear lighting luminaire in a geometric 6 inch shape. For use in indoor applications where individual or continuous lighting is desired for general or perimeter lighting applications. The L66 LED Series is available in surface, pendant (suspended) or recessed. Recessed L66 Series are available for T-bar installation without a flange or for flanged construction for sheetrock installation. Pendant and surface mount configurations allow direct light only. Pendant mounted fixtures can be used with cable kits or rigid stem kits specified separately. Surface and pendant fixtures can be painted in a variety of finishes for the right look for your application.



Housing is die-formed and welded of heavy gauge cold rolled steel. Knockouts on the ends allow continuous wireway mounting. Fixtures can be hung in various types of recessed ceilings. Leveling lugs are available to support regular recess units. All metal parts are cleaned and treated with a three-stage phosphate coating. These are electrostatically sprayed with high quality white baking enamel providing a minimum of 67% reflectivity.



FEATURES & BENEFITS

- 6.0W x 6.0H (See Dimensions)
- Various lenses lie on the side flanges
- 6' and 8' units have a steel mullion to join two individual diffusers
- Baffled louver is available to shield glare
- Recessed versions are all IC Rated (L66R,L66RF,L66RR)
- cETL_{us} listed

DIMENSIONS

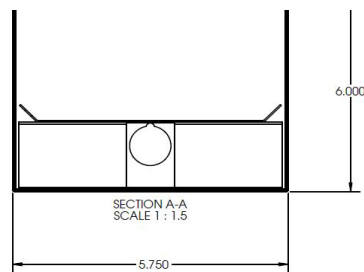

Baffled Louver (BL)

Dimensions and specifications subject to change without notice.







JOB NAME:

CAT#:



TYPE:

DIMENSIONS

4FT Dimensions

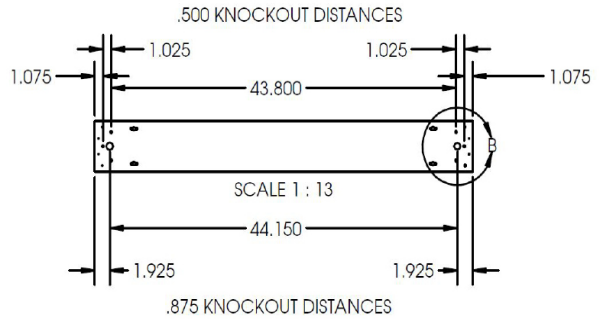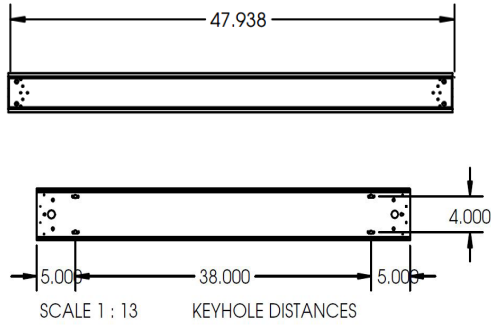

8FT Dimensions

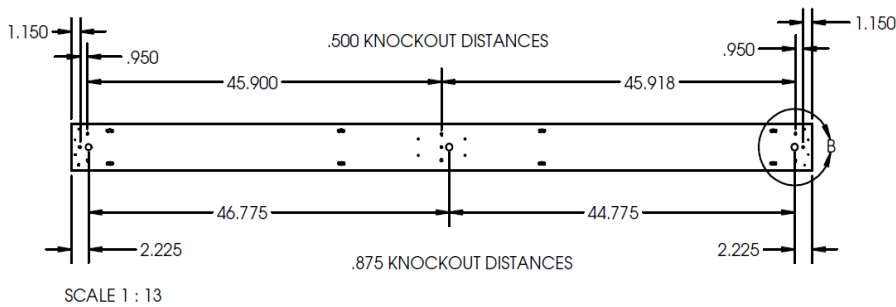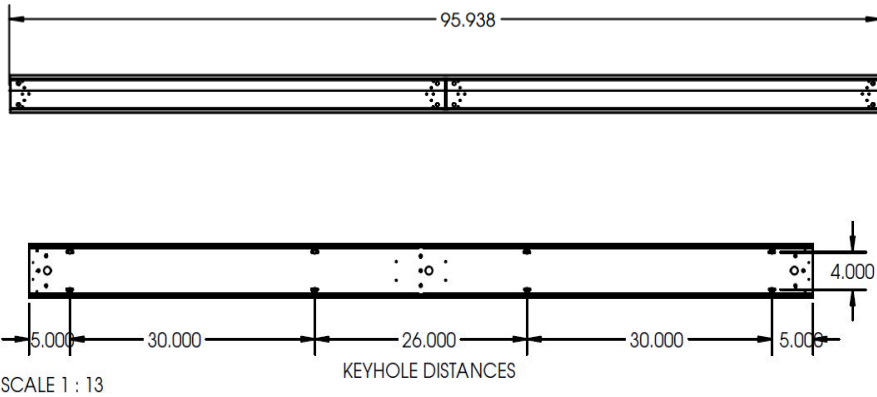

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: L66R 48 LED 24 DMV WH S5 30 EM HC301WH P11

LED

1. SERIES	2. LENGTH	3. GEAR	4. LIGHT DISTRIBUTION	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH
L66R¹ Regular Recessed Lay-in	48¹ 48" long	LED	Blank Downlight std. U Uplight 1U2D Up and Downlight	Up or Down Only 4 ft.	DMV 120-277V Multivolt Dimmable 0-10V	WH Matte White SL Silver
	96¹ 96" long					
L66RF Recessed w/ Flange				24 24W 2400 Lumens 35 35W 3400 Lumens 48 48W 4800 Lumens	SDMV Step dimming Multivolt	BK Matte Black BZ Bronze
L66RR Recessed w/ 1/2" Flange for Drywall				57 57W 5400 Lumens 72 72W 7000 Lumens		
L66S Surface Mounted				8 ft.	DHV 347-480VAC 0-10V Dimming	IN Iron
L66W Wall Mounted				97 97W 9600 Lumens 114 114W 10800 Lumens		
L66P Pendant Mounted				Up/Down 4 ft.	D347V 347VAC 0-10V Dimming	TDMV Triac Dimming 120-277VAC
				24 24W 800U-1600D 36 36W 1200U-2400D 48 48W 1600U-3200D 57 57W 1900U-3800D 72 72W 2400U-4800D		
				8 ft.	D120 Triac Dimming 120VAC	D277 Triac Dimming 277VAC
				48 48W 1600U-3200D 72 72W 2400U-4800D 97 97W 3200U-6400D 108 108W 3600U-7200D 114 114W 3600U-7200D		

8. LENS MATERIAL	9. COLOR TEMP	10. REFLECTOR(O) ³	11. EMERGENCY(O) ³	12. CABLE(O) ³
S5 Specular parabolic louver	30 3000K 35 3500K	Blank Standard WW White Wash M35 Assymetrical reflector for wall wash	EM Emergency Battery Pack 10W ~ 1700 lumens EM5 Emergency Battery Pack 5W ~ 850 Lumens	HC301WH 4' cable kit with white canopy HC301WH5W 4' cable kit + power feed 0-10V dimming Cable incl. w/white canopy (5 wire) HC302WH 12' cable kit with white canopy HC302WH5W 12' cable kit + power feed; 0-10V dimming Cable incl. w/white canopy (5 wire) HC401WH Cable kit with 4' cable & 3 wire power feed/cable incl. and white canopy 2SCS24WH Two stem kits w/24" stem canopy & mount hardware for 4 ft. fixture
W5 White cubed acrylic louver	40 4000K 50 5000K			
A Prismatic acrylic #12 pattern				
BL Baffled Louver ²				
MW Matte white lens				
SF Snap-in Frosted (85% transmission)				

13. PLUG IN(O) ³
P11 3 wire harness, including white, black and green
P12 4 wire harness, including white, black, green and blue for emergency backup
P13D 5 wire harness, including white, black, green, violet and gray

14. CONFIGURATION
BLANK Individual
-B Beginner Run
-E Ender Run
-J Joiner

NOTES

Custom louvers available in any cell configuration. Consult factory for additional information.
¹4 Recessed grid fixtures will be 1-2" shorter than specified length
²Only available for downlight side of fixture
³O is Optional

Dimensions and specifications subject to change without notice.

